



Monitoring report form for CDM programme of activities
(Version 02.0)

Complete this form in accordance with the instructions attached at the end of this form.

MONITORING REPORT

Title of the PoA	Improved cookstove program in Bangladesh supported by the Republic of Korea	
UNFCCC reference number of the PoA	10431	
Version numbers of the PoA-DD applicable to this monitoring report	4.0	
Version number of this monitoring report	1.0	
Completion date of this monitoring report	12/11/2018	
Monitoring period number	First Monitoring Period	
Duration of this monitoring period	31/08/2018 – 10/09/2018	
Monitoring report number for this monitoring period	1.0	
Coordinating/managing entity	Ecoeye Co., Ltd.	
Host Parties	Host Party of the PoA	Is this the host Party of a CPA covered in this monitoring report? (yes/no)
	Bangladesh	Yes
Sectoral scopes	Sectoral Scope 3: Energy Demand	
Applied methodologies and standardized baselines	Approved Methodology: AMS II.G. – “Energy efficiency measures in thermal applications of non-renewable biomass” (version 08.0) Standardized Baseline: Not applicable	
Amount of GHG emission reductions or net anthropogenic GHG removals achieved by all CPAs covered in this monitoring report in this monitoring period	Amount achieved before 1 January 2013	Amount achieved from 1 January 2013
	NA	2,338 tCO ₂ e
Amount of GHG emission reductions or net anthropogenic GHG removals estimated ex ante for this monitoring period in the CPA-DDs for the CPAs covered in this monitoring report	45,963 tCO ₂ e	

PART I Monitoring of programme of activities (PoA)

SECTION A. Description of PoA

A.1. General description of PoA

>>

The PoA involves distribution of biomass based improved cookstoves (“ICS”) to households / SMEs in Bangladesh.

Biomass accounts for 90% of Bangladeshi households’ energy needs with fuelwood being used in around 84% households for cooking purposes (section 1.5, page 8, Country Action Plan for Clean Cookstoves). Also, more than 90% households still use traditional stoves for cooking¹.

The current cooking practice in Bangladesh is the use of “three-stone” cooking stove, popularly known as traditional stoves. 98–99% of Bangladesh rural population burns biomass fuels by using traditional cookstoves for cooking and heating. Households generally construct traditional cookstoves themselves with locally available materials and use biomass fuels².

As per World Bank Report, ~95 percent of Bangladeshi households collect or purchase biomass to cook all or part of their meals, mainly using fixed clay stoves. The inherent inefficiency of such stoves, combined with the high moisture content of biomass cooking fuels, results in incomplete combustion, producing IAP³. Thus, biomass combustion with traditional cookstoves causes substantial environmental and health harm.

The PoA attempts to address the aforesaid issues, by effecting widespread adoption of ICS to households across Bangladesh. These ICS burn fuel more efficiently and are designed to reduce smoke, PM and other gaseous emissions, thus creating cleaner indoor air for women and children. Due to their higher thermal efficiency relative to traditional stoves, ICS reduce the amount of biomass fuel consumption for meeting the similar thermal energy needs.

This PoA is managed by Ecoeye Co., Ltd. (EECL) as the Coordinating/Managing Entity (CME) and focal point for communications with CDM Executive Board. EECL is a company registered in the Republic of Korea, under company number 314 81 73570, whose registered office is at B-1503, 70 Dusan-ro, Geumcheon-gu, Seoul, Korea. EECL coordinates with the CPA Implementers for managing the PoA. EECL provides all the implementation costs including the operation and maintenance costs for the CPA implementation to ensure that the ICS are available at an affordable price to the potential users.

A.1.1. Corresponding generic component project activities (CPAs)

Title and reference number of the corresponding generic CPA	Version of the PoA-DD	Sectoral scopes	Applied methodologies and standardized baselines
Improved cookstove program in Bangladesh supported by the Republic of Korea – CPA # Generic CPA 01	Version 4.0 Date 21/06/2018	Sectoral Scope 3 Energy Demand	AMS II.G.: “Energy efficiency measures in thermal applications of non-renewable biomass” (version 08.0)

¹ Country Action Plan for Clean Cookstoves, November 2013, Power Division, Ministry of Power, Government of the People’s Republic of Bangladesh, page 39

² Peer review paper published in PNAS, July 3, 2012, vol. 109, no. 27, 10815–10820, “Low demand for non-traditional cookstove technologies” by Mobarak et al

³ Special Report - Restoring Balance: Bangladesh’s Rural Energy Realities, Executive Summary, page xx

A.1.2. CPAs included in the PoA

Title and UNFCCC reference number of the CPA	Title and reference number of the corresponding generic CPA	Version of the PoA-DD	Crediting period type and duration	Covered in this monitoring report? (yes/no)
Improved cookstove program in Bangladesh supported by the Republic of Korea – CPA 01 10431-0001	Improved cookstove program in Bangladesh supported by the Republic of Korea – CPA # Generic CPA 01 Date 21/06/2018	Version 4.0 Date 21/06/2018	Fixed 31/08/2018 – 30/08/2028	Yes

A.2. Coordinating/managing entity

>>

Ecoeye Co., Ltd.

SECTION B. Implementation of PoA**B.1. Description of implemented PoA**

>>

Ecoeye Co., Ltd. (EECL) is the CME of the PoA EECL manages the following responsibilities as the CME of the implemented PoA:

- EECL manages the PoA besides financing the PoA implementation costs.
- EECL identified BBF as the CPA Implementor for CPA 10431-0001 and established CER ownership agreement with BBF;
- EECL performed cross-checks on the ICS sales information received against Sales records received from the BBF
- EECL performed the QA/QC of the monitoring data and ER calculations
- EECL contracted the DoEs for validation / verification of the PoA/CPA.
- Training and capacity development of BBF/local partners as required

Bangladesh Bondhu Foundation (BBF) is the CPA implementer of the implemented CPA 01 (10431-0001) and performed the following responsibilities:

- BBF identified local partners for manufacturing and installation of ICS;
- BBF along with local partner executed the CER ownership agreement with ICS users to establish BBF/EECL as the CER beneficiary;
- The BBF installed project ICS through a network of local partners and collected relevant information required by the registered monitoring plan.
- Further BBF, Implemented the monitoring plan, determined the sample size, conducted ex-post inspections, monitoring surveys and tests as per registered monitoring plan, performed QA/QC of collected data and calculated emissions reductions.
- Training and capacity development of local partners as required, towards data collection at the time of installation or otherwise

Thus, EECL and BBF ensured that the PoA Operational and Management Plan as given in section B of the registered PoA-DD is duly implemented for the concerned CPA.

B.2. Post-registration changes to PoA**B.2.1. Corrections**

>>

N/A

B.2.2. Inclusion of monitoring plan

>>
N/A

B.2.3. Permanent changes to the registered monitoring plan, or permanent deviation of monitoring from the applied methodologies, standardized baselines, or other applied standards or tools

>>
N/A

B.2.4. Changes to programme design

>>
N/A

PART II Monitoring of CPAs

>>

This Monitoring Report covers CPA 10431-0001. This CPA follows the generic CPA as identified in section A.1.1, Part I of this monitoring report above.

SECTION C. Implementation of CPAs**C.1. Description of implemented CPAs**

>>

a) Purpose of the CPA(s) and the measures taken for GHG emission reductions or net GHG removals by sinks

The purpose of the CPA 10431-0001 is dissemination of high efficiency biomass (wood-fuel) fired ICSs (technology/measure) to replace the existing traditional (wood-fuel) cookstoves/three stone fires in beneficiary households/SMEs in Bangladesh. EECL in association with other Korean entity (ies) provides for all implementation costs for the CPA. EECL also provides subsidy to make ICS affordable to households, as well as for the operation & maintenance costs of ICS production and distribution to CPA implementers, to operate the CPA in a financially sustainable condition.

b) Description of the installed technology, technical processes and equipment

The CPA includes dissemination of 1 Pot and 2 Pot (models), high efficiency improved wood-fuel based cooking stoves (Bondhu Chulha) for meeting the thermal energy needs of beneficiary households. The ICS replace traditional inefficient wood-fuel cookstoves/3-stone fires in the baseline.

ICSs are designed to increase heat transfer to the cooking pot, while being suitable for traditional utensils and cooking habits of people in Bangladesh. The improvement in thermal efficiency is achieved by optimizing the dimensions of the ICS combustion chamber and ensuring effective airflow to aid complete combustion of biomass.

c) Information on implementation and actual operation of the CPAs including relevant dates for the CPA(s) (e.g. construction, commissioning, continued operation periods, etc.);

The following table details the implementation and actual operation status of the CPA along with technology involved:

CPA	Type of ICS eligible	Stove models included	Total number of ICS
10431-0001	Woodfuel	1 PoT model, 2 Pot Model	50,775

Relevant dates

CPA	10431-0001
Start Date (as per registered CPA-DD)	15/02/2018
Crediting Period Start Date	31/08/2018

Date of first stove installed under the CPA	15/02/2018
---------------------------------------------	------------

C.2. Location of CPAs


>>

Host Party(ies): Bangladesh

Region/State/Province: All across Bangladesh

City/Town/Community: All across Bangladesh

Physical Geographical location: The geographical boundary of Bangladesh is depicted by the map given below.

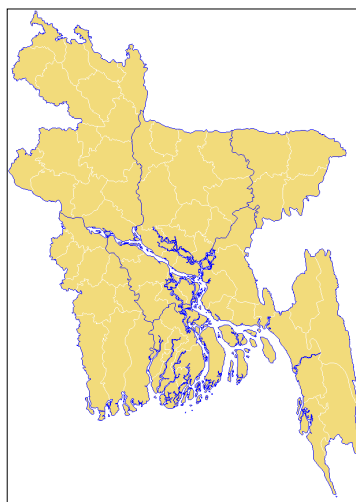

Each ICS has a unique serial number. The same is recorded in the database to trace the ICS later and avoid double counting. Further, for each ICS included under each CPA, the address of the user is recorded at the time of ICS installation. Thus, location of each ICS in CPA distribution database can be traced. The system of unique serial number for each ICS unit along with its location serves toward avoiding double counting of ICS under the PoA as well as ensures unique identification of the ICS as well as CPA.

C.3. Post-registration changes to CPAs

C.3.1. Temporary deviations from the monitoring plans in the included CPA-DDs, applied methodologies or standardized baselines

>>

N/A

C.3.2. Corrections

>>

N/A

C.3.3. Changes to the start date of the crediting period

>>

N/A

C.3.4. Inclusion of monitoring plan

>>

N/A

C.3.5. Permanent changes to the included monitoring plans, or permanent deviation of monitoring from the applied methodologies, standardized baselines, or other applied standards or tools

>>

N/A

C.3.6. Changes to project design

>>

N/A

SECTION D. Description of monitoring system of CPAs

>>

BBF maintains a CPA database where information of ICS installed under the CPA is recorded. BBF directly or via its local partners collects the agreement cum sales record for each ICS at the point of installation. The Sales Record contains:

- 1) Name of Customer
- 2) Address/Location of the customer, including contact details, if any
- 3) Unique identification number of ICS (serial number)
- 4) ICS Model (1 Pot / 2 Pot)
- 5) ICS Date of installation
- 6) Type of stove replaced by ICS and fuel used in baseline

All other monitoring activities are carried out at the CPA level on a sampling basis as explained in section E.3 below.

Training were conducted/ team with prior monitoring experience was selected to ensure that monitoring staff had the appropriate skills and expertise to administer relevant surveys / tests and quality checks, ensuring the integrity of information flow to the CME.

SECTION E. Data and parameters**E.1. Data and parameters fixed ex ante**

Data/Parameter	$B_{old,p}$
Unit	tonnes/person/year
Description	Annual quantity of woody biomass that would have been used per person in the household in the absence of the project activity to generate useful thermal energy equivalent to that provided by the project devices
Source of data	Registered CPA-DD section B.4.2
Value(s) applied	0.50
Choice of data or measurement methods and procedures	Default value specified by the methodology AMS II.G. version 8.0
Purpose of data/parameter	To calculate baseline emission (For parameter $B_{old,HH}$)
Additional comments	

Data/Parameter	$N_{p,HH}$
Unit	Number
Description	Average number of persons served per household prior to the project implementation
Source of data	Registered CPA-DD section B.4.2
Value(s) applied	4.6
Choice of data or measurement methods and procedures	Published information / literature defining the average household size in the project region available at: https://www.unicef.org/bangladesh/MICS_Final_21062015_Low.pdf
Purpose of data/parameter	To calculate baseline emission (For parameter $B_{old,HH}$)

Additional comments	
---------------------	--

Data/Parameter	$B_{old,HH}$
Unit	tonnes/household/year
Description	Annual quantity of woody biomass that would have been used in the household in the absence of the project activity to generate useful thermal energy equivalent to that provided by the project devices
Source of data	Calculated
Value(s) applied	2.3
Choice of data or measurement methods and procedures	Calculated as $B_{old,p} * N_{p,HH}$
Purpose of data/parameter	To calculate baseline emission (For parameter $B_{old,i,j}$)
Additional comments	As only one ICS unit is distributed per household, hence $B_{old,HH} = B_{old,i,j}$ The presence of multiple project ICS in a household determined ex-post during surveys and the total ICS population discounted by the fraction of sampled household found using more than one project ICS.

Data/Parameter	$f_{NRB,y}$
Unit	Fraction
Description	Fraction of woody biomass saved by the project activity during year y that can be established as non-renewable biomass
Source of data	Registered CPA-DD section B.4.2
Value(s) applied	0.843
Choice of data or measurement methods and procedures	Calculated as per para 27 – 30 of AMS II.G. version 08.0 and Tool: Calculation of the fraction of non-renewable biomass, EB 97, Annex 9
Purpose of data/parameter	To calculate baseline emission
Additional comments	

Data/Parameter	$EF_{project_fossilfuel}$
Unit	tCO ₂ e/TJ
Description	Emission factor for the fossil fuels projected to be used for substitution of non-renewable woody biomass by similar consumers
Source of data	Registered CPA-DD section B.4.2
Value(s) applied	81.6
Choice of data or measurement methods and procedures	Default value specified by the methodology AMS.II-G ver 08.0, equation (2) on page 5
Purpose of data/parameter	To calculate baseline emission
Additional comments	

Data/Parameter	LAF_y
Unit	Fraction
Description	Leakage adjustment factor
Source of data	Registered CPA-DD section B.4.2
Value(s) applied	0.95
Choice of data or measurement methods and procedures	As per the methodology AMS II.G ver 08.0, Gross adjustment factor of 0.95 to account for leakages, in which case surveys are not required
Purpose of data/parameter	Leakage calculation
Additional comments	

Data/Parameter	$NCV_{biomass}$
Unit	TJ/tonne
Description	Net calorific value of the non-renewable woody biomass, briquettes or charcoal used in project devices.
Source of data	Registered CPA-DD section B.4.2
Value(s) applied	0.015
Choice of data or measurement methods and procedures	IPCC default for wood fuel, 0.015 TJ/tonne, based on the gross weight of the wood that is 'air-dried' has been used as fuel used in project device is also woody biomass.
Purpose of data/parameter	To calculate baseline emission
Additional comments	

Data/Parameter	$\eta_{old,i,j}$
Unit	Fraction
Description	Efficiency of pre - project device, which is a three-stone fire using fuelwood (not charcoal), or a conventional device with no improved combustion air supply or flue gas ventilation
Source of data	Registered CPA-DD section B.4.2
Value(s) applied	0.11
Choice of data or measurement methods and procedures	Calculated
Purpose of data/parameter	To calculate baseline emission
Additional comments	

E.2. Data and parameters monitored

Data/Parameter	$N_{y,i,j}$
Unit	Number
Description	Number of project devices of type i and batch j operating during year y
Measured/calculated/default	Calculated
Source of data	Sales database and monitoring survey

Value(s) of monitored parameter		Year	ICS model	
			1 Pot	2 Pot
		2018	10,808	39,967
Monitoring equipment	Not applicable			
Measuring/reading/recording frequency	At least once every two years (biennial)			
Calculation method (if applicable)	<p>The CPA implementer is maintaining database of all the stove installed. A monitoring survey was conducted to determine the number of operating stoves of type i and batch j on a sampling basis. The formula used to calculate the operational stove of type i and batch j is as follows:</p> $N_{y,i,j} = (n_{i,j,operational} / n_{i,j,total}) * N_{y,i,j,installed}$ <p>Where: N = number of stoves n = number of samples</p>			
QA/QC procedures	A 95 /10 confidence / margin of error is applied for the sampling parameter as per para 22 of Standard: Sampling and surveys for CDM project activities and programmes of activities, Version 07.0			
Purpose of data/parameter	To calculate baseline emissions			
Additional comments	<p>All data sources will be archived for two years</p> <p>During the stove installation, the presence of existing project ICS, if any, was recorded in the Sles record and subsequent (second) ICS, if any, has not been included in the ER calculations.</p> <p>Also, this was further cross-checked on sampling basis during the Ex-post monitoring survey, the total ICS population has been discounted by the fraction of sampled household found using more than one project ICS.</p>			

Data/Parameter	μ_y								
Unit	Fraction								
Description	Adjustment to account for any continued use of pre-project devices during the year y								
Measured/calculated/default	Calculated								
Source of data	Monitoring survey								
Value(s) of monitored parameter	<table><tr><th rowspan="2">Year</th><th colspan="2">ICS Model</th></tr><tr><th>1 Pot</th><th>2 Pot</th></tr><tr><td>2018</td><td>1.00</td><td>1.00</td></tr></table>	Year	ICS Model		1 Pot	2 Pot	2018	1.00	1.00
Year	ICS Model								
	1 Pot	2 Pot							
2018	1.00	1.00							
Monitoring equipment	Not applicable								
Measuring/reading/recording frequency	At least once every two years (biennial)								
Calculation method (if applicable)	<p>The sampled households were checked for presence of baseline stove and if it was being used along with project stove for cooking. For samples where baseline stove was found not being used, $\mu_y = 1.0$.</p> <p>For samples where the baseline stove is found to be in use, μ_y has been determined as:</p> <ul style="list-style-type: none">ratio of frequency of usage (i.e. number of meals cooked on ICS Vs total number of meals cooked on ICS and baseline stove)								

QA/QC procedures	A 95 /10 confidence / margin of error is achieved for the sampling parameter as per para 22 of Standard: Sampling and surveys for CDM project activities and programmes of activities, Version 07.0
Purpose of data/parameter	To calculate baseline emissions
Additional comments	All data sources will be archived for two years

Data/Parameter	$\eta_{new,i,j}$										
Unit	Fraction										
Description	Efficiency of the project device of each type i and batch j										
Measured/calculated/default	Calculated										
Source of data	Efficiency test records										
Value(s) of monitored parameter	<table><tr><th rowspan="2">Year</th><th colspan="2">ICS Model</th></tr><tr><th>1 Pot</th><th>2 Pot</th></tr><tr><td>2018</td><td>33.68%</td><td>34.25%</td></tr></table>	Year	ICS Model		1 Pot	2 Pot	2018	33.68%	34.25%		
Year	ICS Model										
	1 Pot	2 Pot									
2018	33.68%	34.25%									
Monitoring equipment	<p>The equipment were newly purchased (08 October 2018) at the time of use so measurements were done with the necessary guarantees.</p> <p>The following equipments were used for conducting WBTs</p> <p>Digital Thermometer Manufacturer/Brand: Ritters Model: TP300 Number of units: 2 Accuracy: +/- 1⁰C</p> <p>Digital weighing scale Manufacturer/Brand: Venezia Model: SF550 Number of units: 2 Accuracy:0.5g</p> <p>Digital Moisture meter Manufacturer/Brand: Dr. Meter Model: MD912 Number of units: 2 Serial number: 1702074398, 1702074434 Accuracy:0.5%</p>										
Measuring/reading/recording frequency	Determined from a representative sample of each batch (2018 population covered unde the monitoring period)										
Calculation method (if applicable)	WBT protocol as at GACC website										
QA/QC procedures	Manufacturer’s thermal energy efficiency specification or certification based on WBT protocol										
Purpose of data/parameter	To calculate baseline emissions										
Additional comments	-										

Data/Parameter	Date of commissioning of project device i
Unit	Date
Description	Actual date of commissioning of project device
Measured/calculated/default	Measured
Source of data	Sales database

Value(s) of monitored parameter	Refer the sales database
Monitoring equipment	Not applicable
Measuring/reading/recording frequency	Recorded at the time of installation of project devices
Calculation method (if applicable)	Not applicable
QA/QC procedures	NA
Purpose of data/parameter	To calculate baseline emissions
Additional comments	Record will be archived for 2 years

E.3. Implementation of sampling plan

>>

a. List of CPA to which the sampling plan was applied

At present there is only one CPA implemented and covered under this monitoring report. The number of units installed under the CPA is as follows:

CPA#	Type of Project eligible under CPA	Total number of stoves in the CPA	CPA monitoring period covered under this PoA monitoring period
CPA-01	woodfuel	50,775	31/08/2018 – 10/09/2018

b. Description of implemented sampling design

Due to the large number of ICS installed under the CPA it was not economically feasible to monitor each individual ICS unit installed, therefore, a representative sampling was undertaken as part of CPA Sampling Plan. The Sampling Standard version 07.0 (paragraph 22) mandates application of 95/10 confidence/precision for CPAs solely composed of micro-scale CDM units hence the same was applied as a conservative measure despite the methodology taking precedence.

The objective of the sampling was to obtain an unbiased and reliable estimate of the proportion or mean value of the following parameters over the course of the monitoring period, and with 95/10 confidence/precision. The sampling plan consist of monitoring the following parameters as mentioned below:

S.No.	Monitoring Parameter	Description of Monitoring Parameter
1.	$N_{y,i,j}$	Number of project devices of type i and batch j operating during year y
2.	μ_y	Adjustment to account for any continued use of pre-project devices during the year y
3.	$\eta_{new,i,j}$	Efficiency of the project device of each type i and batch j

The target population is the total ICS population served under the CPA (and covered under the monitoring report), and the sampling frame consists of aggregated data of end-users of the ICS as recorded in the CPA Databases.

The sampling was conducted using stratified random sampling technique over the sampling frame. The ICS in the sampling frame were stratified by ICS model i (one pot or two pot) and batch j (year of installation). Thus, the population was categorised into two sampling strata (1 PoT₂₀₁₈ and 2 PoT₂₀₁₈) for identifying samples for monitoring. The sample size were calculated as per section B.5.2 of the registered CPA-DD. The expected parameter values (mean, standard deviation and proportion) have been determined based on project developer's knowledge and experience as per para 12(b) and 12(c) of the Sampling and surveys for CDM project activities and programmes of activities, Version 07.0

Parameter	Total population (N)	Expected results	Reliability	Sample Size (n) required ⁴	Samples covered during monitoring
$\eta_{\text{new},1 \text{ pot}, 2018}$	10,808	33.0% (mean); 3.3% (SD)	95/10	2	4
$\eta_{\text{new},2 \text{ pot}, 2018}$	39,967	34.0% (mean); 3.4% (SD)	95/10	6	10
$N_{y,1 \text{ pot}, 2018}$	10,808	0.95 (proportion)	95/10	7	36
$N_{y,2 \text{ pot}, 2018}$	39,967	0.95 (proportion)	95/10	24	54
$\mu_{y,1 \text{ pot}}$	10,808	0.90 (proportion)	95/10	10	36
$\mu_{y,2 \text{ pot}}$	39,967	0.90 (proportion)	95/10	34	54

Each ICS in the target strata, uniquely identifiable by its Stove ID number, was allocated a sample number, starting at 1 and increasing up to the total number of ICS in the strata. Random numbers were generated (100 in total, 40 for 1 pot stove population and 60 for 2 pot stove population) using online random number generator and the numbers obtained were used to identify the samples from the corresponding strata for monitoring. A little higher number of samples were selected for monitoring than that required to ensure that the desired precision / confidence is achieved as well as have cover for no-responses.

c. Collected data;

Data was collected for $N_{y,i,j}$ and μ_y following a specially design survey form. The information collected was introduced into an electronic database, the CPA Monitoring Record. The survey forms was design to allow the surveyor collect the necessary information from field visit for the ER calculations. As for the thermal efficiency of the stoves to determine $\eta_{\text{new},i,j}$, water boiling tests were conducted using WBT testing protocol given by GACC(WBT 4.2.3).

The monitoring suryes and WBTs were conducted in October 2018

d. Analysis of data collected and confidence/precision achieved;

Analysis of the data monitored through sampling revealed the following results:

S.No.	Monitoring Parameter	Value	Achieved Precision
1.	$N_{y,i,j}$	50,775	0%
2.	μ_y	1.00	0%
3.	$\eta_{\text{new},i,j}$	34.13%	0.03%

Sampling Constants	Values
Monitoring period start	31-Aug-18
Monitoring period end	10-Sep-18
Level of Sampling	CPA
Confidence (%) (90 or 95)	95%
Margin of Error (%)	10%
Z value	1.960

⁴ In case of mean parameters, the 'sample size required' mentioned above is the Student T-distribution adjusted sample size, as the initially calculated sample size was less than 30. This is in accordance with para 13 of Sampling and surveys for CDM project activities and programmes of activities, Version 07.0

Monitoring Parameter	Stove Efficiency $\eta_{new,i,j}$				
Sampling Frame requirement as per PoA-DD	Given stove model and vintage population				
Sampling approach	Stratified random sampling across stove model and vintage				
Sampling Population (i)	Batch (j)	Sampling frame size	Monitored Sample Size	Monitored Efficiency (%)	Monitored Standard Deviation
1 Pot	2018	10808	4	33.68%	0.10%
2 Pot	2018	39967	10	34.25%	0.10%
Reliability Check					
Samples Monitored					14
Mean Efficiency					34.13%
Standard error of mean					0.03%
Relative precision (Margin of error) (%)					0.00%
Result					Ok, reliability level met
Lower Bound confidence value					Not applicable

Monitoring parameter(s)		Stove Operating Fraction for determination of $N_{y,i,j}$		
Sampling frame(s)		Given stove model and vintage population		
Sampling approach		Stratified random sampling across stove model and vintage		
Sampling Population (Batch)	Sampling frame size	Monitored Sample Size ($n_{i,j,total}$)	Operational Sample ($n_{i,j,operational}$)	Monitored Operating Fraction ($n_{i,j,operational}/n_{i,j,total}$)
1 Pot	10808	36	36	1.00
2 Pot	39967	54	54	1.00
Reliability Check				
Samples Monitored			90	
SoF Measured			1.00	
Standard Error of SoF			0.00%	
Relative precision (Margin of error)			0.00%	
Result			Ok, reliability level met	
Lower Bound confidence value			Not applicable	

Monitoring parameter(s)	Utilization of Project stoves - μ_y		
Sampling frame(s)	Given stove model population		
Sampling approach	Stratified random sampling across stove models		
Sampling Population	Sampling frame size	Monitored Sample Size	Monitored Utilization
1 Pot	10808	36	1.00
2 Pot	39967	54	1.00
Reliability Check			
Samples Monitored		90	
Utilization Measured		1.00	
Standard Error of Utilization		0.00%	
Relative precision (Margin of error)		0.00%	
Result		Ok, reliability level met	
Lower Bound confidence value		Not applicable	

For detailed calculations refer ER calculator, worksheet 'Monitoring Survey' and 'WBT Summary'.

1. Demonstration of whether the samples were randomly selected and are representative of the population.

ICS were selected randomly after arranging them in chronological order of date of sale and assigning a sampling number to each ICS in each strata. Random numbers were generated using online random number generator available at <http://stattrek.com/statistics/random-number-generator.aspx> separately for each strata and the ICS corresponding to random number received were selected from sampling strata for monitoring. The approach ensured that each ICS in the sampling strata had equal chances of being selected and the the samples picked represent the ICS population.

SECTION F. Calculation of emission reductions or net anthropogenic removals

F.1. Calculation of baseline emissions or baseline net removals

>>

The emission reductions are calculated as follows:

As per the SSS-PoA-DD, emission reductions for the SSC-CPA (10431-0001) has been calculated as per the following formulas given in the applicable meth, AMS-II.G. version 08.0;

$$ER_y = \sum_i \sum_j ER_{y,i,j} - LE_y$$

Where

i	=	Indices for the situation where more than one type of project device is introduced to replace the pre-project devices ⁵
j	=	Indices for the situation where there is more than one batch of project device
ER_y	=	Emission reductions during year y in t CO ₂ e
$ER_{y,i,j}$	=	Emission reductions by project device of type i and batch j during year y in t CO ₂ e
LE_y	=	Leakage emissions in the year y

Where

$$ER_{y,i,j} = B_{y,savings,i,j} \times N_{y,i,j} \times \mu_y \times f_{NRB,y} \times NCV_{biomass} \times EF_{projected_fossil\ fuel}$$

Where

$B_{y,savings,i,j}$	=	Quantity of woody biomass that is saved in tonnes per cook stove device of type i and batch j during year y
$f_{NRB,y}$	=	Fraction of woody biomass that can be established as non-renewable biomass using survey methods or government data or default country specific fraction of non-renewable woody biomass (fNRB) values available on the CDM website
$NCV_{biomass}$	=	Net calorific value of the non-renewable woody biomass that is substituted (IPCC default for wood fuel, 0.015 TJ/tonne, based on the gross weight of the wood that is 'air-dried')
$EF_{projected_fossilfuel}$	=	Emission factor for the fossil fuels projected to be used for substitution of non-renewable woody biomass by similar consumers. Use a value of 81.6 t CO ₂ /TJ
$N_{y,i,j}$	=	Number of project devices of type i and batch j operating during year y
μ_y	=	Adjustment to account for any continued use of pre-project devices during the year y when applying equations 6 (fraction).

⁵ For example, in some instances, full replacement of the pre-project device would require the implementation of more than one project device (e.g. one stove suitable for cooking and the other stove suitable for cooking/boiling water)

$$B_{y,savings,i,j} = B_{old,i,j} \times \left(1 - \frac{\eta_{old,i,j}}{\eta_{new,i,j}} \right)$$

Where

- $B_{old,i,j}$ = Annual quantity of woody biomass that would have been used in the absence of the project activity to generate useful thermal energy equivalent to that provided by the project device type i and batch j
- $\eta_{new,i,j}$ = Efficiency of the device of each type i and batch j implemented as part of the project activity.
- $\eta_{old,i,j}$ = Efficiency of pre - project device, which is a three-stone fire using firewood (not charcoal), or a conventional device with no improved combustion air supply or flue gas ventilation, that is without a grate or a chimney;

$$B_{old,i,j} = B_{old,HH} = B_{old,p} \times N_{p,HH}$$

Where

- $B_{old,HH}$ = Annual quantity of woody biomass that would have been used in the household in the absence of the project activity to generate useful thermal energy equivalent to that provided by the project devices
- $B_{old,p}$ = Annual quantity of woody biomass that would have been used per person in the household in the absence of the project activity to generate useful thermal energy equivalent to that provided by the project devices
- $N_{p,HH}$ = Average number of persons served per household prior to the project implementation

Data Ex Ante	Unit	Value
$B_{old,p}$	tonnes/person/ year	0.50
$N_{p,HH}$	Number	4.60
$B_{old,i,j} = B_{old,HH}$	tonnes/household/ year	2.30
$f_{NRB,y}$	Fraction	0.84
$Ef_{project_fossil\ fuel}$	tCO _{2e} /TJ	81.60
LAF_y	Fraction	0.95
$NCV_{biomass}$	TJ/tonne	0.015
$\eta_{old,i,j}$	Percentage	11.00%

Data Ex Post	Unit	Value
$N_{y,1 \text{ Pot},2018,\text{Installed}}$	Number	10808
$N_{y,2 \text{ Pot},2018,\text{Installed}}$	Number	39967
$B_{\text{old},i,j}$	Tonnes/HH/year	2.19
$B_{\text{old}} - 2 \text{ Pot},2018$	Tonnes/HH/year	2.19
$\eta_{\text{new } 1 \text{ Pot}, 2018}$	Percentage	33.68%
$\eta_{\text{new } 2 \text{ Pot}, 2018}$	Percentage	34.25%
$B_{y,\text{saving}, 1 \text{ Pot},2018}$	Tonnes/year	1.47
$B_{y,\text{saving}, 2 \text{ Pot},2018}$	Tonnes/year	1.48
$\text{Stove}_{\text{year}}$	fraction	0.030
$\mu_{y,1 \text{ Pot}}$	fraction	1.00
$\mu_{y,2 \text{ Pot}}$	fraction	1.00
$N_{y,1 \text{ Pot},2018,\text{operational}}$	Number	10808
$N_{y,2 \text{ Pot},2018,\text{operational}}$	Number	39967
ER_y	tCO ₂	2338
Emission Reduction (ER)	tCO₂e	2,338

F.2. Calculation of project emissions or actual net removals

>>

N/A

F.3. Calculation of leakage emissions

>>

N/A

F.4. Calculation of emission reductions or net anthropogenic removals

CPA UNFCCC reference number	Baseline GHG emissions or baseline net GHG removals (t CO ₂ e)	Project GHG emissions or actual net GHG removals (t CO ₂ e)	Leakage GHG emissions (t CO ₂ e)	GHG emission reductions or net anthropogenic GHG removals (t CO ₂ e)		
				Before 01/01/2013	From 01/01/2013	Total amount
10431-0001	2,338	0	0	0	2,338	2,338
Total	2,338	0	0	0	2,338	2,338

F.5. Comparison of emission reductions or net anthropogenic removals achieved with estimates in the included CPA-DDs

CPA UNFCCC reference number	Amount achieved during this monitoring period (t CO ₂ e)	Amount estimated ex ante (t CO ₂ e)
10431-0001	2,338	45,963
Total	2,338	45,963

F.6. Remarks on increase in achieved emission reductions

>>

There is no increase in the GHG emission reductions or net GHG removals by sinks achieved by the specific-case CPA(s) during this monitoring period.

Appendix 1: Contact information (Additional)

Entity responsible for completing the CDM-MR-FORM	
Organization name	Climate-Secure Services
Street/P.O. Box	Club Road
Building	Pragati Apartments
City	West Delhi
State/Region	Delhi
Postcode	110063
Country	India
E-mail	info@climate-secure.com
Website	www.climate-secure.com
Contact Person	Rohit Lohia

- - - - -

Document information

Version	Date	Description
02.0	7 June 2017	Revision to: <ul style="list-style-type: none"> Ensure consistency with version 01.0 of the “CDM project standard for programmes of activities (CDM-EB93-A07-STAN); Make editorial improvements.
01.0	1 April 2015	Initial publication.
Decision Class: Regulatory Document Type: Form Business Function: Issuance Keywords: monitoring report, programme of activities		