



Monitoring report form
(Version 05.1)

Complete this form in accordance with the Attachment "Instructions for filling out the monitoring report form" at the end of this form.

MONITORING REPORT

Title of the project activity	Omnia N ₂ O Abatement Project II	
UNFCCC reference number of the project activity	6083	
Version number of the monitoring report	01	
Completion date of the monitoring report	16/06/2016	
Monitoring period number and duration of this monitoring period	Monitoring Period 4 01/08/2015 – 31/05/2016 Duration (305 days)	
Project participant(s)	Omnia Fertilizer, Division of Omnia Group (Pty) Ltd.	
Host Party	South Africa	
Sectoral scope(s)	Sectoral Scope: 05	
Selected methodology(ies)	Applied Methodology: ACM0019 v01.0.0.	
Selected standardized baseline(s)	Not applicable	
Estimated amount of GHG emission reductions or net GHG removals by sinks for this monitoring period in the registered PDD	327,845	
Total amount of GHG emission reductions or net GHG removals by sinks achieved in this monitoring period	GHG emission reductions or net GHG removals by sinks reported up to 31 December 2012	GHG emission reductions or net GHG removals by sinks reported from 1 January 2013 onwards
	0	221,749

SECTION A. Description of project activity

A.1. Purpose and general description of project activity

>>

a) The increasing demand for fertilizer in South Africa induces the development of new and additional facilities related to fertilizer manufacturing. Omnia Fertilizer, a division of Omnia Group (Pty) Ltd. (hereafter "Omnia") is a leading Nitrogen Fertilizer producer in South Africa. Omnia operates two nitric acid plants in Sasolburg, South Africa. The second nitric acid plant was commissioned second quarter 2012, designed by Uhde GmbH with a confirmed production capacity of 400,000 ton 100% concentrated nitric acid per year. The CDM project at this second plant was registered as "Omnia N₂O Abatement Project II".

Nitrous Oxide (N₂O) is an undesired by-product of the nitric acid (HNO₃) production process at the synthetic fertilizer production facility. However, N₂O emissions from nitric acid production are not regulated in South Africa. No N₂O abatement system was designed into the plant. Without the incentive of the proposed CDM project activity, approx. 800,000 tCO₂e per year¹ would be emitted at Omnia Nitric Acid Plant II. Therefore the baseline scenario without the CDM project would be the operation of the nitric acid plant without N₂O reduction catalyst.

The aim of the project activity is to reduce N₂O emissions in the tail gas by installing a tertiary catalyst after the absorption unit. It is expected that the N₂O abatement catalyst reduces 98 % of the N₂O². Against the standardized baseline emissions factor the project would generate an estimated 3,481,376 t CO₂e emission reductions during a 10 year crediting period.

b) The N₂O abatement system consists of a tertiary N₂O catalyst unit, which is installed downstream of the HNO₃ absorber and before the tail gas turbine. It was designed and constructed by Uhde (Germany) and is called the EnviNoxTM system. The tertiary catalyst consists of an additional catalysts containment facility that was erected at the plant.

c) Relevant Dates for the Project Activity

Date	Event
14/09/2009	Basic Engineering Nitric Acid Plant
09/03/2010	Detailed engineering Design Nitric Acid Plant
04/06/2011	Approval of ACM0019 by UNFCCC
18/07/2011	Change Order UHDE from De-NOx to EnviNox TM
31/03/2012	Commission Nitric Acid Plant
31/03/2012	Commission Project
30/04/2012	Project registered at UNFCCC
30/04/2012	Start Crediting period
30/04/2012 – 30/11/2012	1 st Monitoring period – status: issued
01/12/2012 – 31/05/2014	2 nd Monitoring period – status: issued
01/06/2014 – 31/07/2015	3 rd Monitoring period – status: Issuance requested
01/08/2015 – 31/05/2016	4 th Monitoring period – this Monitoring period

d) The total emission reductions achieved in this monitoring period **221,749** tCO₂e.

A.2. Location of project activity

>>

- a) Host Party: Republic of South Africa
- b) Free State Province, Sasolburg, Metsimaholo Municipality

¹ An estimated business-as-usual emissions factor of 6.45kgN₂O/tHNO₃ (Average Baseline Emission factor of the first 5 monitoring periods of the first N₂O abatement project at Omnia's existing nitric acid plant) and annual confirmed capacity of 400,000tHNO₃/year was taken into account.

² While the calculations are based on this conservative assumption it should be noted that from experience from Omnia's first N₂O reduction project as well as from other similar projects with the same technology even higher abatement efficiencies of up to 99.9 % were observed.

- c) Omnia's plant is located at latitude of approximately 26°48'48" South and a longitude of 27°51'23" East.

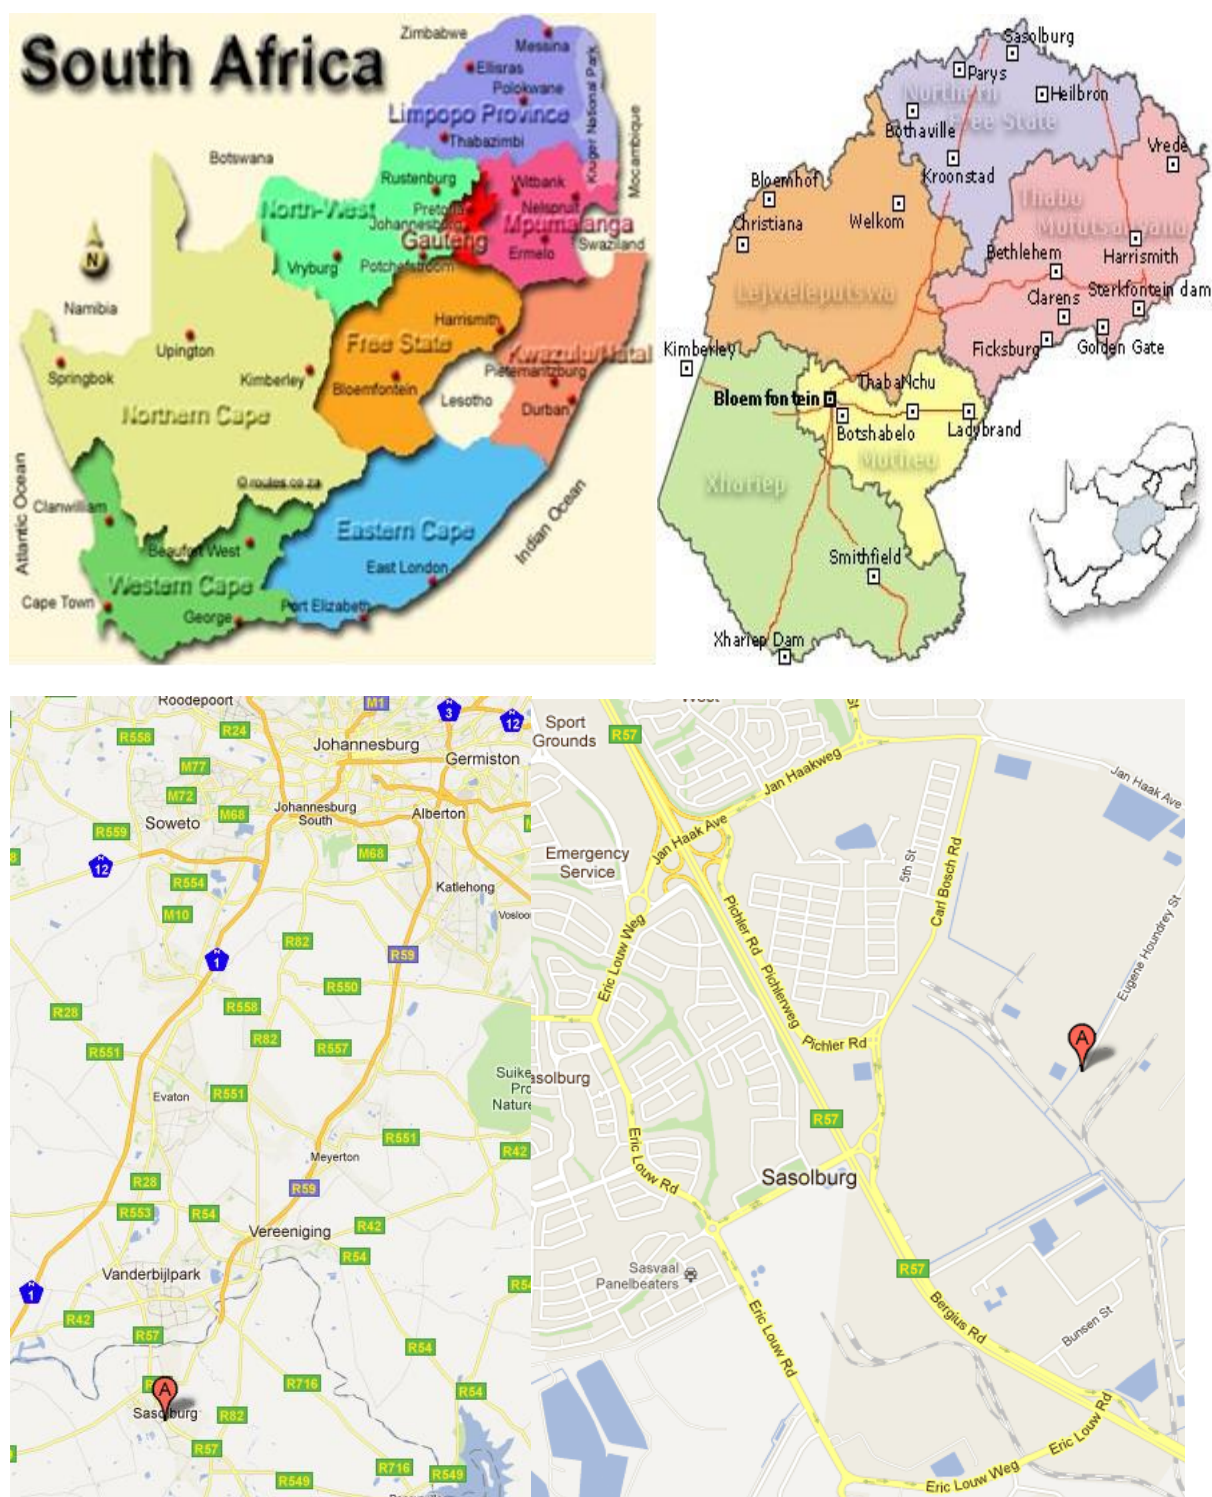


Figure 1: Physical location of the Omnia II nitric acid plant in Sasolburg, South Africa

A.3. Parties and project participant(s)

Party involved ((host) indicates a host Party)	Private and/or public entity(ies) project participants (as applicable)	Indicate whether the Party involved wishes to be considered as project participant (yes/no)
--	--	--

Party involved (host) indicates a host Party)	Private and/or public entity(ies) project participants (as applicable)	Indicate whether the Party involved wishes to be considered as project participant (yes/no)
South Africa (host)	Omnia Fertilizer, Division of Omnia Group (Pty) Ltd.	No
Norway	Nordic Environment Finance Corporation	No

A.4. Reference of applied methodology and standardized baseline

>>

1. (a) Applied methodology: ACM0019 Version 01.0.0: "N₂O abatement from nitric acid production"

(b) Applied tools:

i. "Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion" (Version 02)

ii. "Tool to determine the mass flow of a greenhouse gas in a gaseous stream" (Version 02.0.0)

A.5. Crediting period of project activity

>>

(a) Type of Crediting Period: Non-renewable 10 years and 0 months

(b) Start date of Crediting Period: 30/04/2012

(c) Start of this Monitoring Period: 01/08/2015

(d) End date of this Monitoring Period: 31/05/2016

(e) Length of this Monitoring Period: 305 days

A.6. Contact information of responsible persons/entities

>>

See table in annex 1

SECTION B. Implementation of project activity

B.1. Description of implemented registered project activity

>>

a) The project activity entails the installation of:

- Tertiary N₂O abatement technology,
- Specialized monitoring equipment that is installed at the tail gas stream after the abatement of N₂O emissions (see Monitoring Plan in this PDD for further information).


Catalyst Technology

In the production process of nitric acid (HNO₃), NO₂ is produced as an intermediate material from ammonia (NH₃). The associated chemical reactions of oxidizing ammonia and simultaneous unwanted reactions are as follows:

- | | | | | |
|----|--------------------------------------|---|---|--|
| 1. | NH ₃ + 2 O ₂ | → | HNO ₃ + H ₂ O | (overall desirable reaction) |
| 2. | 4 NH ₃ + 5 O ₂ | → | 4 NO + 6 H ₂ O | (desirable in the NH ₃ oxidization process) |
| 3. | 2NO + O ₂ | → | 2 NO ₂ | (desirable in the NO oxidization process) |
| 4. | 3 NO ₂ + H ₂ O | → | 2 HNO ₃ + NO | (desirable in the NO ₂ absorption process) |
| 5. | 4 NH ₃ + 3 O ₂ | → | 2 N ₂ + 6 H ₂ O | (undesirable) |
| 6. | 4 NH ₃ + 4 O ₂ | → | 2 N ₂ O + 6 H ₂ O | (undesirable) |
| 7. | 2 NH ₃ + 8 NO | → | 5 N ₂ O + 3 H ₂ O | (undesirable) |

Through the sixth and seventh reactions, some N_2O is generated in the process.

The N_2O abatement technology is installed in the tail gas downstream after the HNO_3 absorber and before the tail gas turbine. A tertiary catalyst reduces N_2O that is formed in the primary ammonia oxidation reaction. A wide range of metals (e.g. Cu, Fe, Mn, Co and Ni) have been shown to be of varied efficiency in N_2O abatement catalysts. The abatement efficiency of this pelleted catalyst has been shown to be up to 99.9% in the following reaction³:



In the tertiary abatement system N_2O is removed by catalytic reduction with a hydrocarbon, such as methane from natural gas.

The applied technology is chosen because it has negligible risk of decreasing HNO_3 production and a high expected N_2O reduction.

The expected lifetime of the N_2O reduction unit is at least 10 years. It is expected to be in the range of 25 years. However the installed catalyst itself may need to be replaced after a few years, depending on the achieved abatement performance.

In addition NO_x is reduced in a separate catalyst bed by reduction with ammonia.

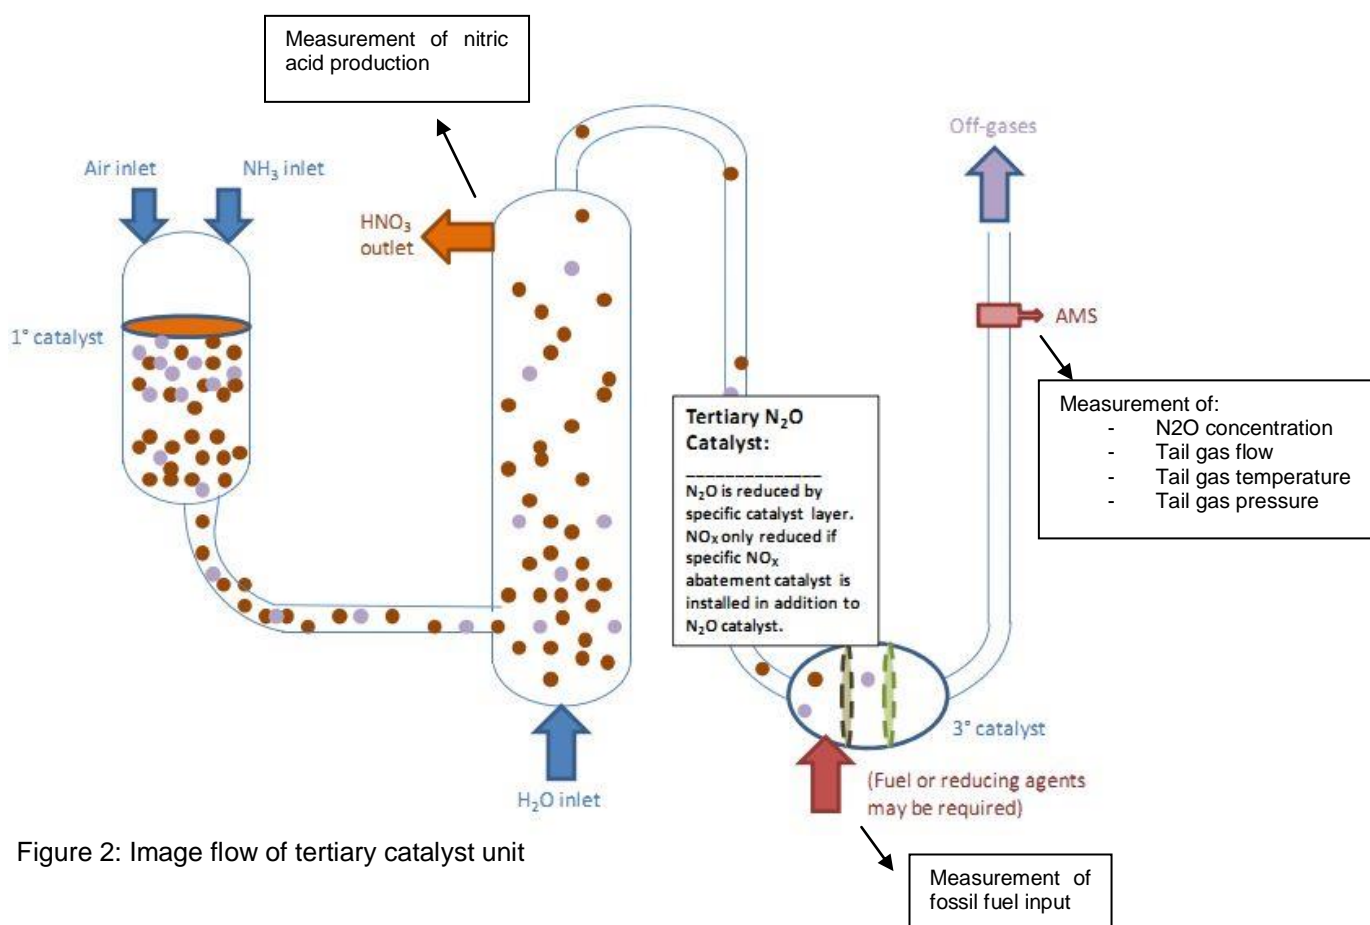


Figure 2: Image flow of tertiary catalyst unit

b) Events or situations of plant downtime during this monitoring period

³ While the calculations of estimated emission reductions are based on the conservative estimation of an abatement efficiency of 98 %, it should be noted that from experience from Omnia's first N_2O reduction project as well as from other similar projects with the same technology even higher abatement efficiencies of up to 99.9 % were observed.

Begin of downtime	End of downtime	Time duration (hours)	reason
15/08/2015 11:00	15/08/2015 21:00	11	Triveni tripped, causing plant to trip
27/08/2015 14:00	28/08/2015 09:00	20	Steam drum level indication faulty
01/09/2015 16:00	11/09/2015 09:00	234	Gauze change
04/10/2015 18:00	05/10/2015 10:00	17	Steam drum level indication faulty
15/10/2015 18:00	19/10/2015 06:00	85	DP across ammonia gas filter to high
21/10/2015 17:00	25/10/2015 06:00	86	High ratio spike
25/10/2015 13:00	26/10/2015 00:00	12	Power outage ex Escom
28/10/2015 00:00	28/10/2015 10:00	11	Power outage ex Escom
03/11/2015 01:00	03/11/2015 12:00	12	PV 95019 lost signal, loose connection, LP Steam
23/12/2015 15:00	05/01/2016 01:00	299	Stop plant due to low production demand
22/01/2016 09:00	23/01/2016 02:00	18	Plant trip due to export of steam, losing steam drum pressure
13/03/2016 10:00	19/03/2016 03:00	138	Power shutdown and site steam shutdown
15/04/2016 12:00	16/04/2016 02:00	15	Triveni tripped, causing plant to trip
18/04/2016 06:00	19/04/2016 00:00	19	Triveni tripped, causing plant to trip
16/05/2016 09:00	20/05/2016 15:00	103	Power outage ex Escom
21/05/2016 18:00	01/06/2016 00:00	247	Triveni tripped, causing plant to trip, air compressor failure

During 162 hours of the monitoring period the N₂O analyser was out of operation or in maintenance for more than 1/3 of an hour. The results were replaced by the maximum value that was recorded during the monitoring period.

c) Description of:

i. Events or situations that may have impacted the applicability of the applied methodology:
None

ii. The following describes how these events or situations have been addressed:
N/A

B.2. Post-registration changes

B.2.1. Temporary deviations from registered monitoring plan, applied methodology or applied standardized baseline

>>
No

B.2.2. Corrections

>>
No

B.2.3. Changes to start date of crediting period

>>
No

B.2.4. Inclusion of a monitoring plan to the registered PDD that was not included at registration

>>

No

B.2.5. Permanent changes from registered monitoring plan, applied methodology or applied standardized baseline

>>

No

B.2.6. Changes to project design of registered project activity

>>

No

B.2.7. Types of changes specific to afforestation or reforestation project activity

>>

Not Applicable

SECTION C. Description of monitoring system

>>

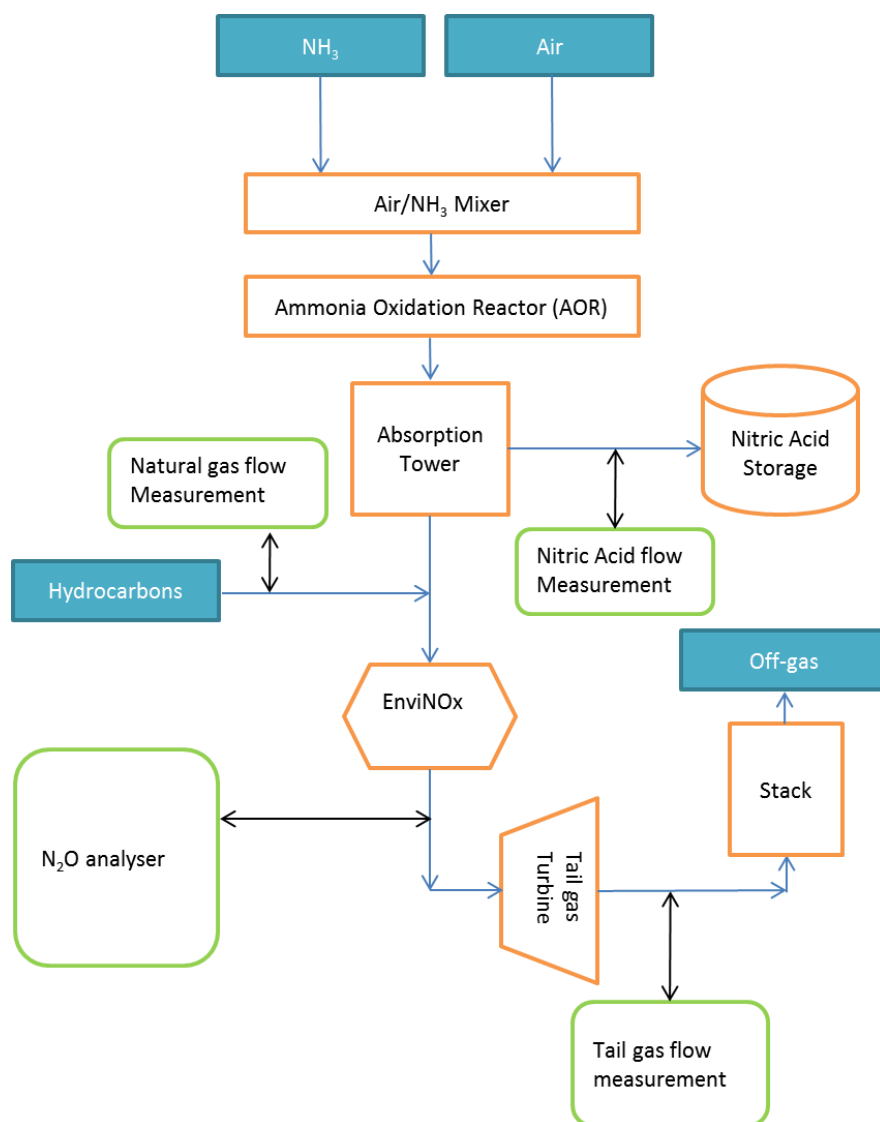


Figure 3: Schematic diagram of location of sample points

Sample points

The sample points were chosen in accordance with the AMS requirements, EN 14181:2004 requirements and the plant design specifications to allow an optimum of data collecting quality.

The location of the sample point was selected to provide ease of access and a location close to the analyser. The most suitable position is in the horizontal section of the exit stack. At this point, the gas is still hot and well mixed. The graph above shows the location of the sample point schematically.

Analyser

The Emerson NGA 2000 is capable of analysing N₂O concentration in gas mixtures. The continuous NDIR industrial photometer can selectively measure concentrations of up to four sample components. In this case it is equipped for the measurement of N₂O and NO. The analyser features gas-filled opto-pneumatic detectors. The detector provides optimum sensitivity and high selectivity compared with the other gas components in the sample. The Analyser is QAL1 tested according to EN 14181:2004 for the measurement of N₂O.

Sample Conditioning System

The gas sample is extracted at the sampling point particles are removed with a heated filter unit and the clean sampling gas is delivered through a heated sampling line to the analyser cabinet. Before being fed to the analyser, traces of moisture are removed by a sample conditioning system that is installed in the analyser cabinet. The minimum flow rate to the analyser is controlled and connected to an alarm.

Stack gas flow meter

The Durag annubar measuring system D-FL 100 operates according to the differential pressure principle. The probe has two separate chambers, between which the flow builds up a differential pressure. Taking into account the other flow parameters such as, e.g. absolute pressure and temperature, the volume flow is converted from operating to standard conditions. This calculation is performed in the DURAG data system D-EMS 2000. The D-FL 100 is QAL1 tested according to EN 14181:2004 (see below).

Accuracy and Calibration of Instruments

All meters are maintained to ensure a high level of accuracy. The exact specifications of each meter have been included in procedures to maintain those levels of accuracy. These procedures can be found for each parameter in section D.2.

ACM0019 requires all key meters to be subject to a quality control regime that will include regular maintenance and calibration. For the N₂O and stack gas flow analyzer this includes the application of the European Norm EN 14181. A record is being maintained showing the location and unique identification number of each meter, the calibration status of that meter (when last calibrated, when next due for calibration).

Monitoring equipment (Tag-No./Description)	Serial Number	Description; Related monitoring parameter as per applicable registered monitoring plan	Type	Accuracy or accuracy class	Calibration frequency	Calibrations
FIC-95060	Transmitter: 3816752 Sensor: 1425 7727	Natural gas flow meter FC_{i,j,n}	Micro Motion Coriolis Massflow	+/- 0.5 % of the adjusted range	Annually	24/03/2015 07/09/2015 31/05/2016
DY-95023	Transmitter: 3811087 Sensor: 1420 6070	Nitric acid flow meter P_{NA,n}	Micro Motion Coriolis Massflow	+/- 0.2 % of the adjusted range	Annually	24/03/2015 07/09/2015 31/05/2016
AI-95005	9910103055 428	N ₂ O Outlet Analyser V_{i,t,db}	Emerson NGA 2000	QAL1: +/- 1.6 % QAL 2: +/- 1.7 %.	QAL3 done automatically, zero every day, span every second day. AST done every year and QAL2 every 5 years.	QAL2/AST: 26/05/2015 - 29/05/2015
FT-95015	9084944	Stackgas volume flow meter V_{t,wb}	Durag Annubar measuring system D-FL 100	QAL1: +/- 2.23 % QAL 2: +/- 2.51 %.	AST done every year and QAL2 every 5 years	QAL2/AST: 26/05/2015 - 29/05/2015
PT 95043	9084942	Stackgas pressure measurement P_t	Durag Annubar measuring system D-FL 100	QAL1: not specified QAL 2: +/- 0.74 %.	AST done every year and QAL2 every 5 years	QAL2/AST: 26/05/2015 - 29/05/2015
TT 95075	02389948/4 9490828	Stackgas temperature measurement T_t	Durag Annubar measuring system D-FL 100	QAL1: not specified QAL 2: +/- 0.84 %.	AST done every year and QAL2 every 5 years	QAL2/AST: 26/05/2015 - 29/05/2015

In the following, it is described how the procedures given in EN 14181 for QAL1-3 have been applied at the plant.

QAL1

In accordance with EN 14181:2004, the monitoring system for N₂O concentration measurements are suitable for the measuring task (parameter and composition of the flue gas) by use of the QAL1 procedure as specified by EN ISO 15267 or equivalent standards. This standard's objective proves that the total

uncertainty of the results obtained from the AMS meets the specification for uncertainty stated in the applicable regulations. Such suitability testing was carried out under specific conditions by an independent third-party on a specific testing site.

QAL2

QAL2 is a procedure for the determination of the calibration function and its variability. According to EN 14181:2004, the QAL2 test including the SRM is conducted by an independent testing house which is accredited to EN ISO/IEC 17025. The QAL2 tests are performed on suitable AMS that is correctly installed and commissioned on-site (as opposed to QAL1 which is conducted off-site).

A calibration function was established from the results of a number of parallel measurements performed with a Standard Reference Method (SRM). The variability of the measured values obtained with the AMS was then evaluated by the independent qualified "testing house".

QAL2 tests are performed at least every 5 years according to EN 14181:2004.

QAL2 test was done by TÜV SÜD Industrie Service GmbH.

AST

In addition, Annual Surveillance Tests (AST) were conducted in accordance with EN 14181:2004 and EN 14181:2014; these are a series of measurements with independent measurement equipment in parallel to the existing AMS. The AST tests were performed annually. If a full QAL2 test was performed (at least every 5 years), an additional AST test is not necessary in that same year.

AST was done by TÜV SÜD Industrie Service GmbH.

QAL3

QAL3 describes the on-going quality assurance and maintenance procedures and documentation for the AMS conducted by the plant operator. With this documentation it was demonstrated that the AMS was in control during its operation so that it continues to function within the required specifications.

In essence, the instrumentation personnel performed QAL3 procedures through the established calibration procedures as outlined for the applicable parameter in section D.2.

N₂O-Analyser Zero Calibration

Nitrogen gas was used as reference gas for zero calibration. The zero calibration was conducted automatically every 24 hours.

N₂O-Analyser Span calibration

Span calibrations were performed every second day by means of a certified calibration gas and were automatically triggered. Manual initiation of the span calibration can also be performed if required. The calibration results and subsequent actions were all documented as part of the CDM procedure. In addition, the analyser room and equipment was visually inspected on a regular basis.

Flow meter calibration procedures

The flow meter itself does not need to be calibrated since it is a physical device which does not have drift. Therefore, it was sufficient to regularly inspect its physical condition by means of visual and electric checks of the probe. It was cleaned if deemed necessary. In addition the flow meter was checked during the QAL2 and AST tests by an independent laboratory by comparison to a standard reference method (SRM) as stated above.

Organization Structure with Management & Operation Process

As an operator of nitric acid plants since many years, the plant's staff in general and its instrument department in particular have been accustomed to operating technical equipment adhering to high quality standards.

Omnia has trained the staff selected for the operation of the relevant monitoring systems and ensures that the operational standards required for the appropriate handling of the equipment is maintained throughout the crediting period. Measuring instruments were calibrated by the instrumentation engineer in accordance with the requirements of the instrument suppliers. The operations and equipment engineers of the nitric acid plant are responsible for the daily operation and maintenance of the systems.

The monitoring of the parameters for the determination of the mass flow of the N₂O was the responsibility of the operational personal. All relevant data was recorded automatically and stored on electronic media.

Data Processing

Archiving of data

In accordance with the PDD, all of the data collected for the project activity was stored in electronic format for the duration of the crediting period + 2 years. To meet these criteria, Omnia provides an extensive data

storage system covering both the raw data received by the Delta V DCS as well as the output reports from the Durag system and drives and the main server as follows:

- All data collected by the Delta V DCS is stored on its internal hard drive for 1 month.
- The EnviNoxTM data is stored on the plant Durag system and is designed to carry the full crediting + 2 years. This system comprises of two hard disc drives, as a backup to the process.
- The Envinox TM data on the server is also backed up to an external USB HDD which is kept at the instrumentation departement and also retained there for the duration of the crediting period + 2 years.

Audit function and management review

The Project Manager arranged for internal audits of the management system once per year. The auditor is involved in the daily operation of the plant and if necessary, may be sourced from a third party. The auditor assessed the implementation of the monitoring procedure, quality assurance steps and data collection and archiving. Audit findings, and steps taken to address findings were recorded and reviewed in a Management Review meeting (convened at least annually) at which time the effectiveness of these procedures are reviewed and necessary changes implemented.

SECTION D. Data and parameters

D.1. Data and parameters fixed ex ante or at renewal of crediting period

(Copy this table for each piece of data and parameter)

Data / Parameter:	EF _{default,y}																																						
Unit:	kgN ₂ O/tHNO ₃																																						
Description:	Default N ₂ O baseline emissions factor in the calendar year y of the monitoring period n																																						
Source of data:	<p>According to ACM0019 Version 01.0.0, the default N₂O baseline emission factor will vary every year. In year 2005, the emission factor will be 5.1 and then it will decrease every year until it reaches a final value of 2.5 in the year 2020. The value of 2.5 will remain constant after 2020, as provided in the following table:</p> <table border="1"> <thead> <tr> <th>Year</th><th>Emissions factor (kgN₂O/tHNO₃)</th></tr> </thead> <tbody> <tr><td>2005</td><td>5.10</td></tr> <tr><td>2006</td><td>4.90</td></tr> <tr><td>2007</td><td>4.70</td></tr> <tr><td>2008</td><td>4.60</td></tr> <tr><td>2009</td><td>4.40</td></tr> <tr><td>2010</td><td>4.20</td></tr> <tr><td>2011</td><td>4.10</td></tr> <tr><td>2012</td><td>3.90</td></tr> <tr><td>2013</td><td>3.70</td></tr> <tr><td>2014</td><td>3.50</td></tr> <tr><td>2015</td><td>3.40</td></tr> <tr><td>2016</td><td>3.20</td></tr> <tr><td>2017</td><td>3.00</td></tr> <tr><td>2018</td><td>2.80</td></tr> <tr><td>2019</td><td>2.70</td></tr> <tr><td>2020</td><td>2.50</td></tr> <tr><td>2021</td><td>2.50</td></tr> <tr><td>Year n</td><td>2.50</td></tr> </tbody> </table>	Year	Emissions factor (kgN ₂ O/tHNO ₃)	2005	5.10	2006	4.90	2007	4.70	2008	4.60	2009	4.40	2010	4.20	2011	4.10	2012	3.90	2013	3.70	2014	3.50	2015	3.40	2016	3.20	2017	3.00	2018	2.80	2019	2.70	2020	2.50	2021	2.50	Year n	2.50
Year	Emissions factor (kgN ₂ O/tHNO ₃)																																						
2005	5.10																																						
2006	4.90																																						
2007	4.70																																						
2008	4.60																																						
2009	4.40																																						
2010	4.20																																						
2011	4.10																																						
2012	3.90																																						
2013	3.70																																						
2014	3.50																																						
2015	3.40																																						
2016	3.20																																						
2017	3.00																																						
2018	2.80																																						
2019	2.70																																						
2020	2.50																																						
2021	2.50																																						
Year n	2.50																																						
Value(s) applied:	2015: 3.40 2016: 3.20																																						
Choice of data or measurement methods and procedures	Default value																																						

Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	The decrease in the value for the baseline emission factor over time is to reflect the technological development. Please note that the factual business as usual emissions are estimated to be 6.45 kgN₂O/tHNO₃.

Data / Parameter:	GWP_{N_2O}
Unit:	tCO ₂ e/tN ₂ O
Description:	Global warming potential of the nitrous oxide
Source of data:	Relevant decisions by the CMP
Value(s) applied:	298
Choice of data or measurement methods and procedures	Default value
Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	-

Data / Parameter:	R_u
Unit:	Pa,m ³ /kmol.K
Description:	Universal ideal gas constant
Source of data:	"Tool to determine the mass flow of a greenhouse gas in a gaseous stream" (Version 02.0.0)
Value(s) applied:	8,314
Choice of data or measurement methods and procedures	Default value
Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	-

Data / Parameter:	MM_i
Unit:	kg/mol
Description:	Molecular mass of greenhouse gas i (N ₂ O)
Source of data:	"Tool to determine the mass flow of a greenhouse gas in a gaseous stream" (Version 02.0.0)
Value(s) applied:	44.02
Choice of data or measurement methods and procedures	Default value
Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	-

Data / Parameter:	P_n
Unit:	Pa
Description:	Total pressure at normal conditions
Source of data:	"Tool to determine the mass flow of a greenhouse gas in a gaseous stream" (Version 02.0.0)
Value(s) applied:	101,325
Choice of data or measurement methods and procedures	Default value

Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	-

Data / Parameter:	T_n
Unit:	K
Description:	Temperature at normal conditions
Source of data:	"Tool to determine the mass flow of a greenhouse gas in a gaseous stream" (Version 02.0.0)
Value(s) applied:	273.15
Choice of data or measurement methods and procedures	Default value
Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	-

Data / Parameter:	$T_{open,n}$
Unit:	%
Description:	Fraction of time in monitoring period n during which the by-pass valve on the line feeding the tertiary N_2O abatement facility was open to vent the gas directly to the atmosphere.
Source of data:	ACM0019 v.01.0.0
Value(s) applied:	0
Choice of data or measurement methods and procedures	Default value
Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	No by-pass is foreseen in the project design and therefore no by-pass valve will be installed from the beginning of the project activity. If necessary, plant will shut down.

D.2. Data and parameters monitored

(Copy this table for each piece of data and parameter)

Data / Parameter:	$P_{NA,n}$
Unit:	tHNO ₃
Description:	Nitric Acid Produced
Measured/ Calculated / Default:	Measured and Calculated
Source of data:	The mass flow of HNO ₃ is continuously measured by a mass flow meter. HNO ₃ concentration is calculated on the DCS using density and temperature from DCS. The mass flow is then multiplied by the concentration to calculate the 100% HNO ₃ mass flow. Density & acid concentration are crosschecked by laboratory analysis.

Value(s) of monitored parameter:	235,779
Monitoring equipment:	TAG number/ model specification of meter: DY 95023/ Micro Motion, Mass flow Refer to Calibration frequency table Density & acid concentration are crosschecked by laboratory analysis.
Measuring/ Reading/ Recording frequency:	HNO ₃ : Mass flow and concentration Continuously at 1 second intervals. Density & concentration analysis for crosschecks: approximately 12 samples per day are collected, which is sent to the plant laboratory for analysis. Another sample is taken daily to the central laboratory for analysis. This is for cross reference purposes.
Calculation method (if applicable):	Mass flow measurements (kg/h) are multiplied with acid concentration determined on the DCS to calculate $P_{NA,n}$ mass flow in tHNO ₃ /h. This method of calculation is used instead of manual inputs of lab data into the DCS to prevent finger mistakes and is also done on a continuous basis at 1 second intervals.
QA/QC procedures:	Maintenance and calibration of the flow meter and density meter has been applied under the internal QA/QC procedures implemented for this project activity. Omnia is accredited with ISO9001, ISO 14001 and OHS 18001. All plant equipment and piping are designed as per ASME standards and their maintenance/QAQC is based on relevant API standards, vendor recommendations and prevailing practices in fertilizer industry. Refer to Section C for calibration frequency tables.
Purpose of data:	Calculation of Baseline emissions or baseline net GHG removal by sinks
Additional comment:	-

Data / Parameter:	$F_{N_2O, Tailgas, h}$
Unit:	kgN ₂ O/h
Description:	Mass Flow of N ₂ O in the gaseous stream of the tail gas in hours h
Measured/ Calculated / Default:	Measured and Calculated
Source of data:	N ₂ O concentration: Emerson N ₂ O Analyzer Stack gas volume flow: Durag Annubar D-FL 100 flow meter
Value(s) of monitored parameter:	Average value for this monitoring period: 5.0337 Applied for the determination of $Q_{N_2O, tailgas, n}$ and overall Project Emissions. See calculation sheet and sample calculation of section E.2.
Monitoring equipment:	N ₂ O concentration: Emerson N ₂ O Analyzer Stack gas volume flow: Durag Annubar D-FL 100 flow meter
Measuring/ Reading/ Recording frequency:	Continuously / 1 second

Calculation method (if applicable):	<ul style="list-style-type: none"> The monitoring system provides separate hourly average values for the N₂O concentration and the volume or mass flow of the tail gas based on 1 second interval readings that are recorded and stored electronically. These N₂O data sets are identified by means of a unique time / date key indicating when exactly the values were observed; The correction factors derived from the calibration curve of the QAL2 audit for the monitoring components as determined during the QAL2-test in accordance with EN 14181 must be applied to both the N₂O concentration and the volume or mass flow of the tail gas. The QAL 2 calibration factors are applied in the data storage system at the plant. If the data for either the N₂O concentration or the volume or mass flow of the tail gas is not available for more than 1/3 of any hour while the plant was in operation, the value for that hour shall be replaced with the maximum value of N₂O concentration or volume or mass flow of the tail gas observed during the monitoring period. If data for neither the N₂O concentration nor the volume or mass flow of the tail gas are available for more than 1/3 of any hour while the plant was in operation, the maximum value of mass flow of N₂O calculated during the monitoring period shall be applied to any such hour. Values observed during five operating hours before and after a plant start-up and shut-down shall not be used for the determination of the maximum values. The hourly values are then aggregated as follows: $Q_{N2O, tailgas, n} = \sum_{h=1}^{h_n} F_{N2O, tailgas, h} * 10^{-3}$ <p> $Q_{N2O, tailgas, n}$ = Amount of N₂O released through the tail gas of the project plant to the atmosphere in monitoring period n (tN₂O) $F_{N2O, tailgas, h}$ = Mass flow of N₂O in the gaseous stream of the tail gas in the hour h (kgN₂O/h) h_n = Number of hours in monitoring period n during which the plant was in operation </p>
QA/QC procedures:	<p>As per EN 14181:2004 and EN 14181:2014 standards, the flow meter and the analyser was tested and calibrated by an external laboratory with EN ISO IEC 17025 Accreditation. The QAL2 test is conducted once every 5 years; the AST test is conducted once per year. Every 5 years the AST test is part of the QAL2 test.</p> <p>QAL2 & 3 calibration schedules are performed according to plant internal procedures Refer to QAL 2 and AST tables in Section C.</p>
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	

Data / Parameter:	h_n
Unit:	Hours
Description:	Number of hours in monitoring period n the plant was in operation
Measured/ Calculated / Default:	Measured
Source of data:	Omnia production log and continuous monitoring according to operational parameters
Value(s) of monitored parameter:	5,993

Monitoring equipment:	The total operating hours are logged continuously in the production log
Measuring/ Reading/ Recording frequency:	Continuously/ 1 second
Calculation method (if applicable):	-
QA/QC procedures:	-
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	-

Data / Parameter:	$T_{open,n}$
Unit:	%
Description:	Fraction of time in monitoring period n during which the by-pass valve on the line feeding the tertiary N_2O abatement facility was open to vent the gas directly to the atmosphere.
Measured/ Calculated / Default:	Measured
Source of data:	N/A
Value(s) of monitored parameter:	0
Monitoring equipment:	N/A
Measuring/ Reading/ Recording frequency:	N/A
Calculation method (if applicable):	N/A
QA/QC procedures:	N/A
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	No by-pass is foreseen in the project design and therefore no by-pass valve will be installed from the beginning of the project activity.

Data / Parameter:	$PE_{FF,n}$
Unit:	tCO ₂ e
Description:	Project emissions related to fossil fuel input to the destruction facility and/or re-heater in monitoring period n (tCO ₂)
Measured/ Calculated / Default:	Calculated
Source of data:	The emissions related to the operation of the N_2O destruction facility include only on-site emissions due to fossil fuel use as input to the N_2O destruction facility. Natural gas consumption will be measured by a mass-flow meter
Value(s) of monitored parameter:	891.99

Monitoring equipment:	-
Measuring/ Reading/ Recording frequency:	Continuously/ 1 second
Calculation method (if applicable):	<p>Calculated based on measurement of natural gas consumption according to the following formula, as provided in the applicable tool "Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion" (Version 02):</p> <p>2) $PE_{FF,n} = PE_{FC,i,j}$</p> <p>3) $PE_{FC,j,n} = \sum_i FC_{i,j,n} * COEF_{i,n}$</p> <p style="text-align: center;">$COEF_{i,n} = W_{c,i,n} * 44/12$</p> <p>Where:</p> <p>$PE_{FC,j,n}$ = CO₂ emissions from fossil fuel combustion in process <i>j</i> in monitoring period <i>n</i> (tCO₂/n)</p> <p>$FC_{i,j,n}$ = Quantity of fuel type <i>i</i> combusted in the process <i>j</i> during the monitoring period <i>n</i> (mass or volume unit/n)</p> <p>$COEF_{i,n}$ = CO₂ emission coefficient of fuel type <i>i</i> in monitoring period <i>n</i> (tCO₂/mass or volume unit)</p> <p><i>i</i> = fuel types combusted in process <i>j</i> during monitoring period <i>n</i></p> <p>$W_{c,i,y}$ = Weighted mass average fraction of carbon in fuel type <i>i</i> in year <i>y</i></p>
QA/QC procedures:	<p>Maintenance and calibration of the mass flow meter is applied under the internal QA/QC procedures.</p> <p>Serial Number SN:14257727 (Sensor) SN: 3816752 (Transmitter)</p> <p>Tag No. FIC-95060</p>
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	Calibration procedures are performed according to plant internal procedure

Data / Parameter:	$W_{c,i,n}$						
Unit:	tC/mass unit of fuel type natural gas						
Description:	Weighted average mass fraction of carbon in fuel type <i>i</i> in year <i>y</i>						
Measured/ Calculated / Default:	Measured						
Source of data:	<p>The following data source may be used if the relevant conditions apply:</p> <table border="1"> <thead> <tr> <th>Data Source</th><th>Conditions for using the data source</th></tr> </thead> <tbody> <tr> <td>a) Values provided by the fuel supplier in invoices</td><td>This is the preferred source</td></tr> <tr> <td>b) Measurements by the project participants</td><td>If a) is not available</td></tr> </tbody> </table> <p>Option a) Not received from Invoices but by request from supplier.</p>	Data Source	Conditions for using the data source	a) Values provided by the fuel supplier in invoices	This is the preferred source	b) Measurements by the project participants	If a) is not available
Data Source	Conditions for using the data source						
a) Values provided by the fuel supplier in invoices	This is the preferred source						
b) Measurements by the project participants	If a) is not available						

Value(s) of monitored parameter:	2015: 0.731 2016: 0.731
Monitoring equipment:	-
Measuring/ Reading/ Recording frequency:	The mass fraction of carbon is obtained by request from supplier.
Calculation method (if applicable):	The mass fraction is calculated by using the composition obtained from the supplier.
QA/QC procedures:	Verify if the values under a) and b) are within the uncertainty range of the IPCC default values as provided in Table 1.2, Vol. 2 of the 2006 IPCC Guidelines. If the values fall below this range collect additional information from the testing laboratory to justify the outcome or conduct additional measurements. The laboratories in b) should have ISO17025 accreditation or justify that they can comply with similar quality standards.
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	None

Data / Parameter:	$FC_{i,j,n}$
Unit:	Mass unit per monitoring period (ton)
Description:	Quantity of fuel type i combusted in process j during the monitoring period n
Measured/ Calculated / Default:	Measured
Source of data:	Measurements from Micro Motion (Rosemount)
Value(s) of monitored parameter:	332.432 t
Monitoring equipment:	Micro motion (Rosemount)
Measuring/ Reading/ Recording frequency:	Continuously/ 1 second
Calculation method (if applicable):	-
QA/QC procedures:	Overall measurement accuracy +/- 0.5% of the adjusted range Serial Number SN:14257727 (Sensor) SN: 3816752 (Transmitter) Tag No. FIC-95060 For calibration information refer to tables in section C.
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	Calibration schedules are performed according to plant internal procedure.

Data / Parameter:	$V_{t,db}$
Unit:	Nm ³ dry gas/h
Description:	Volumetric Flow of the gaseous stream in time interval t on a dry basis
Measured/ Calculated / Default:	Measured

Source of data:	Measurements from Durag Annubar flow meter
Value(s) of monitored parameter:	Average Value: 126,169
Monitoring equipment:	Durag Annubar Flow meter
Measuring/ Reading/ Recording frequency:	Continuously / 1 second
Calculation method (if applicable):	-
QA/QC procedures:	Periodic calibration against a primary device provided by an independent accredited laboratory is mandatory. According to EN 14181, the flow meter will be tested and calibrated by an external laboratory with EN ISO IEC 17025 Accreditation. The QAL2 test is conducted once every 5 years; the AST test is conducted once per year. Every 5 years the AST test is part of the QAL2 test.
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	Calibration schedules are performed according to plant internal procedures As the gaseous stream is assumed to be dry, Option A of the tool "Tool to determine the mass flow of a greenhouse gas in a gaseous stream" is applied. In order to apply this option, it shall be demonstrated that the gaseous stream is dry. As described in part (a) of Option A, the moisture content of the gaseous stream ($C_{H_2O,t,db,n}$) will be measured and it shall be demonstrated that it is less or equal to 0.05 kg H ₂ O/m ³ dry gas. See parameter $C_{H_2O,t,db,n}$ below.

Data / Parameter:	$V_{i,t,db}$
Unit:	m ³ gas i/m ³ dry gas
Description:	Volumetric fraction of greenhouse gas i in a time interval t on a dry basis
Measured/ Calculated / Default:	Continuously
Source of data:	-
Value(s) of monitored parameter:	Average value: 0.00002016
Monitoring equipment:	Emerson N ₂ O Analyser
Measuring/ Reading/ Recording frequency:	Continuously/ 1 second
Calculation method (if applicable):	-
QA/QC procedures:	Calibration includes zero verification with an inert gas (e.g. N ₂) and at least one reading verification with a standard gas (single calibration gas or mixture calibration gas). All calibration gases have a certificate provided by the manufacturer and are under their validity period. Refer to QAL2 test tables in Section C.
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks

Additional comment:	Calibration schedules are performed according to plant internal procedures. The N ₂ O concentration is measured in ppmv ($= 10^6 \text{ m}^3 \text{ N}_2\text{O} / \text{m}^3 \text{ dry gas}$) and automatically converted to mg N ₂ O / Nm ³ dry gas ($= 10^{-6} \text{ kg N}_2\text{O} / \text{Nm}^3 \text{ dry gas}$) by multiplication with the density of N ₂ O within the data storage system at the plant. The QAL 2 calibration factor is also applied in the data storage system at the plant. The results from the data storage system in mg N ₂ O / Nm ³ dry gas are used for further calculation in the data calculation spreadsheet.
---------------------	--

Data / Parameter:	C _{H₂O,t,db,n}
Unit:	kg H ₂ O/m ³ drygas
Description:	Moisture content of the gaseous stream at normal conditions, in time interval <i>t</i>
Measured/ Calculated / Default:	Measured
Source of data:	Measurements according to the USEPA CF42 method 4 – Gravimetric determination of water content
Value(s) of monitored parameter:	2015: 0.0073 2016: 0.0073
Monitoring equipment:	Manual sampling by external laboratory or testing house.
Measuring/ Reading/ Recording frequency:	Annually, Measurements should coincide with the Annual Surveillance Test (associated with requirements of the EN 14181:2004 or EN 14181:2014 standard) or the calibration of the flow meter for the gaseous stream.
Calculation method (if applicable):	-
QA/QC procedures:	According to the USEPA CF42 method 4
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	Required for proving that the gaseous stream is dry.

Data / Parameter:	T _t
Unit:	°C
Description:	Temperature in the gaseous stream in time interval <i>t</i>
Measured/ Calculated / Default:	Measured
Source of data:	Tail Gas temperature measurement
Value(s) of monitored parameter:	Average value: 140.38
Monitoring equipment:	Thermocouples
Measuring/ Reading/ Recording frequency:	Continuously/ 1 second
Calculation method (if applicable):	-
QA/QC procedures:	Periodic calibration against a primary device is provided by an independent accredited laboratory is mandatory. Calibration and frequency of calibration is according to manufacturer's specifications Refer to QAL2 and AST test tables in Section C.
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks

Additional comment:	As parameters are converted to normal conditions during the monitoring process, this parameter is not needed. Calibration schedules are performed according to plant internal procedures
---------------------	---

Data / Parameter:	P_t
Unit:	Pa
Description:	Pressure of the gaseous stream in time interval t
Measured/ Calculated / Default:	Measured
Source of data:	Pressure probe
Value(s) of monitored parameter:	Average value 85,330
Monitoring equipment:	Pressure probe
Measuring/ Reading/ Recording frequency:	Continuously/ 1 second
Calculation method (if applicable):	-
QA/QC procedures:	Periodic calibration against a primary device provided by an independent accredited laboratory is mandatory. Calibration and frequency of calibration is according to manufacturer's specifications. Refer to QAL2 and AST test tables in Section C.
Purpose of data:	Calculation of project emissions or actual net GHG removals by sinks
Additional comment:	As parameters are converted to normal conditions during the monitoring process, this parameter is not needed. Calibration schedules are performed according to plant internal procedures.

Data / Parameter:	ER_n
Unit:	tCO ₂ e
Description:	Emission reduction in monitoring period
Measured/ Calculated / Default:	Calculated
Source of data:	-
Value(s) of monitored parameter:	221,749
Monitoring equipment:	-
Measuring/ Reading/ Recording frequency:	-
Calculation method (if applicable):	4) $ER_n = BE_n - PE_n$
QA/QC procedures:	-
Purpose of data:	Calculation of project emissions or actual net GH removals by sinks
Additional comment:	-

D.3. Implementation of sampling plan

>>

Not applicable

SECTION E. Calculation of emission reductions or GHG removals by sinks

E.1. Calculation of baseline emissions or baseline net GHG removals by sinks

>>

Baseline emissions:

The calculation of the baseline emissions or baseline net GHG removals sinks has been established in accordance with ACM0019 Version 01.0.0. The formulae are numbered according to the according to the numbering in the registered PDD.

$$(1) \quad BE_n = P_{NA,n} * EF_{BL, N_2O,n} * GWP_{N_2O} * 10^{-3}$$

Where:

BE_n = Baseline emissions in monitoring period n (tCO₂e)

$P_{NA,n}$ = Nitric acid produced in the monitoring period n (tHNO₃)

$EF_{BL, N_2O,n}$ = Baseline N₂O emission factor for nitric acid production in the monitoring period n (kgN₂O/tHNO₃).

GWP_{N_2O} = Global Warming Potential of N₂O valid for the commitment period (298 tCO₂e)

Sample calculation applying summed-up values of the whole monitoring period

Year	BE_n	P_{NA}	$EF_{BL, N_2O,n}$	GWP_{N_2O}	
2015	115,457.03	113,952.85	3.40	298	0.001
2016	116,173.75	121,826.50	3.20	298	0.001
Total	231,630.78				

Determination of the baseline N₂O emission factor ($EF_{BL, N_2O,n}$)

The baseline N₂O emission factor in the monitoring period n ($EF_{BL, N_2O,n}$) shall be determined as a default emission factor $EF_{default,y}$ given for each calendar year y for which BE_n is calculated (see monitoring table for $EF_{default,y}$), as follows:

$$(2) \quad EF_{BL, N_2O,n} = EF_{default, y}$$

Where:

$EF_{BL, N_2O,n}$ = Baseline N₂O emission factor for nitric acid production in the monitoring period n (kgN₂O/tHNO₃).

$EF_{default, y}$ = Default N₂O baseline emissions factor in the calendar year of the monitoring period n (kgN₂O/tHNO₃) (see list of $EF_{default, y}$ values under B.6.2).

Year	$EF_{BL, N_2O,n}$	$EF_{default,n}$
2015	3.40	3.40
2016	3.20	3.20

E.2. Calculation of project emissions or actual net GHG removals by sinks

>>

Project emissions include emissions of N₂O which have not been destroyed by the project activity and, in case of the installation of a tertiary N₂O abatement facility, CO₂ emissions resulting from the operation of the N₂O abatement facility.

Project emissions are calculated using the “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion” (Version 02) referred to in ACM0019.

Project emissions are calculated as follows:

$$(3) \quad PE_n = PE_{N_2O,n} + PE_{CO_2,tertiary,n}$$

Where:

PE_n = Project emissions in monitoring period n (tCO₂e)
 $PE_{N_2O,n}$ = Project emissions of N₂O from the project plant in monitoring period n (tCO₂e)
 $PE_{CO_2,tertiary,n}$ = Project emissions of CO₂ from the operation of the tertiary N₂O abatement facility in monitoring period n (tCO₂)

Sample calculation applying summed-up values of the whole monitoring period:

Year	PE_n	$PE_{N_2O,n}$	$PE_{CO_2,tertiary,n}$
2015	4,525.63	4,109.10	416.53
2016	5,355.60	4,880.65	474.95
Total	9,881.23		

The amount of N₂O emissions from the project activity includes two emission sources:

- The N₂O contained in the tail gas stream of the plant which is released to the atmosphere and;
- In the case of a tertiary N₂O abatement, the N₂O contained in any by-pass streams to the tertiary N₂O abatement facility.

$$(4) \quad PE_{N_2O,n} = (Q_{N_2O,tail\ gas,n} + Q_{N_2O,by-pass,n}) * GWP_{N_2O}$$

Where:

$PE_{N_2O,n}$ = Project emissions of N₂O from the project plant in monitoring period (tCO₂e)

$Q_{N_2O,tail\ gas,n}$ = Amount of N₂O released through the tail gas of the project plant to the atmosphere in monitoring period n (tN₂O)

$Q_{N_2O,by-pass,n}$ = Amount of N₂O released through the by-pass to a tertiary N₂O abatement system to the atmosphere in monitoring period n (tN₂O)

GWP_{N_2O} = Global warming potential of N₂O valid for the commitment period (310 tCO₂e)

Sample calculation applying summed-up values of the whole monitoring period:

Year	$PE_{N_2O,n}$	$Q_{N_2O,tail\ gas,n}$	$Q_{N_2O,by-pass,n}$	GWP_{N_2O}
2015	4,109.10	13.79	0	298
2016	4,880.65	16.38	0	298
Total	8,989.75			

The methodology and for keeping up flexibility in the event of a possible by-pass installation at a later point of time the parameter $T_{open,n}$ will be monitored throughout the crediting period and has been added to section B.7.1.

Determination of $Q_{N_2O, tail\ gas, n}$

The amount of N_2O emissions from the tail gas stream of the project plant is determined using the “Tool to determine the mass flow of a greenhouse gas in a gaseous stream.” In applying the tool, the following provisions apply:

- Throughout the crediting periods of the project activity, the N_2O concentration and volume or mass flow of the tail gas are to be monitored continuously. The monitoring system is maintained throughout the crediting period based on the European Norm 14181 (2004), or any more recent update of that standard;
- The monitoring system provides separate hourly average values for the N_2O concentration and the volume or mass flow of the tail gas based on 1 second interval readings that are recorded and stored electronically. These N_2O data sets are identified by means of a unique time / date key indicating when exactly the values were observed;
- The correction factors derived from the calibration curve of the QAL2 audit for the monitoring components as determined during the QAL2-test in accordance with EN 14181 are applied to both the N_2O concentration and the volume or mass flow of the tail gas. This can either be applied automatically to the raw data recorded by the data storage system at the plant or it can be applied to the calculated hourly averages as part of the calculation of project emissions;
- If data for either the N_2O concentration or the volume or mass flow of the tail gas are not available for more than 1/3 of any hour while the plant was in operation, the value for that hour is replaced with the maximum value of N_2O concentration or volume or mass flow of the tail gas observed during the monitoring period. If data for neither the N_2O concentration nor the volume or mass flow of the tail gas are available for more than 1/3 of any hour while the plant was in operation, the maximum value of mass flow of N_2O calculated during the monitoring period is applied to any such hour. Values observed during five operating hours before and after a plant start-up and shut-down is excluded for the determination of the maximum values.

According to the “Tool to determine the mass flow of a greenhouse gas in a gaseous stream” (Version 02.0.0) the mass flow of greenhouse gas i in the gaseous stream in time interval t ($F_{i,t}$) is calculated based on measurements of

- a) The total volume flow or mass flow of the gas stream and
- b) The volumetric fraction of the gas in the gaseous stream and
- c) The water content and gas composition.

The tool covers possible measurement options, providing six different calculation options to determine the volume or mass flow of a particular greenhouse gas (A-F).

Furthermore, the tool provides several options for the determination of the moisture content of the gaseous stream. As the gaseous stream is assumed to be dry, Option A is applied. In order to apply this option, it shall be demonstrated that the gaseous stream is dry. As described in part (a) of Option A, the moisture content of the gaseous stream ($CH_2O_{i,t,db,n}$) will be measured and it shall be demonstrated that it is less or equal to 0.05 kg H_2O/m^3 dry gas. The moisture measurement shall coincide with the Annual Surveillance Test or the calibration of the flow meter for the gaseous stream.

In accordance with Option A of the tool, the mass flow of greenhouse gas i ($F_{i,t}$), which is calculated as follows:

$$(5) \quad F_{i,t} = V_{t,db} * v_{i,t,db} * \rho_{i,t}$$

With

$$(6) \quad \rho_{i,t} = \frac{p_t * MM_i}{R_u * T_t}$$

Where:

- $F_{i,t}$ = mass flow of greenhouse gas N_2O in the gaseous stream in time interval t (kg gas /h)
 $V_{t,db}$ = Volumetric flow of the gaseous stream in time interval t , on dry basis (m^3 dry gas/h)
 $v_{i,t,db}$ = Volumetric fraction of greenhouse gas N_2O in the gaseous stream in a time interval t on a dry basis (m^3 gas N_2O/m^3 dry gas)
 $\rho_{i,t}$ = Density of greenhouse gas N_2O in the gaseous stream in a time interval t (kg gas N_2O/m^3 gas N_2O)

P_t = Absolute pressure of the gaseous stream in time interval t (Pa)
 MM_i = Molecular mass of greenhouse gas N_2O (kg/kmol)
 R_u = Universal ideal gases constant (Pa.m³/kmol.K)
 T_t = Temperature of the gaseous stream in time interval t (K)

Sample calculation for equation (5) applying average values for the monitoring period:

$F_{i,t}$	$V_{t,db}$	$V_{i,t,db}$	$\rho_{i,t}$
4.995	126,169	0.0000202	1.964

Calculation for equation (6) applying standard condition values:

$\rho_{i,t}$	P_t	MM_{N_2O}	R_u	T_t
1.96	101.33	44.02	8.31	273.150

The hourly values are then aggregated for the duration of the monitoring period n , as follows:

$$(7) \quad Q_{N_2O, tailgas, n} = \sum_{h=1}^{h=h_n} F_{N_2O, tailgas, h} * 10^{-3}$$

Where:

$Q_{N_2O, tailgas, n}$ = Amount of N_2O released through the tail gas of the project plant to the atmosphere in monitoring period n (t N_2O)
 $F_{N_2O, tailgas, h}$ = Mass flow of N_2O in the gaseous stream of the tail gas in the hour h (kg N_2O /h)
 h_n = Number of hours in monitoring period n during which the plant was in operation

Sample calculation applying summed-up values of the whole monitoring period:

Year	$Q_{N_2O, tail gas, n}$	$\sum F_{N_2O, tail gas, h}$	
2015	13.789	13,788.94	0.001
2016	16.378	16,378.02	0.001
Total	30.167		

During any periods in which a tertiary abatement system is by-passed, $F_{N_2O, tailgas, h}$ is set to zero in order to avoid double counting of project emissions.

$$(8) \quad Q_{N_2O, by-pass, n} = EF_{BL, N_2O, n} * P_{NA, n} * T_{open, n} * 10^{-3}$$

Where:

$Q_{N_2O, by-pass, n}$ = Amount of N_2O released through the by-pass to a tertiary N_2O abatement system to the atmosphere in monitoring period n (t N_2O)
 $EF_{BL, N_2O, n}$ = Default N_2O baseline emissions factor in the calendar year y of the monitoring period n (kg N_2O /t HNO_3)
 $P_{NA, n}$ = Nitric acid produced in the monitoring period n (t HNO_3)
 $T_{open, n}$ = Fraction of time in monitoring period n during which the by-pass valve on the line feeding the tertiary N_2O abatement facility was open to vent the gas directly to the atmosphere.

Sample calculation applying summed-up values of the whole monitoring period:

Year	$Q_{N_2O, by-pass, n}$	$EF_{BL, N_2O, n}$	P_{NA}	$T_{open, n}$
2015	0.00	3.40	113,953	0
2016	0.00	3.20	121,827	0
Total	0.00			

The emissions related to the operation of the N_2O destruction facility include only on-site emissions due to the fossil fuel use as input to the N_2O destruction facility:

Project emissions from the operation of the tertiary N₂O abatement facility (PE_{CO₂,tertiary,n})

The emissions related to the operation of the N₂O destruction facility include only on-site emissions due to the fossil fuel use as input to the N₂O destruction facility:

$$(9) \quad PE_{CO_2,tertiary,n} = PE_{FF,n}$$

Where:

PE_{CO₂,tertiary,n} = Project emissions of CO₂ from the operation of the tertiary N₂O abatement facility in monitoring period n (tCO₂)
 PE_{FF,n} = Project emissions related to fossil fuel input to the destruction facility and/or re-heater in monitoring period n (t CO₂)

For the determination of the project emissions related to the operation of the tertiary abatement system in monitoring period n the project proponents are required to use the latest version of the “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion.”

The parameter PE_{FC,i,j} used in the “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion” corresponds to the parameter PE_{FF,n} in the applied methodology:

$$(10) \quad PE_{FF,n} = PE_{FC,i,j}$$

CO₂ emissions from fossil fuel combustion in process j are calculated based on the quantity of fuels combusted and the CO₂ emission coefficient of those fuels, as follows:

$$(11) \quad PE_{FC,j,n} = \sum_i FC_{i,j,n} * COEF_{i,n}$$

Where:

PE_{FC,i,j,n} = CO₂ emissions from fossil fuel combustion in process j in monitoring period n (tCO₂/n)
 FC_{i,j,n} = Quantity of fuel type i combusted in the process j during the monitoring period n (mass or volume unit/n)

COEF_{i,n} = CO₂ emission coefficient of fuel type i in monitoring period n (tCO₂/mass or volume unit)
 i = fuel types combusted in process j during monitoring period n

Sample calculation applying summed-up values of the whole monitoring period:

Year	PE _{CO₂,tertiary,n}	$\sum FC_{i,j,n}$	COEF _{i,n}
2015	416.525	155.323	2.682
2016	474.949	177.109	2.682
Total	891.475		

As data about the chemical composition of the fuel type i is available COEF_{i,n} is calculated based on its chemical composition of the fossil fuel type i using Option A of the “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion” (Version 02):

$$(12) \quad COEF_{i,n} = W_{c,i,n} * 44/12$$

Where:

COEF_{i,n} = CO₂ emission coefficient of fuel type i in monitoring period n (tCO₂/mass or volume unit)
 wC_{i,n} = Is the weighted average mass fraction of carbon in fuel type i in monitoring period n (tC/mass unit of the fuel)

Sample calculation applying summed-up values of the whole monitoring period:

Year	COEF _{i,n}	wC _{i,n}	
2015	2.682	0.731	44/12

2016	2.682	0.731	44/12
------	-------	-------	-------

$wC_{i,y}$ is calculated according to a mass fraction calculation of carbon in the fuel type applied

Natural gas composition in year 2015						
Component	Atoms Carbon per molecule	Molar weight	mol Fraction	Molar weight - weighted	Carbon content Molar weight - weighted	mass fraction of carbon in fuel = $wC_{i,y}$
		g/mol	%	g/mol	g/mol	
Carbon		12.011				
Nitrogen	0	28.013	2.012	0.564	0.000	
Carbon dioxide	1	44.010	0.000	0.000	0.000	
Methane	1	16.043	93.890	15.063	11.277	
Ethane	2	30.070	2.221	0.668	0.534	
Propane	3	44.096	0.978	0.431	0.352	
i Butane	4	58.120	0.252	0.146	0.121	
n Butane	4	58.120	0.291	0.169	0.140	
i pentane	5	72.150	0.086	0.062	0.052	
n pentane	5	72.150	0.054	0.039	0.032	
neo Pentane	5	72.150	0.006	0.004	0.004	
Hexane	7	86.180	0.058	0.050	0.049	
Heptane	7	100.210	0.097	0.097	0.082	
Octane	8	114.230	0.023	0.026	0.022	
Nonane	9	128.260	0.022	0.028	0.024	
			Total	17.348	12.688	0.731

Natural gas composition in year 2016						
Component	Atoms Carbon per molecule	Molar weight	mol Fraction	Molar weight - weighted	Carbon content Molar weight - weighted	mass fraction of carbon in fuel = $wC_{i,y}$
		g/mol	%	g/mol	g/mol	
Carbon		12.011				
Nitrogen	0	28.013	2.012	0.564	0.000	
Carbon dioxide	1	44.010	0.000	0.000	0.000	
Methane	1	16.043	93.890	15.063	11.277	
Ethane	2	30.070	2.221	0.668	0.534	
Propane	3	44.096	0.978	0.431	0.352	
i Butane	4	58.120	0.252	0.146	0.121	
n Butane	4	58.120	0.291	0.169	0.140	
i pentane	5	72.150	0.086	0.062	0.052	
n pentane	5	72.150	0.054	0.039	0.032	
neo Pentane	5	72.150	0.006	0.004	0.004	
Hexane	7	86.180	0.058	0.050	0.049	
Heptane	7	100.210	0.097	0.097	0.082	
Octane	8	114.230	0.023	0.026	0.022	
Nonane	9	128.260	0.022	0.028	0.024	
			Total	17.348	12.688	0.731

E.3. Calculation of leakage

>>

Any leakage emissions sources are deemed to be negligible.

E.4. Summary of calculation of emission reductions or net GHG removals by sinks

Item	Baseline emissions or baseline net GHG removals by sinks (t CO ₂ e)	Project emissions or actual net GHG removals by sinks (t CO ₂ e)	Leakage (t CO ₂ e)	GHG emission reductions or net GHG removals by sinks (t CO ₂ e) achieved in the monitoring period		
				Up to 31/12/2012	From 01/01/2013	Total amount
2015	115,457.03	4,525.63	0.00	0.00	110,931.40	110,931.40
2016	116,173.75	5,355.60	0.00	0.00	110,818.15	110,818.15
Total	231,630.78	9,881.23	0.00	0.00	221,749	221,749

E.5. Comparison of actual emission reductions or net GHG removals by sinks with estimates in registered PDD

Item	Values estimated in ex ante calculation of registered PDD	Actual values achieved during this monitoring period
Emission reductions or GHG removals by sinks (t CO ₂ e)	327,845	221,749

E.6. Remarks on difference from estimated value in registered PDD

>>

Due to the lower nitric acid production during the monitoring period, the achieved emission reductions were below the expected value.

Appendix 1. Contact information of project participants and responsible persons/entities

Project participant and/or responsible person/ entity	<input checked="checked" type="checkbox"/> Project participant <input type="checkbox"/> Responsible person/ entity for completing the CDM-MR-FORM
Organization name	Omnia Fertilizer, Division of Omnia Group (Pty) Ltd.
Street/P.O. Box	Eugene Houndry Street
Building	Northern Industries
City	Sasolburg
State/Region	Free State Province
Postcode	P.O. Box 384, Sasolburg 1947
Country	South Africa
Telephone	+27 16 970 7200
Fax	+27 16 976 2650
E-mail	ejack@omnia.co.za
Website	www.omnia.co.za
Contact person	
Title	Business Development Manager
Salutation	Mr.
Last name	Jack
Middle name	
First name	Eden
Department	
Mobile	+27 83 655 4617
Direct fax	
Direct tel.	
Personal e-mail	ejack@omnia.co.za

Project participant and/or responsible person/ entity	<input checked="" type="checkbox"/> Project participant <input type="checkbox"/> Responsible person/ entity for completing the CDM-MR-FORM
Organization name	Nordic Environment Finance Corporation
Street/P.O. Box	Fabianinkatu 34 / P.O.Box 241
Building	
City	Helsinki
State/Region	
Postcode	FI-00171 Helsinki
Country	Finland
Telephone	+358 (0)10 618 003
Fax	+358 9 630 976
E-mail	info@nefco.fi
Website	http://www.nefco.org
Contact person	
Title	
Salutation	Ms.
Last name	Helle
Middle name	
First name	Lindegaard
Department	
Mobile	
Direct fax	
Direct tel.	+358 10 6180 664
Personal e-mail	helle.lindegaard@nefco.fi

Project participant and/or responsible person/ entity	<input type="checkbox"/> Project participant <input checked="" type="checkbox"/> Responsible person/ entity for completing the CDM-MR-FORM
Organization name	Omnia Fertilizer, Division of Omnia Group (Pty) Ltd.
Street/P.O. Box	Eugene Houndry Street
Building	Northern Industries
City	Sasolburg
State/Region	Free State Province
Postcode	P.O. Box 384, Sasolburg 1947
Country	South Africa
Telephone	+27 16 970 7200
Fax	+27 16 976 2650
E-mail	pvdmerwe@omnia.co.za
Website	www.omnia.co.za
Contact person	
Title	
Salutation	Mr.
Last name	Van der Merwe
Middle name	
First name	Pieter
Department	
Mobile	+27 83 252 4854
Direct fax	+27 86 586 0727
Direct tel.	+27 16 970 7429
Personal e-mail	pvdmerwe@omnia.co.za

Project participant and/or responsible person/ entity	<input type="checkbox"/> Project participant <input checked="" type="checkbox"/> Responsible person/ entity for completing the CDM-MR-FORM
Organization name	klimaDOCK consulting Martin Stilkenbäumer
Street/P.O. Box	Am Kolk 6
Building	
City	Reinbek
State/Region	
Postcode	21465
Country	Germany
Telephone	+49 40 20918127
Fax	+49 40 7228698
E-mail	info@klimadock.de
Website	www.klimadock.de
Contact person	
Title	
Salutation	Mr.
Last name	Martin
Middle name	
First name	Stilkenbäumer
Department	
Mobile	+49 1577 142 54 90
Direct fax	+49 40 7228698
Direct tel.	+49 40 20918127
Personal e-mail	stilkenbaeumer@klimadock.de

- - - - -

Document information

<i>Version</i>	<i>Date</i>	<i>Description</i>
05.1	4 May 2015	Editorial revision to correct version numbering.
05.0	1 April 2015	Revisions to: <ul style="list-style-type: none"> • Include provisions related to delayed submission of a monitoring plan; • Provisions related to the Host Party; • Remove reference to programme of activities; • Overall editorial improvement.
04.0	25 June 2014	Revisions to: <ul style="list-style-type: none"> • Include the Attachment: Instructions for filling out the monitoring report form (these instructions supersede the "Guideline: Completing the monitoring report form" (Version 04.0)); • Include provisions related to standardized baselines; • Add contact information on a responsible person(s)/ entity(ies) for completing the CDM-MR-FORM in A.6 and Appendix 1; • Change the reference number from <i>F-CDM-MR</i> to <i>CDM-MR-FORM</i>; • Editorial improvement.
03.2	5 November 2013	Editorial revision to correct table in page 1.
03.1	2 January 2013	Editorial revision to correct table in section E.5.
03.0	3 December 2012	Revision required to introduce a provision on reporting actual emission reductions or net GHG removals by sinks for the period up to 31 December 2012 and the period from 1 January 2013 onwards (EB70, Annex 11).
02.0	13 March 2012	Revision required to ensure consistency with the "Guidelines for completing the monitoring report form" (EB 66, Annex 20).
01	28 May 2010	EB 54, Annex 34. Initial adoption.
Decision Class: Regulatory Document Type: Form Business Function: Issuance Keywords: monitoring report		