



**Project design document form
(Version 10.1)**

BASIC INFORMATION

Title of the project activity	BRASCARBON Methane Recovery Project BCA-BRA-08, Brazil.
Scale of the project activity	<input type="checkbox"/> Large-scale <input checked="" type="checkbox"/> Small-scale
Version number of the PDD	07
Completion date of the PDD	10/04/2018
Project participants	Brascarbon Consultoria, Projetos e Representação Ltda.
Host Party	Brazil
Applied methodologies and standardized baselines	AMS-III.D.: Methane recovery in animal manure management systems (version 20.1)
Sectoral scopes linked to the applied methodologies	Sectoral Scope 13: Waste handling and disposal
Estimated amount of annual average GHG emission reductions	59,238 tCO ₂ e

SECTION A. Description of project activity

A.1. Purpose and general description of project activity

The purpose of this project is to mitigate and recover animal effluent related Greenhouse Gas (GHG) by improving the Animal Waste Management System practices in the confined animal feed operations in the cities located at the São Paulo state, southwest Brazil, developed by BRASCARBON. In Brazil the agricultural operations related to the confined animals procedures are very wide and grow progressively and intensive to attend the worldwide food demand. There are three types of Confined Animal Operation for this project: finishing, breeding and nursery.

The scenario existing prior to the implementation of the project activity is the same as the baseline scenario, as follows: the confined animal wastewater, which consists of fresh water mixed with manure and urine that accumulates in pits under or beside the barns, is transported to one open lagoon for evaporation, fed by gravity pipeline systems. The organic material degraded in the primary treatment lagoon is digested, thereby producing significant amounts of methane. These systems emit methane (CH₄) resulting from anaerobic decomposition process. The swine livestock operations create profound environmental consequences, such as greenhouse gas emissions, odour and water/land contamination that result of storing animal waste, where this operation is not sustainable due to its severe environmental pollution.

The Project Activity consists in the construction of a new covered in-ground anaerobic reactor (digester) that will utilize the organic material currently treated in the wastewater opened lagoon, of the confined animal operations to produce biogas. All manure will be sent daily directly to digester not exceeding 24 hours in the barns.

The project activity is a Type III since it comprises activities not included in Type I or Type II and results in GHG emission reductions not exceeding 60 kt CO₂e per year in any year of the crediting period.

The expected result of this project is a significant reduction of GHG emissions compared to those emissions that would have occurred in the absence of the project and also promotion of sustainable swine production farms, bringing environmental and social benefits, moving from a high-GHG animal waste management system practice to anaerobic digester with capture and combustion of resulting biogas. The project proponent estimates 59,238 tCO₂e/year and 414,666 tCO₂e over the second 7 years crediting period will be reduced from the baseline scenario as a result of the installation of the project activity.

Contribution to sustainable development:

According to Brazil's Inter-Ministerial Commission on Global Climatic Change¹, manure management is an important issue that needs to be solved. The swine waste storage and treatment systems in Brazil consists of open tanks, open digesting and ponds (anaerobic lagoons) once they are the most economic and viable system approved to manage the manure in confined animals feed operations. Economic barriers are very common because can invest only in the confined feed operations and with no need to invest in waste management systems. Financial resources are always used to maintain the confined feed operation working. Also, waste treatment involves low technology, as open lagoons need less employees and technicians for operation and maintenance. For these reasons, the project is additional and more details can be found in the section B.5.

Just few producers invest in bio-digesters to have a modern waste management system. The material cumulated in the open lagoons is normally distributed by pumps or gravity and applied

¹<http://www.ambientebrasil.com.br>

to crops and pastures. EMBRAPA² stimulated by the Expansion and Waste Treatment Program of the State of Santa Catarina by giving instructions and providing publications to help the producers and agro-industries to implement projects or systems to control the animal waste management protecting the eco-system³.

Failure to do so will spread existing disease continually (i.e. increased (insect) pest populations, problems with allergies and livestock disease). With the purpose of avoiding this problem, Brazil has in recent years, required all confined animals feed operations to change from single to multi-lagoon systems, introducing a Good Practices in confined animal feed operations and even more recently has required them to line the bottom of their primary sedimentation lagoon to prevent effluent infiltration.

In 2005, the swine population in São Paulo state was 1.707.000.^{4 5} Considering that a typical hog produces 4.9 kilograms of effluent daily (Table A1), annually some 8.4 million metric tons of hog waste are produced in this state alone. Introducing a progressive animal waste management practices throughout this region of Brazil could result in an annual reduction of approximately 2.9 million tons⁶ of carbon dioxide equivalent (CO₂e/year).

Table A1 – Daily production of effluent by type of swine production

Stage	Manure kg/day	Manure and Urine kg/day	Volume litres/day
25-100 kg	2.3	4.9	7.0
Gestating sows	3.6	11.0	16.0
Nursing sows	6.4	18.0	27.0
Boar pig	3.0	6.0	9.0
Piglet	0.35	0.95	1.4

Source: PNMA-II – Projecto de Controlo da Degradação Ambiental Decorrente da Suinocultura em Santa Catarina, coordenado pelo Sr. Paulo Armando Vitoria de Oliveira, Concordia – SC, EMBRAPA Suínos e Aves, 2004;

http://www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_n3r85f3h.pdf

Socio-Economic Sustainability

- Improvement in air quality (e.g. – reduction of Volatile Organic Compounds [VOCs]) and worker safety;
- Elimination of odors in surrounding areas, improving the living standards of neighbors communities;
- Proper handling of the animal waste ensuring an adequate level of protection of human health and the environment;
- By improving the waste management system at the farm, the project will support the continued production of pork in order to meet the consumption needs of the growing global population.

² PNMA-II – Programa Nacional do Meio Ambiente, coordenado pelo Sr. Paulo Armando Vitoria de Oliveira, Concordia – SC, EMBRAPA Suínos e Aves, 2004;
http://www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_n3r85f3h.pdf

³ Boas Práticas de Produção de Suínos: http://www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_k5u59t7m.pdf

⁴ IBGE – Pesquisa Pecuária Municipal (www.ibge.gov.br).

⁵ www.agricultura.gov.br

⁶ Approximate calculation using IPCC model and emission factors

Economic Sustainability

- An increase in local employment of skilled labor for the manufacturing, installation, Operation and maintenance of equipment;
- Additional employment opportunities in the agro-industrial sector, specifically from the use of recycled water from the waste management system on the farms for agricultural activities in surrounding land;
- Infrastructure improvement is in direct alignment with the national goals and objectives for agriculture, livestock, rural development, fishing and nutrition.

Environmental Sustainability

- An overall decrease in the amount of Greenhouse Gases (GHGs) emitted into the atmosphere;
- Improvement in the quality of the water used in the waste management system and its potential use as water for irrigation;
- Avoiding potential dumping of waste into clean sources of water.

Technological Sustainability

- This project will promote a model for the reduction of GHGs produced by Confined Animal Operation and promote a transfer of technology for methane production and capture through anaerobic digestion and combustion.

A.2. Location of project activity

The project activity is located in the Southwest Region/State of São Paulo, cities Jarinu, Descalvado, Santo Antonio de Posse, Pilar do Sul, Águas da Prata, Limeira, Fartura and Monte Alegre do Sul. The geographical location of the project sites is shown in Figure A1 with specifics detailed in Table A2.

Table A2 – Detailed physical location and identification of project site

Farm / Site	Brascarbon ID	Address	Town/State	Contact	Phone	GPS Coord
Sítio Santa Cruz	BCA-053SP1-08	Estrada do Rio Abaixo, s/n - Bairro Ponte Alta	Jarinu, SP	Antonio Capobianco	+55 11 4535 1647	S 23° 02' 52,0" W 046° 41' 11,4"
Faz. Esmeralda	BCA-054SP1-08	Rod. SP 340 - Km 129	Santo Antonio de Posse, SP	Guilherme Van de Geest	+55 19 3802 4042	S 22° 33' 38,80" W 46° 58' 06,49"
Fazenda São Carlos	BCA-055SP1-08	Estrada Municipal Guilerme Scatena, km 6	Descalvado, SP	José Antonio G. Benvenga	+55 19 3583 1009	S 21° 51' 16,40" W 47° 38' 33,00 "
Fazenda Sta Elisa - Site 1	BCA-056SP1-08	Rod. Aguas da Prata-Poços de Caldas. Bairro Cascata	Aguas da Prata, SP	José Carlos G. Carneiro	+55 35 3721 2900	S 21° 52' 34,2 " W 46° 40' 28,29 "
Fazenda Sta Elisa - Site 2	BCA-056SP2-08	Rod. Aguas da Prata-Poços de Caldas. Bairro Cascata	Aguas da Prata, SP	José Carlos G. Carneiro	+55 35 3721 2900	S 21° 52' 19,44 " W 46° 40' 34,09 "
Agropecuária Sítio Herlu	BCA-074SP1-08	Bairro Chapadão, s/n	Pilar do Sul, SP	Hermano de Moura	+55 11 3645 2950	S 23° 54' 54,4" W 047° 51' 39,4"
Sítio Santo Antonio - Site 1	BCA-076SP1-08	Rod. SP 147, km 91	Limeira, SP	Pedro Antonio Tosello	+55 19 3864 1211	S 22° 31' 07,0" W 047° 14' 30,6"
Granja Lajeado	BCA-077SP1-08	Bairro Lajeado s/n	Fartura, SP	José Carlos Ribeiro	+55 14 3386 1106	S 23° 23' 31,8" W 049° 26' 40,44"
Faz. São José Nápoles	BCA-078SP1-08	Bairro Vargem Grande – CEP 13910-000	Monte Alegre do Sul	Érica Nápoles	+55 11 7310 3442	S 22° 45' 32,09" W 046° 37' 38,61"
Sítio Santo Antonio Site 2	BCA-079SP1-08	Rod. SP 147, km 91	Limeira, SP	Diana Tosello Lalon	+55 19 3864 1211	S 22° 31' 19,3" W 047° 14' 48,5"

Antonio Capobianco has one site in Jarinu city:

- Sitio Santa Cruz is a farrow-to-finish swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

Guilherme Van der Geest has one site in Santo Antonio de Posse city:

- Fazenda Esmeralda is a farrow-to-finish swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

José Antonio Garcia Benvenga has one site in Descalvado city:

- Fazenda São Carlos is a farrow-to-finish operation. The site uses two primary open lagoons for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation. Water from this lagoon will be used for irrigation.

José Carlos Gonçalves Carneiro has two sites in Aguas da Prata city:

- Fazenda Santa Elisa site 1 is a farrow-to-finish swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.
- Fazenda Santa Elisa Site 2 is a farrow-to-finish swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

Hermano de Moura has one site in Pilar do Sul city:

- Agropecuaria Sitio Herlu is a finishing swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

Pedro Antonio Tosello has one site in Limeira city:

- Fazenda Santo Antonio site 1 is a farrow-to-finish swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

Jose Carlos Ribeiro has one site in Fartura city:

- Granja Lajeado is a farrow-to-finish swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

Érica Nápoles has one site in Monte Alegre do Sul city:

- Fazenda São José Nápoles is a farrow-to-finish swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

Diana Tosello Lalonio has one site in Limeira city:

- Fazenda Santo Antonio Site 2 is a finishing swine operation. The site uses one primary open lagoon for animal waste storage. Waste from the barns is removed via the pull plug method and then routed to the open lagoon. The methods of effluent disposition used are surface spread and irrigation.

Figure A3 State of São Paulo, Brazil – cities location of the project sites



A.3. Technologies/measures

The technology used is an anaerobic digestion process in which microorganisms break down biodegradable material in the absence of oxygen. The process is widely used to treat wastewater sludge and organic wastes because it provides the reduction of both volume and mass of the input material.

As part of an integrated waste management system, anaerobic digestion reduces the emission of the greenhouse gas into the atmosphere. Anaerobic digestion is a renewable energy source because the process produces a methane and carbon dioxide, rich biogas, suitable for energy production helping replace fossil fuels. The nutrient-rich solids left after digestion can be used as fertilizer also.

The digestion process begins with bacterial hydrolysis of the input materials in order to break down insoluble organic polymers such as carbohydrates and make them available for other bacteria. Acidogenic bacteria then convert the sugars and amino acids into carbon dioxide, hydrogen, ammonia, and organic acids. Acetogenic bacteria then convert these resulting organic acids into acetic acid, along with additional ammonia, hydrogen, and carbon dioxide. Methanogenic bacteria finally are able to convert these products to methane and carbon dioxide.

The equipment is based at an ambient temperature storage covered cells (lagoon) with sufficient capacity to create an adequate Hydraulic Retention Time (HRT). The cell will use a single-piece liner affixed to a reinforced outer concrete frame. The outer cover consists of a synthetic vinyl membrane or High-Density Polyethylene (HDPE)-, which is also fastened to the frame. The liner and cover will be sealed together with bolts and iron plate frame. The system also includes a piping biogas collector, from the digester to the flare system.


The flare is enclosed and controlled by a data logger PLC – Programmable Logic Controller – in which the combustion temperature is stored every one minute in the system. This system will record every each minute the combustion temperature to determinate the flare efficiency according to the specification of the flare. A thermocouple installed in the flare is connected to the PLC to control the combustion temperature. The sparking system in the flare is automatic. Every one second the system sparks. The biogas flow rate will be also controlled by a PLC in which every each minute the system records the flow rate. The sparking system, the PLC and the control panel are powered by a 12 volts battery charged by solar cells.

A derivation pipe will be installed before the flare and after the flow meter, for future proposals, to supply biogas to the electricity generators, for in site electricity supply where **no claims for emissions reductions** by the electricity generation will be requested during the entire project activity but by the emissions reductions of the biogas destroyed in the generators.

The treated effluent is discharged to the open lagoons where it is aerated as per the design of the original lagoon system. The treated water can be then recycled and sent back to the farm proposals, or used for irrigation. No electricity will be consumed from the grid. The technical parts that will be powered by energy will be supplied by solar cells. The energy will be stored in 12 volts batteries

The sludge from the digesters will be spread aerobically in the surface of the pasture or plantation as fertiliser in a depth less than 0.30 meters.

Figure A4 – Flowchart of the treatment system

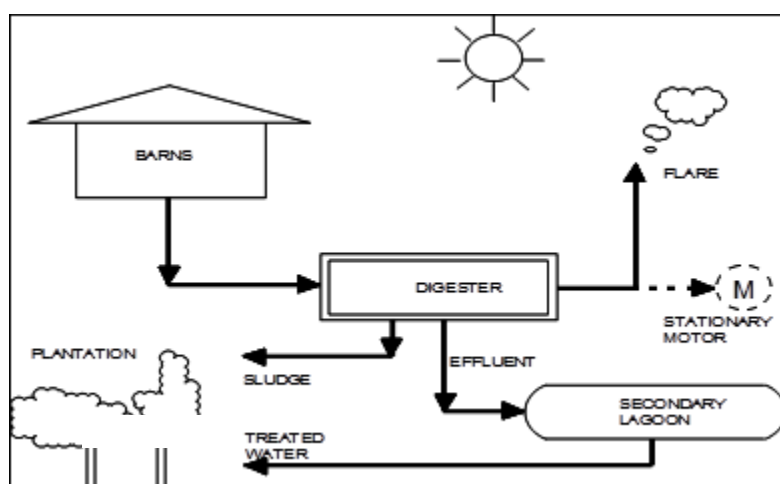

Prior to the implementation of the project activity, the confined animal wastewater, which consists of fresh water mixed with manure and urine that accumulates in pits under or beside the barns, is transported to one open lagoon for evaporation, fed by gravity pipeline systems. The organic material degraded in the primary treatment lagoon is digested, thereby producing significant amounts of methane. These systems emit methane (CH₄) resulting from anaerobic decomposition process. The scenario existing prior to the implementation of the project activity is the same as the baseline scenario.

A.4. Parties and project participants

Parties involved	Project participants	Indicate if the Party involved wishes to be considered as project participant (Yes/No)
Brazil	Brascarbon Consultoria, Projetos e Representação Ltda. (private entity)	No

A.5. Public funding of project activity

The project activity did not receive any public funding from Party(ies) included in Annex 1.

A.6. History of project activity

The start of the first construction was 15/12/2008. All sites included in the PDD and the relevant dates of the project implementation for each site are described in the following table A3. The project was initially composed by 15 sites (farms). However, during the first 7 years of the project, some farms terminated their swine business activity. Hence, the farms were withdrawn from the current project activity. The project was registered in 08/09/2010 and has already requested the renewal of the crediting period.

Table A3. Relevant dates of project implementation.

Farm/Site Name	Brascarbon ID	Start Construction	Finish Construction	Start-up and Tests	Monitoring Start Date
Sítio Santa Cruz	BCA-053SP1-08	19/01/2009	27/05/2009	29/06/2009	04/08/2009
Faz. Esmeralda	BCA-054SP1-08	15/12/2008	13/04/2009	25/05/2009	05/07/2009
Fazenda São Carlos	BCA-055SP1-08	12/01/2009	18/05/2009	27/07/2009	09/09/2009
Fazenda Sta Elisa - Site 1	BCA-056SP1-08	02/02/2009	17/06/2009	20/07/2009	31/10/2009
Fazenda Sta Elisa - Site 2	BCA-056SP2-08	02/02/2009	17/06/2009	20/07/2009	24/08/2009
Agropecuária Sítio Herlu	BCA-074SP1-08	20/05/2008	28/10/2008	14/09/2009	01/11/2009
Sítio Santo Antonio - Site 1	BCA-076SP1-08	12/01/2009	18/05/2009	27/07/2009	30/09/2009
Granja Lajeado	BCA-077SP1-08	06/04/2009	17/08/2009	28/09/2009	31/10/2009
Faz. São José Nápoles	BCA-078SP1-08	23/03/2009	10/08/2009	12/08/2009	26/10/2009
Sítio Santo Antonio - Site 2	BCA-079SP1-08	12/01/2009	18/05/2009	27/07/2009	25/10/2009

A.7. Debundling

Based on paragraph 2 of Appendix C of the Simplified Modalities and Procedures for Small-Scale CDM project activities^{7,8}, this project is not a debundled component of a large project activity. There are no other registered small-scale CDM project activities with the same project participants, in the same project category and technology/measure whose project boundary is within 1 km of the project boundary of the proposed small-scale activity.

⁷ <http://cdm.unfccc.int/Projects/pac/howto/SmallScalePA/sscdebund.pdf>

⁸ <http://cdm.unfccc.int/Projects/pac/howto/SmallScalePA/sscdebund.pdf>

SECTION B. Application of selected methodologies and standardized baselines

B.1. Reference to methodologies and standardized baselines

AMS-III.D – “Methane recovery in animal manure management systems” (Version 20.1)

For more information on this methodology, please refer to the link:

<http://cdm.unfccc.int/methodologies/SSCmethodologies/approved.html>

The following tools were also used:

Methodological Tool: “Project and leakage emissions from anaerobic digesters” (version 02)

Methodological Tool: “Project emissions from flaring” (version 02)

Methodological Tool: “Assessment of the validity of the original/current baseline and to update the baseline at the renewal of a crediting period” (version 03.0.1)

B.2. Applicability of methodologies and standardized baselines

The choice of the selected simplified methodology is considered to be appropriate because the project activity meets each applicability conditions of the selected methodology AMS III-D (Version 20.1).

a) The livestock population in the farm is managed under confined conditions:

All farms included in this project activity are managed under confined conditions confirmed by the obligatory environmental licenses whose document releases the Confined Animals Feed Operation business. The environmental licenses can be found at Brascarbon and it's available for validation and verification.

b) The manure, after treatment, will not be discharged into natural water resources:

The environmental legislation does not approve any manure or manure after treatment discharging into the natural water resources. Before releasing the environmental licenses by the Environmental Department, the Confined Animal Feed Operation activity is checked to confirm that all effluent after treatment is not discharged into the natural water resources. According item a) above, the environmental licenses can be found at Brascarbon an available for validation and verification.

c) The annual average temperature of baseline site where anaerobic manure treatment facility is located is higher than 5°C:

The annual average temperature verified in city of reference to the São Paulo state is 23-25°C, so higher than what the methodology states as a minimum: 5°C. This information can be verified through on INPE (National Institute of Space Research) web site.

d) In the baseline scenario the retention time of manure waste in the anaerobic treatment system is greater than one month, and if anaerobic lagoons are used in the baseline, their depths are at least 1 m:

The retention time of waste in open anaerobic open lagoons has proven to be more than 1 month as recommended by EMBRAPA (from 30 to 40 days)⁹. The depth was higher than 1 meter, and has been verified by measurements taken on each farm. This information is available for validation and verification.

⁹ http://www.cnpsa.embrapa.br/down.php?tipo=publicacoes&cod_publicacao=186

e) No methane recovery and destruction by flaring, combustion or gainful use takes place in the baseline scenario;

The baseline scenario for all farms in this PDD is a Confined Animal Feed Operation with open anaerobic lagoons for the manure treatment system. No methane recovery and destruction by flaring, combustion or gainful use takes place in the baseline scenario, which can be verified in each farm during validation. The project is new and does not involve capacity additions to the baseline scenario. This complies with para 7 and 8 of AMS-III.D version 20.1.

The project will also satisfy the following conditions:

a) The residual waste from the animal manure management system shall be handled aerobically, otherwise the related emissions shall be taken into account as per relevant procedures of AMS-III.AO "Methane recovery through controlled anaerobic digestion". In case of soil application, proper conditions and procedures (not resulting in methane emissions) must be ensured;

The final sludge will be handled aerobically. It will be applied in the soil, according with the proper conditions and procedures, being assured that no methane emissions are resulting from this application. The project involves the use of treated effluent for irrigation in farms and application of stabilized sludge on crops irrigation in farms, without any anaerobic conditions. The practice is to distribute the sludge over the field according the usual practice to improve the field fertilization. This complies with para 4(a) of AMS-III.D version 20.1.

b) Technical measures will be used ensuring that all biogas produced by the digester is used or flared:

The project involves facilities to burn (flaring) the biogas generated by the digester. This complies with para 4(b) of AMS-III.D version 20.1. An enclosed flare will be used in the project and also sized to support high temperatures. A continuous sparking system is installed in the combustion chamber of the flare. In adequate conditions, the project activity will install electricity generator for in site electricity supply of farm needs according to conditions established on para 4 of AMS-III.H version 18.0, although no claims for emissions reductions by the electricity generation will be requested during the entire project activity, only by the emissions reductions of the biogas destroyed in the generators. This comply with para 6 of AMS-III.D version 20.1.

c) The storage time of the manure after removal from the animal barns, including transportation, will not exceed 45 days before being fed into the anaerobic digester:

This situation is assured due to the fact that the barns are directly connected to the biodigesters and considering the common farms practices where each day the barn is washed and all waste is removed by the water flushing system sent to the digester. This complies with para 4(c) of AMS-III.D version 20.1. The Confined Animal Feed Operation Practices follows recommendations from EMBRAPA (Empresa Brasileira de Agricultura e Agropecuária) to get high standards of sanitary conditions in the confined operations. These recommendations can be found at EMBRAPA web site where all producers use as a guideline.

Finally, the project doesn't involve any landfill activity. The project activity recovers methane generated in the treatment of swine manure by installing methane recovery and combustion systems (biodigester). This complies with para 5 of AMS-III.D version 20.1.

Utilization of the recovered biogas in one of the options detailed in AMS-III.H is also eligible under this methodology. The respective procedures in AMS-III.H shall be followed in this regard. If the recovered biogas is used to power auxiliary equipment of the project activity, it

should be taken into account accordingly, using zero as its emission factor; however, energy used for such purposes is not eligible as an SSC CDM Type I project component.

New facilities (Greenfield projects) and project activities involving capacity additions compared to the baseline scenario are only eligible if they comply with the related and relevant requirements in the "General guidelines for SSC CDM methodologies".


The requirements concerning demonstration of the remaining lifetime of the replaced equipment shall be met as described in the "General guidelines for SSC CDM methodologies".

The project activity is a Type III: other project activities not included in Type I or Type II that result in GHG emission reductions not exceeding 60 kt CO₂e per year in any year of the crediting period. this is clearly demonstrated in Tables B.7 and B.8 of Section B.6.

B.3. Project boundary, sources and greenhouse gases (GHGs)

According to version 20.1 of the AMS-III.D methodology, the project boundary is defined as the physical, geographical site of the livestock, of the manure generation and management systems and of the equipment installed which recover and flare the methane. This is described in Figure B1 in a schematic format. As there is the future possibility to install electricity generator for in site electricity supply, this component is also included (dotted) within the project boundary.

Figure B1 – Project Boundary

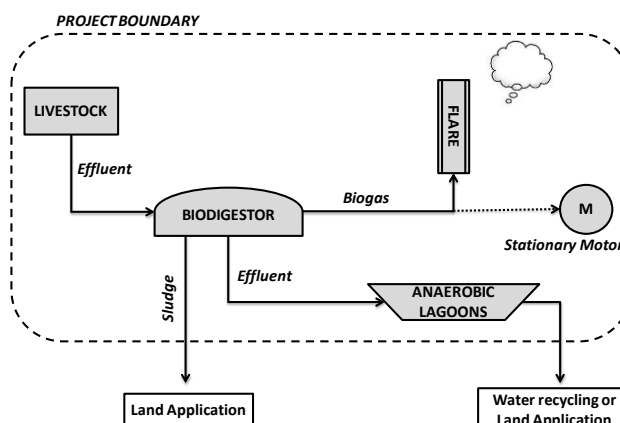

Source		GHG	Included?	Justification/Explanation
Baseline Scenario	Emissions from the open lagoons	CO ₂	No	CO ₂ emissions from the decomposition of organic waste are not accounted
		CH ₄	Yes	The major source of emissions in the baseline
		N ₂ O	No	N ₂ O emissions from the decomposition of organic waste are not accounted
Project activity	Emissions from the open lagoons	CO ₂	No	Excluded for simplification. This emission source is considered to be very small
		CH ₄	No	Excluded for simplification. This emission source is considered to be very small
		N ₂ O	No	Excluded for simplification. This emission source is considered to be very small
	Emissions from on-site electricity use	CO ₂	No	No electricity is consumed in the project activity
		CH ₄	No	No electricity is consumed in the project activity
		N ₂ O	No	No electricity is consumed in the project activity

B.4. Establishment and description of baseline scenario

In accordance with "Assessment of the validity of the original/current baseline and update of the baseline at the renewal of the crediting period" (version 03.0.1), the validity of the current baseline is assessed using the following sub-steps:

Step 1: Assess the validity of the current baseline for the next crediting period

Step 1.1: Assess compliance of the current baseline with relevant mandatory national and/or sectoral policies

Prior to the registration of the project as a CDM, there was no legal obligation for swine farms to capture and destroy the methane in their effluent being the open lagoons the common practice and the effluent treatment required by the law. This situation prevails until today, hence, currently, there is still no legal requirement for the capture and destroy of the methane content in swine farm effluents,

Although there was no regional or national legal requirement in Brazil establishing the implementation of biodigestors in swine farms to collect and destroy the methane produced, at the time the project activity was validated, a very small share of swine farms had biodigestors, being the open lagoons, the majority of the effluent treatment adopted.

Step 1.2: Assess the impact of circumstances

The previously identified baseline scenario for the project activity has not changed at the time of requesting renewal of the crediting period. Although the previously identified baseline scenario for the project activity remains the same, it is important to note that baseline emissions and ex-ante estimations of emission reductions to be achieved by the project activity during the 2nd 7-year renewable crediting period have changed when compared assumptions as presented in the latest version of the PDD (and related emission reduction spreadsheet) valid for the 1st 7-

year crediting period. There was made an update in the number of animals for each farm which led to different emissions reductions per site. Also, there were also some farms which have terminated their activity and therefore were withdrawn from the project activity.

Furthermore, it is also noteworthy that the ex-ante selected value for Global Warming Potential (GWP) for methane (CH₄) which is valid for the 2nd 7-year crediting period (the value valid for the 2nd commitment period of the Kyoto Protocol) is higher than the one previously applied (value of 25 instead of 21 values previously applied).

While the baseline scenario identified at the validation stage of the project activity was the continuation of the current practice without any investment, an assessment of the changes in market characteristics is thus required for the renewal of the crediting period. This is required by the methodological tool —Assessment of the validity of the original/current baseline and to update the baseline at the renewal of a crediting period” (version 03.0.1). Hence the current baseline does not need to be updated.

Step 1.3: Assess whether the continuation of use of current baseline equipment(s) or an investment is the most likely scenario for the crediting period for which renewal is requested.

The baseline scenario identified at the validation of the project activity was the continuation of the current practice without any investment, there's no current baseline equipment or an investment, hence the current baseline does not need to be updated. Go to step 1.4.

Step 1.4: Assessment of the validity of the data and parameters

Some methodological requirements, ex-ante selected data and parameters which were previously determined during the project validation period and thus prior to the start of the 1st 7-year crediting period as per the applicable requirements of the earlier applied CDM baseline and monitoring methodology (AMS-III.D (version 14)) will not any longer be valid/applicable during the 2nd 7-year crediting period. As per the applied latest version of the valid CDM baseline and monitoring methodology (AMS-III.D (version 20.1)) and related methodological tools, there are differentiated methodological approaches which are applicable and thus should be considered (incl. some of the ex-ante determined parameters, other default values and even other assumptions). Due to that, other data and ex-ante determined parameters are thus applied in the context of the demonstration of the validity of the earlier derived baseline scenario and also applied in the determination of baseline emissions during the 2nd 7-year crediting period. Thus, some of data and parameters as presented in the latest version of the PDD valid for the 1st crediting period not any longer valid.

As a conclusion, since the demonstration of validity of the earlier derived baseline scenario, determination of baseline emissions during the 2nd 7-year crediting period and ex-ante determined parameters and default values are all determined/calculated as per applicable guidance of AMS-III.D (version 20.1) and related methodological tools, the validity of earlier defined ex-ante determined parameters is thus limited. The methodological approaches for the demonstration of validity of the earlier derived baseline scenario, baseline emissions during the 2nd 7-year crediting period, ex-ante determined parameters and monitored parameters are presented and justified in this Section, in Section B.6.1, Section B.6.2 and Section B.7.1 respectively.

Step 2: Update the current baseline and the data and parameters

Step 2.1: Update the current baseline

The determination of the baseline scenario (as per applicable guidance of AMS-III.D (version 20.1)) is included below under “Determination of the baseline scenario”. It is important to note that while the baseline scenario for the project activity was not changed for the 2nd 7-year renewable crediting period, the applied methodological approaches for the determination of baseline scenario and baseline emissions (as per AMS-III.D (version 20.1)) is indeed different than the one required by the previously applied methodology AMS-III.D (version 14). Thus, for completeness reasons, this PDD includes the whole determination of the baseline scenario and baseline emissions as per the applicable guidance and requirements and stepwise approaches of AMS-III.D (version 20.1) regardless the fact baseline scenario remains being the same.

The determination of baseline emissions (by following all applicable guidance and requirements of AMS-III.D (version 20.1) and applicable related methodological tools) is presented in Section B.6.1. Related ex-ante estimations of baseline emissions for the 2nd 7-year crediting period are summarized in Section B.6.3.

Step 2.2: Update the data and parameters

All applicable and required ex-ante determined parameters valid for the 2nd 7-year renewable crediting period are presented in Sections B.6.1 and B.6.2.

While some of the ex-ante determined parameters (which are summarized in Sections B.6.1 and B.6.2) are applied only in the context of ex-ante estimations of emission reductions along the 2nd crediting period, other ex-ante determined parameters will however be used for the calculation/determination of emission reductions in an ex-post basis (in conjunction with parameters determined ex-post) along the 2nd 7-year crediting period.

It is also important to consider that AMS-III.D (version 20.1) and applicable methodological tools include parameters (ex-ante or ex-post determined) which were not previously applied/considered in the PDD valid for the 1st 7-year crediting period (as this PDD was completed in accordance requirements and guidance of the baseline and monitoring methodology AMS-III.D (version 14)). Furthermore, as also outlined previously, the value for the Global Warming Potential (GWP) for the GHG methane is also changed for the 2nd crediting period when compared to the value previously applied during the largest fraction of the 1st crediting period. The applied revised value for the ex-ante determined parameter GWPCH₄ is in accordance with the “Standard for application of the global warming potential to clean development mechanism project activities and programmes of activities for the second commitment period of the Kyoto Protocol”.

Determination of the baseline scenario

This section is based on the equations used on the approved methodology AMS-III.D version 20.1 and data from 2006 IPCC Guidelines for National GHG Inventories, volume 4, chapter 10.

The amount of methane that would be emitted to the atmosphere in the absence of the project activity can be estimated by referring to the equation B1 – Baseline emissions from manure management, according to the methodology AMS-III.D – version 20.1.

The final draft of this baseline section was completed on 01/04/2009. The name of entity determining the baseline is Brascarbon which is a project participant, as well as the project developer.

The baseline for this project activity is defined as the amount of methane that would be emitted to the atmosphere during the crediting period in the absence of the project activity. In this case

an open anaerobic lagoon is considered as the baseline and estimated emissions are determined as follows:

Step 1: Animal Population.

Animal populations for the project activity sites are described in this section (table B2).

Step 2: Baseline Emissions.

Baseline emissions (BE_y) are calculated by using one of the following two options:

(a) Using the amount of the waste or raw material that would decay anaerobically in the absence of the project activity, with the most recent IPCC tier 2 approach (please refer to the chapter 'Emissions from Livestock and Manure Management' under the volume 'Agriculture, Forestry and other Land use' of the 2006 IPCC Guidelines for National Greenhouse Gas Inventories). For this calculation, information about the characteristics of the manure and of the management systems in the baseline is required. Manure characteristics include the amount of volatile solids (VS) produced by the livestock and the maximum amount of methane that can be potentially produced from that manure (B₀);

(b) Using the amount of manure that would decay anaerobically in the absence of the project activity based on direct measurement of the quantity of manure treated together with its specific volatile solids (SVS) content.

Option a) was chosen.

Equation B1

$$BE_y = GWP_{CH_4} * D_{CH_4} * UF_b * \sum MCF_j * B_{0,LT} * N_{LT,y} * VS_{LT,y} * MS\%_{BI,j}$$

Where:

BE_y Baseline emissions in year "y" (tCO₂e)

GWPC_{CH₄} Global Warming Potential (GWP) of CH₄ (25)

D_{CH₄} CH₄ density (0.00067 t/m³ at room temperature (20 °C) and 1 atm pressure).

LT Index for all types of livestock

j Index for animal waste management system

MCF_j Annual methane conversion factor (MCF) for the baseline animal waste management system "j"

B_{0,LT} Maximum methane producing potential of the volatile solid generated for animal type "LT" (m³ CH₄/kg dm)

N_{LT,y} Annual average number of animals of type "LT" in year "y" (numbers)

V_{SLT,y} Volatile solids for livestock "LT" entering the animal manure management system in year "y" (on a dry matter weight basis, kg dm/animal/year)

MS%_{BI, j} Fraction of manure handled in baseline animal manure management system "j"

UF_b Model correction factor to account for model uncertainties (0.94)¹

As per definition of the methodology, "The maximum methane-producing capacity of the manure (B₀) varies by species and diet. The preferred method to obtain B₀ measurement values is to use data from country-specific published sources, measured with a standardised method (B₀

shall be based on total as-excreted VS). These values shall be compared to IPCC default values and any significant differences shall be explained. If country specific B0 values are not available, default values from tables 10 A-4 to 10 A-9 of 2006 IPCC Guidelines for National Greenhouse Gas Inventories volume 4 Chapter 10 can be used, provided that the project participants assess the suitability of those data to the specific situation of the treatment site”.

Also, the methodology refers that the “Volatile solids (VS) are the organic material in livestock manure and consist of both biodegradable and non-biodegradable fractions. For the calculations the total VS excreted by each animal species is required. The preferred method to obtain VS is to use data from nationally published sources. These values shall be compared with IPCC default values and any significant differences shall be explained. If data from nationally published sources are not available, country-specific VS excretion rates can be estimated from feed intake levels, via the enhanced characterisation method (tier 2) described in section 10.2 in 2006 IPCC Guidelines for National Greenhouse Gas Inventories Volume 4 chapter 10. If country specific VS values are not available IPCC default values from 2006 IPCC Guidelines for National Greenhouse Gas Inventories Volume 4 chapter 10 table 10 A-4 to 10 A-9 can be used provided that the project participants assess the suitability of those data to the specific situation of the treatment site particularly with reference to feed intake levels”

Brazil does not have any national published values nor sources to obtain the default values need. Hence, the VS values chosen for the current project were the 2006 IPCC Guidelines for National Greenhouse Gas Inventories Volume 4 chapter 10 table 10 A-7 and 10 A-8 for the Region Western Europe since they have proven to be the more suitable for the specific situation of the treatment site particularly with reference to feed intake levels.

The genetics used in the project are originally from that region and the values presented are the more similar when compared with the specific project site values. The same situation occurs with the feed intake level, which is then reflected in the specific animal weight, being the IPCC values for Western Europe swine the more adjusted and suited to the project sites.

Therefore, the parameter $VS_{LT,y}$ will be calculated according with the following methodology consideration “In case default IPCC values for VS are adjusted for a site-specific average animal weight, it shall be well explained and documented.”.

Where:

$VS_{LT,y}$ can be determinate by scaling default IPCC values to adjust for a site-specific average animal weight.

Equation B2

$$VS_{LT,y} = \left(\frac{W_{site}}{W_{default}} \right) * VS_{default} * nd_y$$

Where:

- W_{site} Average animal weight of a defined livestock population at the project site (kg)
- $W_{default}$ Default average animal weight of a defined population, this data is sourced from IPCC 2006 (kg)
- $VS_{default}$ Default value for the volatile solid excretion rate per day on a dry-matter basis for a defined livestock population (kg dm/animal/day)
- nd_y Number of days in year “y” where the treatment plant was operational.

According to paragraph 17 (d) from AMS-III.D version 20.1, B0 or VS values applicable to developed countries can be used provided the following four conditions are satisfied:

- *The genetic source of the livestock originates from an Annex I Party;*

Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association) – <http://www.abcs.org.br/>.

The genetic source of the livestock is therefore in compliance with this methodology requirement, which can be confirmed and verified by the genetic documents of the animals of each farm. These evidences were provided and assessed to assure their applicability to this requirement.

- *The farm uses formulated feed rations (FFR) which are optimized for the various animal(s), stage of growth, category, weight gain/productivity and/or genetics;*

The formulated feed rations are created according with the characteristics of the animals, their stage of growth, category, weight gain and genetics. Each farm possesses their FFR composition according with the type of animal(s) accommodated, which was confirmed and verified. These evidences were provided and assessed to assure their applicability this requirement.

- *The use of FFR can be validated (through on-farm record keeping, feed supplier, etc.);*

The formulated feed rations are part of the management system of the farms and therefore, each site possesses on-farm records which attest the FFR used. These evidences are also monitored on a monthly basis, according monitoring plan for the parameter FFR, as described in section B.7.1, and the PP internal procedure POP 14.

- *The project specific animal weights are more similar to developed country IPCC default values.*

The W_{site} value considered for each category of swine is the result of an average weight of the animals of all farms included in the project, and this value was applied in the baseline calculation.

Finishers is the animal category that represents majority of all animals from the farms included in this PDD, around 62% of the total number of animals (only three farms have other types of animals but not as significant as finishers). Finishers are considered to be “market swine” and presented an average weight of 90kg among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for *National Greenhouse Gas Inventories, Volume 4, chapter 10*, the weights that are more similar to the project situation are those from the Western Europe region (50 kg) – the values from Latin America (28 kg), where the project is located, is even lower than Western Europe’s.

This situation is also observed for the remaining four categories of swine (nursery and boars for market swine, gilts and sows for breeding swine): the values are more similar to those adopted in Western Europe than in Latin America, especially regarding the Breeding Swine (gilts and sows) and in the Market Swine (boars) which presented an average weight of 210kg and 230 kg respectively, among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for *National Greenhouse Gas Inventories, Volume 4, chapter 10*, the weights that are more similar to the project situation are those from the Western Europe region (198kg for Breeding Swine and 50 kg for Market Swine) – the values from Latin America (28kg for both classes of Breeding and Market Swine), where the project is located, is much lower than Western Europe’s. Only in the category nursery (also Market Swine), which roughly represents 28% of all animals from the farms included in this

PDD, have an average weight of 20 kg, closer to the Latin America values than the Western Europe values.

Therefore, is fair to consider that “*the project specific animal weights are more similar to developed country IPCC default values*” condition is fulfilled and that the VS adopted values for developed countries is in full compliance with the methodology requirements.

And,

(A) $N_{LT,y}$, the annual average number of animals can be determinate as follows:

Equation B3

$$N_{LT,y} = N_{da,y} * (N_{p,y} / 365)$$

Where:

$N_{da,y}$ Number of days animal is alive in the farm in the year “y” (numbers)

$N_{p,y}$ Number of animals produced annually of type “LT” for the year “y” (numbers)

Table B1 – Parameters and factors for the applying baseline equations

Parameter/Factor	Value	Source/Comment
VS_{default}	0.46 for breeding swine (sows, gilts) 0.3 for market swine (nursery, boars and finishers)	Obtained from IPCC2006, vol 4, chapter 10, Tables 10A-7 and 10A-8. Values for Western Europe
GWP_{CH_4}	25	IPCC Fourth Assessment Report: Climate Change 2007
$B_{0,LT}$	0.45	Obtained from 2006 IPCC, Table 10A-7, p.10.80 and Table 10A-8, p.10.81. Values for Western Europe
D_{CH_4}	0.00067	CH ₄ density at room temperature 20°C and 1 atm pressure.
MCF_j	79%	Obtained from 2006 IPCC, Chp.10 vol 4 - Table 10.17, p.10.45
$N_{LT,y}$	Table B2	Annual average number of animals of type “LT “ in year “y”(numbers)
$MS\%_{BI,j}$	100%	Fraction of manure handled in system “j”.
W_{default}	198 kg breeding and 50 kg market	Obtained from IPCC2006, vol 4, chapter 10, Tables 10A-7 and 10A-8.
UF_B	0.94	Model correction factor to account for model uncertainties.

Table B2 – Parameters and factors for the specific animal category

ID	Farm/Site	Animal Category - N _{LT}					Total
		Sows	Finishers	Nursery/Weaners	Boars	Gilts	
1	Sítio Santa Cruz	700	8,000	2,500	250	13	11,463
2	Faz. Esmeralda	500	3,500	1,800	250	10	6,060
3	Fazenda São Carlos	1,500	11,000	6,000	600	15	19,115
4	Fazenda Sta Elisa - Site 1	300	2,700	1,100	100	9	4,209
5	Fazenda Sta Elisa - Site 2	600	4,800	2,200	162	11	7,773
6	Agropecuária Sítio Herlu	-	2,000	-	-	-	2,000
7	Sítio Santo Antonio - Site 1	700	3,200	3,000	49	14	6,963
8	Granja Lajeado	480	2,959	1,644	50	6	5,139
9	Faz. São José Nápoles	1,500	10,000	5,300	450	30	17,280
10	Sítio Santo Antonio Site 2	-	3,800	-	-	-	3,800
TOTAL		6,280	53,959	24,544	1,911	108	86,802

B.5. Demonstration of additionality

The table below is only applicable if the proposed project activity is a type of project activity which is deemed automatically additional, as defined by the applied approved methodology, tool, standardized baseline or specific renewable technologies/measures conferring automatic additional microscale CDM project activities proposed by a DNA and approved by the Board.

Specify the methodology, tool, standardized baseline or specific renewable technologies/measures conferring automatic additional microscale CDM project activities proposed by DNAs and approved by the Board, that establish automatic additionality for the proposed project activity (including the version number and the specific paragraph, if applicable).	N/A
Describe how the proposed project activity meets the criteria for automatic additionality in the relevant methodology, tool, standardized baselines or specific renewable technologies/measures conferring automatic additional microscale CDM project activities proposed by a DNA and approved by the Board.	N/A

In the absence of the project activity the methane resulting from the decomposition of animal wastes in the anaerobic lagoons is released into the atmosphere. Proof of an early consideration of CDM is available since:

- In September 2008 the PDD has been published for global stakeholder consultation;
- In March 2009 the Emission Reduction Purchase Agreement (ERPA) was signed between the Project Developer (Brascarbon) and the carbon credit Buyer (Luso Carbon Fund);
- The contracts between the project developer and the owner of the pig farms especially mention the project implementation under the context of CDM.

In absence of this project activity, the swine producers would not change their animal waste management system practices. They have no motivations or financial resources to implement a different waste treatment as open anaerobic lagoons. The swine waste storage and treatment systems in Brazil consists in open tanks, open digesting process and ponds (anaerobic lagoons), due to the most economic and viable system approved to manage the manure in confined animal feed operations. Also, the approved waste treatment used in the farms involves

less technology, as open lagoons, and need less employees and technicians for operation and maintenance.

Economic barriers are very common in the confined animals feed operations because producers invest only in the confined feed operations to be more competitive in the market. Financial resources are always used to maintain the confined feed operation working. This is one of the reasons of the additionality of the project activity.

The proposed project activity intends to improve current animal waste management system practices. These changes will result in the mitigation of anthropogenic GHG emissions by controlling the lagoon's decomposition processes and collecting and combusting the biogas. Also, the proposed project activity will be sized to accommodate each farm's maximum expected animal capacity.

In accordance with paragraph 28 of the simplified modalities and procedures for small-scale CDM project activities, a simplified baseline and monitoring methodology listed in Appendix B may be used if project participants can demonstrate that the project activity would otherwise not be implemented due to the existence of one or more barrier(s) listed in attachment A of Appendix B. Similarly, for the identified CDM project, following barriers have been overcome during project planning and execution:

Investment Barrier:

In the economic point of view, Brazilian pork producers face the same challenges as farmers in other nations due to increased worldwide pork production and low operating margins. Farm owners focus on the production, and odour benefits and water quality enhancements are rarely enough to compel an upgrade to an expensive advanced animal waste management system. Also, in the producer's point of view the animal waste is outside of the production process and has difficult financing challenges that should be considered. Even banks have been unwilling to finance such activities without government guarantees or other incentives. The anaerobic digester requires a much higher investment than an anaerobic lagoon. Therefore, this last one is the most likely alternative and can be considered as the baseline scenario.

To demonstrate the existence of an investment barrier, that prevents the implementation of the project without the revenue of the carbon credits, the project proponent has undertaken an investment analysis of the project activity (without the revenue of the carbon credits), considering three scenarios:

- **I: Baseline Scenario:** the installation of an anaerobic lagoon;
- **II: Project Scenario:** the installation of the anaerobic digester with flare.
- **III: Project Scenario + Generator:** the installation of the anaerobic digester with flare and a generator, which assumes that all the farms will install standard generators with a capacity of 40kW, to produce energy during 12 hours/day and will consume 100% of the energy produced for farm activities proposals. It is considered that the revenues associated with this scenario are the avoided costs with electricity purchase

The results of the financial analysis for the three scenarios are presented in tables B 2.1, B.2.2. and B.2.3.

In all scenarios, the Internal Return Rate (IRR) cannot be calculated hence the analysis is based on the NPV, using the discount rate of 12,13% - Brazilian bonds (taxa SELIC - <http://www.bcb.gov.br/> (average last 12 months from July/2008 to July/2009), in 21 years.

At the first scenario, table B 2.1, there is only negatives cash flows, as no revenue will be expected from the implementation of the project activity.

In the following table illustrates that there is no positive cash flow scenario involved in the project activity. Therefore, there is an investment barrier that prevents the implementation of the project activity.

Brascarbon decided to make the NPV calculation considering 21 years as the period of the project, that is the maximum period of the Small Scale project life cycle, instead of what is mentioned in the Annex 45 of the EB 41 (max period 20 years).

In the Baseline scenario (Table B2.1) and in the Project scenario (Table B2.2) there are only negatives cash flows, as no revenue will be expected from the implementation of the project activity.

In the Project + Generator scenario, Table B2.3, although the project activity generates positive returns from the avoided costs of the electricity purchase and this is enough to offset the maintenance costs of the anaerobic digester and the generator, the yearly cash-flows are not enough to recover the initial amount which is necessary to investment in the digester plus flare and generator. The NPV of this scenario is still negative, lower than in the baseline scenario.

Considering the analysis undertaken, it is determined that the project is “additional” from an economic perspective, as it is only viable with the revenues of the carbon credits.

Table B2.1. – Financial Analysis for Baseline Scenario (Anaerobic Lagoon) (US\$)

ID	FARM/SITE	Equipment costs	Installation costs	Other costs (operation, consultancy, engineering, etc.)	Maintenance costs			Revenues from the sale of electricity or other project related products, when applicable			TOTAL	NPV (US\$) (12,13% discount rate)	IRR (%)
					2010	year n	year n+1	2010	year n	year n+1			
1	Sítio Santa Cruz	-19,173	-5,150	0	-1,000	-1,000	-1,000	0	0	0	-25,323	-28,299	UNDEFINED
2	Faz. Esmeralda	-10,676	-4,940	0	-1,000	-1,000	-1,000	0	0	0	-16,616	-20,534	UNDEFINED
3	Fazenda São Carlos	-20,166	-9,833	0	-1,000	-1,000	-1,000	0	0	0	-30,999	-33,361	UNDEFINED
4	Fazenda Sta Elisa - Site 1	-8,849	-3,999	0	-1,000	-1,000	-1,000	0	0	0	-13,848	-18,066	UNDEFINED
5	Fazenda Sta Elisa - Site 2	-12,051	-6,273	0	-1,000	-1,000	-1,000	0	0	0	-19,324	-22,949	UNDEFINED
6	Agropecuária Sítio Herlu	-9,861	-5,221	0	-1,000	-1,000	-1,000	0	0	0	-16,082	-20,058	UNDEFINED
7	Sítio Santo Antonio - Site 1	-11,183	-5,447	0	-1,000	-1,000	-1,000	0	0	0	-17,630	-21,439	UNDEFINED
8	Granja Lajeado	-12,851	-5,681	0	-1,000	-1,000	-1,000	0	0	0	-19,532	-23,135	UNDEFINED
9	Faz. São José Nápoles	-16,134	-7,698	0	-1,000	-1,000	-1,000	0	0	0	-24,832	-27,861	UNDEFINED
10	Sítio Santo Antonio - Site 2	-6,404	-3,747	0	-1,000	-1,000	-1,000	0	0	0	-11,151	-15,660	UNDEFINED

Table B2.2 – Financial Analysis for Project Scenario (digester + flare) (US\$)

ID	FARM/SITE	Equipment costs	Installation costs	Other costs (operation, consultancy, engineering, etc.)	Maintenance costs			Revenues from electricity savings due the onsite energy production (during 12 hours/day in year)			TOTAL	NPV (US\$) (12,13% discount rate)	IRR (%)
					2010	year n	year n+1	2010	year n	year n+1			
1	Sítio Santa Cruz	-78,900	-52,600	0,00	-15,600	-15,600	-15,600	0	0	0	-147,100	-220,352	UNDEFINED
2	Faz. Esmeralda	-29,500	-19,700	0,00	-15,600	-15,600	-15,600	0	0	0	-64,800	-146,955	UNDEFINED
3	Fazenda São Carlos	-59,600	-39,700	0,00	-15,600	-15,600	-15,600	0	0	0	-114,900	-191,635	UNDEFINED
4	Fazenda Sta Elisa - Site 1	-23,600	-15,800	0,00	-15,600	-15,600	-15,600	0	0	0	-55,000	-138,215	UNDEFINED
5	Fazenda Sta Elisa - Site 2	-43,000	-28,400	0,00	-15,600	-15,600	-15,600	0	0	0	-87,000	-166,753	UNDEFINED
6	Agropecuária Sítio Herlu	-23,100	-15,400	0,00	-15,600	-15,600	-15,600	0	0	0	-54,100	-137,412	UNDEFINED
7	Sítio Santo Antonio - Site 1	-46,000	-30,700	0,00	-15,600	-15,600	-15,600	0	0	0	-92,300	-171,480	UNDEFINED
8	Granja Lajeado	-26,000	-17,400	0,00	-15,600	-15,600	-15,600	0	0	0	-59,000	-141,782	UNDEFINED
9	Faz. São José Nápoles	-44,500	-29,600	0,00	-15,600	-15,600	-15,600	0	0	0	-89,700	-169,161	UNDEFINED
10	Sítio Santo Antonio - Site 2	-38,800	-25,800	0,00	-15,600	-15,600	-15,600	0	0	0	-80,200	-160,689	UNDEFINED

Table B2.3 – Financial Analysis for Project Scenario + Generator (digester + flare + generator) (US\$)

ID	FARM/SITE	Equipment costs	Installation costs	Other costs (operation, consultancy, engineering, etc.)	Maintenance costs			Revenues from the sale of electricity or other project related products, when applicable (*)			TOTAL	NPV (US\$) (12,13% discount rate)	IRR (%)
					2010	year n	year n+1	2010	year n	year n+1			
1	Sítio Santa Cruz	-128,900	-62,600	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-194,463	-190,359	UNDEFINED
2	Faz. Esmeralda	-79,500	-29,700	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-112,163	-116,962	UNDEFINED
3	Fazenda São Carlos	-109,600	-49,700	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-162,263	-161,642	UNDEFINED
4	Fazenda Sta Elisa - Site 1	-73,600	-25,800	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-102,363	-108,222	UNDEFINED
5	Fazenda Sta Elisa - Site 2	-93,000	-38,400	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-134,363	-136,760	UNDEFINED
6	Agropecuária Sítio Herlu	-73,100	-25,400	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-101,463	-107,419	UNDEFINED
7	Sítio Santo Antonio - Site 1	-96,000	-40,700	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-139,663	-141,487	UNDEFINED
8	Granja Lajeado	-76,000	-27,400	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-106,363	-111,789	UNDEFINED
9	Faz. São José Nápoles	-94,500	-39,600	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-137,063	-139,168	UNDEFINED
10	Sítio Santo Antonio - Site 2	-88,800	-35,800	0	-20,600	-20,600	-20,600	17,637	17,637	17,637	-127,563	-130,696	UNDEFINED

In the Table B2.4 the summary of the investment analysis for each farm is presented and it can be seen that the Baseline scenario (anaerobic lagoon) appears as the most attractive option.

Table B2.4. – NPV Comparison for the three scenarios (US\$)

ID	FARM/SITE	NPV (1st SCENARIO) Open Lagoon	NPV (2nd SCENARIO) DIGESTER + FLARE	NPV (3rd SCENARIO) DIGESTER + FLARE+GENERATOR	IRR(%)
1	Sítio Santa Cruz	-220,352	-190,359	-28,299	UNDEFINED
2	Faz. Esmeralda	-146,955	-116,962	-20,534	UNDEFINED
3	Fazenda São Carlos	-191,635	-161,642	-33,361	UNDEFINED
4	Fazenda Sta Elisa - Site 1	-138,215	-108,222	-18,066	UNDEFINED
5	Fazenda Sta Elisa - Site 2	-166,753	-136,760	-22,949	UNDEFINED
6	Agropecuária Sítio Herlu	-137,412	-107,419	-20,058	UNDEFINED
7	Sítio Santo Antonio - Site 1	-171,480	-141,487	-21,439	UNDEFINED
8	Granja Lajeado	-141,782	-111,789	-23,135	UNDEFINED
9	Faz. São José Nápoles	-169,161	-139,168	-27,861	UNDEFINED
10	Sítio Santo Antonio - Site 2	-160,689	-130,696	-15,660	UNDEFINED

A sensitivity analysis of the Scenario Project + Generator (only scenario with revenues) was undertaken, considering the variations of 10% as recommended by the Guidelines on the Assessment of Investment Analysis (Annex 58 of the EB 51):

- Alternative A: Investment Cost: decrease in 10%
- Alternative B: Electricity Tariff: increase in 10%

The results are presented in the Table B2.5 and it can be seen that in both alternatives considered, the project is still not viable and the NPV is negative.

Table B2.5. – Sensitivity analysis summary (US\$)

ID	FARM/SITE	A - CONSIDERING 10% INVESTMENT COST REDUCTION	B - CONSIDERING 10% INCREASE OF THE ENERGY PRICE	IRR(%)
		NPV (3rd SCENARIO) DIGESTER + FLARE + GENERATOR	NPV (3rd SCENARIO) DIGESTER + FLARE + GENERATOR	
1	Sítio Santa Cruz	-173,280	-178,705	UNDEFINED
2	Faz. Esmeralda	-107,223	-105,308	UNDEFINED
3	Fazenda São Carlos	-147,435	-149,988	UNDEFINED
4	Fazenda Sta Elisa - Site 1	-99,357	-96,568	UNDEFINED
5	Fazenda Sta Elisa - Site 2	-125,042	-125,106	UNDEFINED
6	Agropecuária Sítio Herlu	-98,635	-95,765	UNDEFINED
7	Sítio Santo Antonio - Site 1	-129,296	-129,833	UNDEFINED
8	Granja Lajeado	-102,568	-100,135	UNDEFINED
9	Faz. São José Nápoles	-127,209	-127,514	UNDEFINED
10	Sítio Santo Antonio - Site 2	-119,584	-119,042	UNDEFINED

Premises adopted for the investment analysis calculation

UNIT PRICE OF ELECTRICITY (*)	(in US\$ /MWh)	111.86	US\$/MWh
	(in BRR\$ / MWh)	181.99	BRR\$/MWh
EXCHANGE RATE (**)	BRR\$/US\$	1.627	BRR\$/US\$
Total energy produced / farm/year	(in MWh / year)	157.68	MWh/y
Brazilian bonds (taxa SELIC) (***)		12.13	%

<http://aneel.gov.br/area.cfm?idArea=550> (FOR SUDESTE REGION- may/2008)

(**) 1,627 in 20/may/2008

(***) <http://www.bcb.gov.br/> (average last 12 months from July/2007 to June/2008)

From the 3 Scenarios considered, the installation of the open anaerobic lagoon (baseline scenario) is the most economic option to the swine producers. Both the investment and maintenance cost are inferior to the other scenarios considered and this is an option approved by the environment department. The negative cash flows and present value indicate that the farm producers would not engage and invest in any implementation of anaerobic digester plus flare with or without generator. Continuation of the actual practices, anaerobic lagoon, would be the most attractive course of action because it requires less investment (especially since all the producers already have an anaerobic lagoon under place) and this practice is compliant with the environmental legislation. The installation of an anaerobic lagoon is the option with higher GHG emissions.

Technological Barrier:

There is no technology requested for the waste management system, by the environment department, to be implemented in the confined animals feed operations. The actual and approved waste treatment system is open anaerobic lagoons considered also the most economic system to be installed.

The Brascarbon proposal is the installation of the anaerobic digester technology with biogas recovery and destruction.

Anaerobic digester systems must have sized properly to handle the projected animal/effluent volumes with a Hydraulic Retention Time (HRT) consistent with extracting most/all CH₄ from the manure. Variables such as temperature, pressure, methane concentration and density of the biogas have to be determinate or calculated to maintain the lifecycle of the project.

Special equipment such a biogas analyzer, to determine the concentration of the methane in the biogas, has to be acquired to verify the performance of the digester. An enclosed flare has also to be installed to capture and destroy the biogas produced in the digester. Many other instruments such thermo coupling, solar cells, batteries, flow meters, programmable logic controller (to save the temperature information) have also to be installed to perform and control the biogas production.

Also to the adequate operation of the digesters operational procedures have to be followed and managed by an expertise technician. Brascarbon will be responsible for implementing an external support without interfering in the confined animal feed operation because the local animal producers does not have staff available to perform these tasks.

Moreover, operations and maintenance requirements involved with this technology, including a detailed monitoring program to maintain system performance levels, must also be considered. Worldwide, few anaerobic digesters have achieved long-term operations, due primarily to inappropriate operations and maintenance.

The proposed animal waste management system represents the most advanced technology in the farm. The proposed project activity mitigates GHG emissions with associated environmental co-benefits.

Barrier Due to Prevailing Practice (National Policies and Circumstances)

According to researchers of Embrapa Swine and Poultry (CNPSEA), the common practice regarding swine waste storage and treatment systems in the Brazil consist of open tanks (esterqueiras), open digesting (bioesterqueiras), ponds (anaerobic, variable and aerobic), cesspit, storage or treatment of compost (in solid form). Very few bio-digesters exist. The material is normally distributed by pumps or gravity and applied to crops and pastures.

In order to clarify the actual circumstances regarding to confined animal operations in Brazil and the serious environmental problems that can occur due the bad animal waste management

system, EMBRAPA stimulated by the Expansion and Waste Treatment Program of the State of Santa Catarina published a Good Practices Manual with instructions and publications to help the producers and agro-industries to implement projects or systems to control the animal waste management protecting the eco-system¹⁰. This idea was supported by officers of national swine producers association (ABCS).

Although the installation of an animal waste management system will, by itself, provide the producers with some external benefits as it was stated before, the project itself could not be developed without the revenues from the CERs. CDM funding will help to alleviate the identified barrier by providing the financial means which are necessary to implement the project activity.

The starting date for this activity is expected was on 03/03/2008 where Brascarbon will sign the construction contract of the sites. The project activity schedule was prepared considering all steps of the project development and construction and it's available for review.

¹⁰ Boas Práticas de Produção de Suínos: http://www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_k5u59t7m.pdf

B.6. Estimation of emission reductions

B.6.1. Explanation of methodological choices

This section is based on the equations used on the approved methodology AMS.III.D – Version 20.1 – “**Methane recovery in animal manure management systems**” and data from 2006 IPCC Guidelines for National GHG Inventories, volume 4, chapter 10.

For baseline emissions calculation see section B.4 and all data is summarised in the section B.6.3, Table B.3 and Table B.4.

The project emissions for this project activity are defined as the amount of methane that would be emitted to the atmosphere during the crediting period due to the project activity. In this case an anaerobic digester is considered the project activity and estimated emissions are determined as follows:

Step 1: Emission Reductions.

Equation B4

$$ER_{y,estimated} = BE_y - PE_y$$

Where:

ER_y	=	emission reductions in t CO ₂ e/year
BE_y	=	the annual baseline methane emissions in t CO ₂ e/year
PE_y	=	project emissions in t CO ₂ e/year

The emission reductions which will be achieved by the project activity ex post will be determined through direct measurement of the amount of methane flared. The emission reductions achieved in any year will be the lowest value of the following:

Equation B4.1

$$ER_{y,ex-post} = \min[(BE_{y,ex-post} - PE_{y,ex-post}), (MD_y - PE_{power,y,ex-post})]$$

Where:

$ER_{y,ex-post}$	Emission reductions achieved by the project activity based on monitored values for year y (tCO ₂ e)
$BE_{y,ex-post}$	Baseline emissions calculated using equation 1 and using ex post monitored values of $N_{LT,y}$ and if applicable $VS_{LT,y}$ for year y (tCO ₂ e)
$PE_{y,ex-post}$	Project emissions calculated using equation 3 using ex post monitored values of $N_{LT,y}$, $MS\%_{i,y}$ and if applicable $VS_{LT,y}$ for year y (tCO ₂ e)
MD_y	Methane captured and destroyed or used gainfully by the project activity in year y (tCO ₂ e)
$PE_{power,y,ex-post}$	Emissions from the use of fossil fuel or electricity for the operation of the installed facilities based on monitored values in the year y (tCO ₂ e)

The flaring/combustion MD_y will be measured using the conditions of the flaring process and according the following equation:

Equation B4.2

$$MD_y = BG_{burnt,y} * W_{CH_4,y} * D_{CH_4} * FE * GWP_{CH_4}$$

Where:

$BG_{burnt,y}$	Biogas flared or combusted in year y (m^3)
$W_{CH_4,y}$	Methane content in biogas in the year y (volume fraction)
FE	Flare efficiency in the year y (fraction)
GWP_{CH_4}	Global Warming Potential (GWP) of CH_4 (25)
D_{CH_4}	Density of methane at the temperature and pressure of the biogas in the year " y " (t/m^3).

Step 2: Baseline Emissions.

According to the Equation B1 section B.4

$$BE_y = GWP_{CH_4} * D_{CH_4} * UF_B * \sum MCF_J * B_{0,LT} * N_{LT,y} * VS_{LT,y} * MS\%_{BI,j}$$

Where:

BE_y	Baseline emissions in year " y " (tCO_2e)
GWP_{CH_4}	Global Warming Potential (GWP) of CH_4 (25)
D_{CH_4}	CH_4 density ($0.00067 t/m^3$ at room temperature ($20^\circ C$) and 1 atm pressure).
LT	Index for all types of livestock
J	Index for animal waste management system
MCF_j	Annual methane conversion factor (MCF) for the baseline animal waste management system " j "
$B_{0,LT}$	Maximum methane producing potential of the volatile solid generated for animal type " LT " ($m^3 CH_4/kg dm$)
$N_{LT,y}$	Annual average number of animals of type " LT " in year " y " (numbers)
$VS_{LT,y}$	Volatile solids for livestock " LT " entering the animal manure management system in year " y " (on a dry matter weight basis, $kg dm/animal/year$)
$MS\%_{BI,j}$	Fraction of manure handled in baseline animal manure management system " j "
UF_B	Model correction factor to account for model uncertainties (0.94)

Step 3: Project Emissions.

According to the simplified baseline and monitoring methodology for a small-scale CDM project Type-III (AMS.III.D – version 20.1), project emissions consist of:

- Physical leakage of biogas in the manure management systems which includes production, collection and transport of biogas to the point of flaring/combustion or gainful use ($PEPL,y$);
- Emissions from flaring or combustion of the gas stream ($PEflare,y$);

(c) CO₂ emissions from use of fossil fuels or electricity for the operation of all the installed facilities ($PE_{power,y}$).

(d) CO₂ emissions from incremental transportation distances ($PE_{transp,y}$)

(e) Emissions from the storage of manure before being fed into the anaerobic digester ($PE_{storage,y}$)

Equation B5

$$PE_y = PE_{PL,y} + PE_{flare,y} + PE_{power,y} + PE_{transp,y} + PE_{storage,y}$$

Where:

PE_y	Project emissions in year “y” (tCO ₂ e)
$PE_{PL,y}$	Emissions due to physical leakage of biogas in year “y” (tCO ₂ e)
$PE_{flare,y}$	Emissions from flaring or combustion of the biogas stream in the year “y” (tCO ₂ e)
$PE_{power,y}$	Emissions from the use of fossil fuel or electricity for the operation of the installed facilities in the year “y” (tCO ₂ e)
$PE_{transp,y}$	Emissions from incremental transportation in the year y (tCO ₂ e), as per relevant paragraph in AMS-III.F
$PE_{storage,y}$	Emissions from the storage of the manure in the year “y” (tCO ₂ e)

Where:

(A) Emissions due to physical leakage of biogas can be determined as follows:

Equation B6

$$PE_{PL,y} = 0,10 * GWP_{CH_4} * D_{CH_4} * \sum B_{0,LT} * N_{LT,y} * VS_{LT,y} * MS\%_{i,y}$$

Where:

GWP_{CH_4}	Global Warming Potential (GWP) of CH ₄ (25)
$PE_{PL,y}$	Emissions due to physical leakage of biogas in year “y” (tCO ₂ e)
GWP_{CH_4}	Global Warming Potential (GWP) of CH ₄ (25)
D_{CH_4}	CH ₄ density (0.00067 t/m ³ at room temperature (20 °C) and 1 atm pressure).
LT	Index for all types of livestock
J	Index for animal waste management system
$B_{0,LT}$	Maximum methane producing potential of the volatile solid generated for animal type “LT” (m ³ CH ₄ /kg dm)
$N_{LT,y}$	Annual average number of animals of type “LT” in year “y” (numbers)
$VS_{LT,y}$	Volatile solids for livestock “LT” entering the animal manure management system in year “y” (on a dry matter weight basis, kg dm/animal/year)
$MS\%_{i,y}$	Fraction of manure handled in system “i” in year “y”

(B) Emissions from flaring determinate as follows:**Equation B7**

$$PE_{\text{flare},y} = GWP_{\text{CH}_4} \times \sum_{m=1}^{525600} F_{\text{CH}_4,\text{RG},m} \times (1 - \eta_{\text{flare},m}) \times 10^{-3}$$

Where:

$PE_{\text{flare},y}$ Project emissions from flaring of the residual gas stream in year y, tCO₂e
 GWP_{CH_4} Global Warming Potential of methane valid for the commitment period, tCO₂e/tCH₄
 $F_{\text{CH}_4,\text{RG},m}$ Mass flow rate of methane in the residual gas in the hour h, kg/h
 $\eta_{\text{flare},h}$ Flare efficiency in the hour h

(C) Emissions from use of fossil fuels or electricity for the operation:

No fossil fuel or electricity will be used in the project, therefore, $PE_{\text{power},y} = \text{zero}$.

(D) Emissions from incremental transportation

No incremental transportation will occur in the project activity, and therefore, $PE_{\text{transp},y} = 0$

(E) Emissions from storage of the manure:

The manure will not be stored in the entire project. Each day all the manure is washed and sent to the digester, therefore, $PE_{\text{storage},y} = 0$.

Step 4: Leakage.

According with the methodology AMS.III.D version 20.1, the leakage should be determined by following the relevant procedure in the methodological tool "*Project and leakage emissions from anaerobic digesters*".

According with this tool, leakage emissions associated with the anaerobic digester ($LE_{\text{AD},y}$) depend on how the digestion is managed. Since the storage of digested or the composting of digested is occurring within the project boundary, these emissions were considered as part of the project emissions.

B.6.2. Data and parameters fixed ex ante

Data / Parameter	MCF _j
Unit	%
Description	Annual methane conversion factor for the baseline animal waste management system "j".
Source of data	Obtained from IPCC2006, vol 4, chapter 10, Tables 10.17.
Value(s) applied	79%
Choice of data or Measurement methods and procedures	Average temperature of southwest region, mainly where the project sites are located is 23 to 25 Celsius during the year, according to CPTEC/INPE/EMBRAPA http://satelite.cptec.inpe.br/PCD/
Purpose of data	Calculation of Baseline Emissions
Additional comment	

Data / Parameter	MS% _{BI,j}
Unit	Fraction
Description	Fraction of manure handled in baseline animal manure management system "j".
Source of data	Project proponents
Value(s) applied	1
Choice of data or Measurement methods and procedures	100% of the manure will be handled per category T, system S and climate region k.
Purpose of data	Calculation of Baseline Emissions
Additional comment	

Data / Parameter	$VS_{default}$
Unit	kg dry matter/animal/day
Description	Default value for the volatile solid excretion rate per day on a dry-matter basis for a defined livestock population
Source of data	Obtained from IPCC2006, vol 4, chapter 10, Tables 10A-7 and 10A-8.
Value(s) applied	0.3 for Market Swine (finishers, nursery/weaners, boars) 0.46 for Breeding Swine (gilts, sows)
Choice of data or Measurement methods and procedures	<p>Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association). http://www.abcs.org.br/</p> <p>The genetic source of production operation is originated from Annex I; The farm uses formulated feed rations optimized for the various stage of growth and animals category; The formulated feed rations can be validated through on farm record keeping; The project specific animal weights are more similar to developed country IPCC default values.</p> <p>Used of factors as defined in IPCC2006, chapter 10, volume 4, since that there is no national data for the default value for the volatile solid excretion rate per day on a dry-matter basis for a defined livestock population.</p>
Purpose of data	Calculation of Baseline Emissions

Additional comment	<p>The four conditions to apply VS value of developed countries are fully applicable to developed countries can be used provided the following four conditions are satisfied:</p> <ul style="list-style-type: none"> - <i>The genetic source of the livestock originates from an Annex I Party;</i> Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association) – http://www.abcs.org.br/. The genetic source of the livestock is therefore in compliance with this methodology requirement, which can be confirmed and verified by the genetic documents of the animals of each farm. These evidences were provided and assessed to assure their applicability to this requirement. - <i>The farm uses formulated feed rations (FFR) which are optimized for the various animal(s), stage of growth, category, weight gain/productivity and/or genetics;</i> The formulated feed rations are created according with the characteristics of the animals, their stage of growth, category, weight gain and genetics. Each farm possesses their FFR composition according with the type of animal(s) accommodated, which was confirmed and verified. These evidences were provided and assessed to assure their applicability this requirement. - <i>The use of FFR can be validated (through on-farm record keeping, feed supplier, etc.);</i> The formulated feed rations are part of the management system of the farms and therefore, each site possesses on-farm records which attest the FFR used. These evidences are also monitored on a monthly basis, according monitoring plan for the parameter FFR, as described in section B.7.1, and the PP internal procedure POP 14. - <i>The project specific animal weights are more similar to developed country IPCC default values.</i> The W_{site} value considered for each category of swine is the result of an average weight of the animals of all farms included in the project, and this value was applied in the baseline calculation. <p><i>Finishers</i> is the animal category that represents majority of all animals from the farms included in this PDD, around 62% of the total number of animals (only three farms have other types of animals but not as significant as finishers). Finishers are considered to be “market swine” and presented an average weight of 90kg among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (50 kg) – the values form Latin America (28 kg), where the project is located, is even lower than Western Europe’s.</p> <p>This situation is also observed for the remaining four categories of swine (nursery and boars for market swine, gilts and sows for breeding swine): the values are more similar to those adopted in Western Europe than in Latin America, especially regarding the Breeding Swine (gilts and sows) and in the Market Swine (boars) which presented an average weight of 210kg and 230 kg respectively, among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (198kg for Breeding Swine and 50 kg for Market Swine) – the values form Latin America (28kg for both classes of Breeding and Market Swine), where the project is located, is much lower than Western Europe’s. Only in the category nursery (also Market Swine), which roughly represents 28% of all animals from the farms included in this PDD, have an average weight of 20 kg, closer to the Latin America values than the Western Europe values.</p> <p>Therefore, is fair to consider that “<i>the project specific animal weights are more similar to developed country IPCC default values</i>” condition is fulfilled and that the VS adopted values for developed counties is in full compliance with the methodology requirements.</p>
--------------------	---

Data / Parameter	GWPC _{H₄}
Unit	tCO ₂ e/tCH ₄
Description	Global warming potential of CH ₄
Source of data	IPCC Fourth Assessment Report: Climate Change 2007
Value(s) applied	25
Choice of data or Measurement methods and procedures	Conversion factor for metric tons of CH ₄ to metric tons of CO ₂ equivalent.
Purpose of data	Calculation of Baseline Emissions and Project Emissions
Additional comment	

Data / Parameter	B _{0,LT}
Unit	m ³ CH ₄ /kg dm
Description	Maximum methane producing potential of the volatile solid generated for animal type "LT".
Source of data	IPCC 2006, Tables 10-A7 and 10-A8.
Value(s) applied	0.45
Choice of data or Measurement methods and procedures	<p>Default value according to IPCC 2006 in western Europe region. Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association). http://www.abcs.org.br/</p> <p>The genetic source of production operation is originated from Annex I; The farm uses formulated feed rations optimized for the various stage of growth and animals category; The formulated feed ratings can be validated through on farm record keeping; The project specific animal weights are more similar to developed country IPCC default values.</p> <p>Used of factors as defined in IPCC2006, chapter 10, volume 4, since that there is no national data for the Maximum methane producing potential of the volatile solid generated for animal type "LT"</p>
Purpose of data	Calculation of Baseline Emissions

Additional comment	<p>The four conditions to apply B0 value of developed countries are fully applicable to developed countries can be used provided the following four conditions are satisfied:</p> <ul style="list-style-type: none"> - <i>The genetic source of the livestock originates from an Annex I Party;</i> Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association) – http://www.abcs.org.br/. The genetic source of the livestock is therefore in compliance with this methodology requirement, which can be confirmed and verified by the genetic documents of the animals of each farm. These evidences were provided and assessed to assure their applicability to this requirement. - <i>The farm uses formulated feed rations (FFR) which are optimized for the various animal(s), stage of growth, category, weight gain/productivity and/or genetics;</i> The formulated feed rations are created according with the characteristics of the animals, their stage of growth, category, weight gain and genetics. Each farm possesses their FFR composition according with the type of animal(s) accommodated, which was confirmed and verified. These evidences were provided and assessed to assure their applicability this requirement. - <i>The use of FFR can be validated (through on-farm record keeping, feed supplier, etc.);</i> The formulated feed rations are part of the management system of the farms and therefore, each site possesses on-farm records which attest the FFR used. These evidences are also monitored on a monthly basis, according monitoring plan for the parameter FFR, as described in section B.7.1, and the PP internal procedure POP 14. - <i>The project specific animal weights are more similar to developed country IPCC default values.</i> The W_{site} value considered for each category of swine is the result of an average weight of the animals of all farms included in the project, and this value was applied in the baseline calculation. <p><i>Finishers</i> is the animal category that represents majority of all animals from the farms included in this PDD, around 62% of the total number of animals (only three farms have other types of animals but not as significant as finishers). Finishers are considered to be “market swine” and presented an average weight of 90kg among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (50 kg) – the values form Latin America (28 kg), where the project is located, is even lower than Western Europe’s.</p> <p>This situation is also observed for the remaining four categories of swine (nursery and boars for market swine, gilts and sows for breeding swine): the values are more similar to those adopted in Western Europe than in Latin America, especially regarding the Breeding Swine (gilts and sows) and in the Market Swine (boars) which presented an average weight of 210kg and 230 kg respectively, among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (198kg for Breeding Swine and 50 kg for Market Swine) – the values form Latin America (28kg for both classes of Breeding and Market Swine), where the project is located, is much lower than Western Europe’s. Only in the category nursery (also Market Swine), which roughly represents 28% of all animals from the farms included in this PDD, have an average weight of 20 kg, closer to the Latin America values than the Western Europe values.</p> <p>Therefore, is fair to consider that “<i>the project specific animal weights are more similar to developed country IPCC default values</i>” condition is fulfilled and that the VS adopted values for developed counties is in full compliance with the methodology requirements.</p>
--------------------	---

Data / Parameter	W_{default}
Unit	kg
Description	Default average animal weight of a defined population at the project site.
Source of data	IPCC 2006, Tables 10-A7 and 10-A8.
Value(s) applied	Sows (breeding swine): 198 kg Finishers (market swine): 50 kg Nursery (market swine): 50 kg Boars (market swine): 50 kg Gilts (breeding swine): 198 kg
Choice of data or Measurement methods and procedures	<p>Default value according to IPCC 2006 in western Europe region. Genetics and nutrition adopted for these farms as so as in Western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association).</p> <p>http://www.abcs.org.br/</p> <p>The genetic source of production operation is originated from Annex I; The farm uses formulated feed rations optimized for the various stage of growth and animals category; The formulated feed ratings can be validated through on farm record keeping; The project specific animal weights are more similar to developed country IPCC default values.</p> <p>Used of factors as defined in IPCC2006, chapter 10, volume 4, since that there is no national data for the default average animal weight of a defined population at the project site.</p>
Purpose of data	Calculation of Baseline Emissions

Additional comment	<p>The four conditions to apply W_{default} value of developed countries are fully applicable to developed countries can be used provided the following four conditions are satisfied:</p> <ul style="list-style-type: none"> - <i>The genetic source of the livestock originates from an Annex I Party;</i> Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association) – http://www.abcs.org.br/. The genetic source of the livestock is therefore in compliance with this methodology requirement, which can be confirmed and verified by the genetic documents of the animals of each farm. These evidences were provided and assessed to assure their applicability to this requirement. - <i>The farm uses formulated feed rations (FFR) which are optimized for the various animal(s), stage of growth, category, weight gain/productivity and/or genetics;</i> The formulated feed rations are created according with the characteristics of the animals, their stage of growth, category, weight gain and genetics. Each farm possesses their FFR composition according with the type of animal(s) accommodated, which was confirmed and verified. These evidences were provided and assessed to assure their applicability this requirement. - <i>The use of FFR can be validated (through on-farm record keeping, feed supplier, etc.);</i> The formulated feed rations are part of the management system of the farms and therefore, each site possesses on-farm records which attest the FFR used. These evidences are also monitored on a monthly basis, according monitoring plan for the parameter FFR, as described in section B.7.1, and the PP internal procedure POP 14. - <i>The project specific animal weights are more similar to developed country IPCC default values.</i> The W_{site} value considered for each category of swine is the result of an average weight of the animals of all farms included in the project, and this value was applied in the baseline calculation. <p><i>Finishers</i> is the animal category that represents majority of all animals from the farms included in this PDD, around 62% of the total number of animals (only three farms have other types of animals but not as significant as finishers). Finishers are considered to be “market swine” and presented an average weight of 90kg among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (50 kg) – the values form Latin America (28 kg), where the project is located, is even lower than Western Europe’s.</p> <p>This situation is also observed for the remaining four categories of swine (nursery and boars for market swine, gilts and sows for breeding swine): the values are more similar to those adopted in Western Europe than in Latin America, especially regarding the Breeding Swine (gilts and sows) and in the Market Swine (boars) which presented an average weight of 210kg and 230 kg respectively, among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (198kg for Breeding Swine and 50 kg for Market Swine) – the values form Latin America (28kg for both classes of Breeding and Market Swine), where the project is located, is much lower than Western Europe’s. Only in the category nursery (also Market Swine), which roughly represents 28% of all animals from the farms included in this PDD, have an average weight of 20 kg, closer to the Latin America values than the Western Europe values.</p> <p>Therefore, is fair to consider that “<i>the project specific animal weights are more similar to developed country IPCC default values</i>” condition is fulfilled and that the VS adopted values for developed counties is in full compliance with the methodology requirements.</p>
--------------------	---

Data / Parameter	UF _b
Unit	Fraction
Description	Model correction factor to account for model uncertainties
Source of data	FCCC/SBSTA/2003/10/Add.2, page 25.
Value(s) applied	0.94
Choice of data or Measurement methods and procedures	Default value according to methodology AMS-III.D
Purpose of data	Calculation of Baseline Emissions
Additional comment	

B.6.3. Ex ante calculation of emission reductions

(i) According to the baseline description in the section B.4, the results from the equations are summarized in the following table B3:

Table B3 – Baseline emissions for the second CP renewal year – 2017

D	Farm/Site	Baseline Emissions per Annual Average Number of Animals Type "LT", in t CO ₂ e/year					Total
		Sows	Finishers	Nursery/Weaners	Boars	Gilts	
1	Sítio Santa Cruz	731	8,826	827	735	13	11,132
2	Faz. Esmeralda	522	3,861	596	735	10	5,724
3	Fazenda São Carlos	1,566	12,136	1,986	1,765	15	17,468
4	Fazenda Sta Elisa - Site 1	313	2,979	364	294	9	3,959
5	Fazenda Sta Elisa - Site 2	627	5,296	728	477	11	7,139
6	Agropecuária Sítio Herlu	-	2,206	-	-	-	2,206
7	Sítio Santo Antonio - Site 1	731	3,530	993	144	14	5,412
8	Granja Lajeado	501	3,264	544	147	6	4,462
9	Faz. São José Nápoles	1,566	11,032	1,754	1,324	30	15,706
10	Sítio Santo Antonio - Site 2	-	4,192	-	-	-	4,192
TOTAL		6,577	57,322	7,792	5,621	108	77,400

Table B4 – Total baseline emission per year

ID	Farm/Site	Baseline Emissions per year, in t CO ₂ e / year							Total
		2017	2018	2019	2020	2021	2022	2023	
1	Sítio Santa Cruz	11,132	11,132	11,132	11,132	11,132	11,132	11,132	77,924
2	Faz. Esmeralda	5,724	5,724	5,724	5,724	5,724	5,724	5,724	40,068
3	Fazenda São Carlos	17,468	17,468	17,468	17,468	17,468	17,468	17,468	122,276
4	Fazenda Sta Elisa - Site 1	3,959	3,959	3,959	3,959	3,959	3,959	3,959	27,713
5	Fazenda Sta Elisa - Site 2	7,139	7,139	7,139	7,139	7,139	7,139	7,139	49,973
6	Agropecuária Sítio Herlu	2,206	2,206	2,206	2,206	2,206	2,206	2,206	15,442
7	Sítio Santo Antonio - Site 1	5,412	5,412	5,412	5,412	5,412	5,412	5,412	37,884
8	Granja Lajeado	4,462	4,462	4,462	4,462	4,462	4,462	4,462	31,234
9	Faz. São José Nápoles	15,706	15,706	15,706	15,706	15,706	15,706	15,706	109,942
10	Sítio Santo Antonio - Site 2	4,192	4,192	4,192	4,192	4,192	4,192	4,192	29,344
Total baseline emission per year		77,400	77,400	77,400	77,400	77,400	77,400	77,400	77,400
Total baseline emissions in 7 years, in tonnes CO ₂ e									

(ii) According to the project emissions description in the section B.6 and equation B5:

Table B5 – Total project activity emissions for the first CP renewal year – 2017

ID	Farm/Site	Project Emissions per Annual Average Number of Animals Type "LT", in t CO ₂ e/year					Total
		Sows	Finishers	Nursery/Weaners	Boars	Gilts	
1	Sítio Santa Cruz	171	2,072	194	173	3	2,613
2	Faz. Esmeralda	122	906	140	173	2	1,343
3	Fazenda São Carlos	368	2,848	466	415	4	4,101
4	Fazenda Sta Elisa - Site 1	73	699	85	69	2	928
5	Fazenda Sta Elisa - Site 2	147	1,243	171	112	2	1,675
6	Agropecuária Sítio Herlu	-	518	-	-	-	518
7	Sítio Santo Antonio - Site 1	171	828	233	33	3	1,268
8	Granja Lajeado	117	766	127	35	2	1,047
9	Faz. São José Nápoles	368	2,589	411	310	7	3,685
10	Sítio Santo Antonio - Site 2	-	984	-	-	-	984
TOTAL		1,537	13,453	1,827	1,320	25	18,162

Table B6 – Total project activity emissions per year

Table 26 - Total project activity emissions per year									
ID	Farm Name/Site	Project Activity Emissions in t CO ₂ e / year							Total
		2017	2018	2019	2020	2021	2022	2023	
1	Sítio Santa Cruz	2,613	2,613	2,613	2,613	2,613	2,613	2,613	18,291
2	Faz. Esmeralda	1,343	1,343	1,343	1,343	1,343	1,343	1,343	9,401
3	Fazenda São Carlos	4,101	4,101	4,101	4,101	4,101	4,101	4,101	28,707
4	Fazenda Sta Elisa - Site 1	928	928	928	928	928	928	928	6,496
5	Fazenda Sta Elisa - Site 2	1,675	1,675	1,675	1,675	1,675	1,675	1,675	11,725
6	Agropecuária Sítio Herlu	518	518	518	518	518	518	518	3,626
7	Sítio Santo Antonio - Site 1	1,268	1,268	1,268	1,268	1,268	1,268	1,268	8,876
8	Granja Lajeado	1,047	1,047	1,047	1,047	1,047	1,047	1,047	7,329
9	Faz. São José Nápoles	3,685	3,685	3,685	3,685	3,685	3,685	3,685	25,795
10	Sítio Santo Antonio - Site 2	984	984	984	984	984	984	984	6,888
Total project activity emissions per year		18,162	18,162	18,162	18,162	18,162	18,162	18,162	127,134
Total project activity emissions in 7 years, in t CO ₂ e/year									

(iii) According to the project emissions reduction in the section B.6, the results of the estimation of the emissions reduction, equation B4 are summarized in the following table B7:

Table B7 – Total Emission Reductions

Description	Year						
	2017	2018	2019	2020	2021	2022	2023
Total Baseline Emissions - BE _y , in t CO ₂ e/year	77,400	77,400	77,400	77,400	77,400	77,400	77,400
Total Project Emissions - PE _y , in t CO ₂ e/year	18,162	18,162	18,162	18,162	18,162	18,162	18,162
Total Emission Reductions - ER _y = BE _y – PE _y (in t CO ₂ e/year)	59,238	59,238	59,238	59,238	59,238	59,238	59,238

B.6.4. Summary of ex ante estimates of emission reductions

Year	Baseline emissions (t CO ₂ e)	Project emissions (t CO ₂ e)	Leakage (t CO ₂ e)	Emission reductions (t CO ₂ e)
2017	77,400	18,162	0	59,238
2018	77,400	18,162	0	59,238
2019	77,400	18,162	0	59,238
2020	77,400	18,162	0	59,238
2021	77,400	18,162	0	59,238
2022	77,400	18,162	0	59,238
2023	77,400	18,162	0	59,238
Total	541,800	127,134	0	414,666
Total number of crediting years	7 years			
Annual average over the crediting period	77,400	18,162	0	59,238

B.7. Monitoring plan

The methodology applied to this project activity is AMS-III.D./version 20.1, ***Methane recovery in animal manure management systems***. If in the future an electricity generator for in site electricity supply is installed, methodology AMS-III.H /version 18.0, ***Methane recovery in wastewater treatment***, will also be applied. The simplified monitoring methodologies are applicable to this project activity because they provide a method to accurately measure and record the GHG emissions that will be captured and combusted by the project activity.

Each individual farm will be monitored independently according with the parameters described in the following section B.7.1 and monitored according with the monitoring plan described in the section B.7.3.

All data monitored and required for verification and issuance is kept for a minimum of two years after the end of the crediting period or the last issuance of CERs for this project activity, whichever occurs later. All parameters are deeply controlled by operational procedures developed by Brascarbon. A list and the procedures contained in the Brascarbon Operational Procedures Manual are mentioned in the PDD in the Appendix 5.

Brascarbon trained several regional technicians who will be responsible for the maintenance and the monitoring system based in ISO 9000 (Brascarbon Operational Procedure Manual).

B.7.1. Data and parameters to be monitored

Data / Parameter	T_f
Unit	°C
Description	Combustion temperature of the flare
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Every 1 minute measurement and registration by a Control Logic Program (CLP) According to the Monitoring Operational Procedure POP-01
Monitoring frequency	Every 1 minute measurement and registration by the PLC. Data is collected monthly from the field by the use of the pen drive.
QA/QC procedures	Check the data for more accurate information.
Purpose of data	Calculation of Baseline Emissions and Project Emissions
Additional comment	Monitoring operational procedure POP-01 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	W_{site}
Unit	kg
Description	Average animal weight of a defined livestock population at the project site in year
Source of data	The data collection is realized quarterly by each farm owner and provided to the PP. The farm owners are responsible for the assurance of all the logistics associated with the swine production, providing the animal nutrition, genetics and all the overall animal weight.
Value(s) applied	Sows: 220 kg Finishers: 90 kg Nursery: 20 kg Boars: 240 kg Gilts: 220 kg
Measurement methods and procedures	The quarterly weight of the animals for each producer of the PDD is made following their internal procedures, that is not under the PP's control – the association selects the animals based on a random sampling approach applied in each category, since it is infeasible to weight each animal individually in the farms belonging to the project (these farms can more than 5,000 animals each). In addition, each project site presents the actual animal weight by using Brascarbon form 16.001 after a cross-check by the PP, using the real information after each batch of animals exits each farm; the template was designed to quarterly report animal weight per category.
Monitoring frequency	Quarterly (based on sampling following each farm internal procedures) and at full weight of the batch of pigs every time it leaves the farms (each batch stays around 5 to 6 months per farm).
QA/QC procedures	<p>Check of the site records and documents. The values of the quarterly weights presented by each producer (following their own internal procedures) to the PP are cross-checked against two different credible sources:</p> <ul style="list-style-type: none"> - reference figures from EMBRAPA (an undisputed Brazilian Agricultural Research Corporation nationally recognized for these scope) for each category; and - the figures provided by each farm owner when each of the swine batches exits each farm (each batch stays around 5 to 6 months per farm), as explained below. The producers provide invoices with 100% of the animals weight (and number), allowing a full cross-check with the weight values provided and assuring that all the information is accurate. <p>If the PP verifies during the cross-check any discrepancy between the values provided quarterly and the full weighting and counting of the animals in the invoices provided by the swine producers each time any batch exits a giving farm, those values will be updated accordingly with these real figures.</p>
Purpose of data	Calculation of Baseline Emissions and Project Emissions

Additional comment	<p>The current practice of swine farms in Brazil is that each farm receives new batches of animals every 5 to 6 months (which is also the average time that a batch stays in a farm) and each producer performs regular and periodical visits to each farm in order to assess and evaluate the correct development of each batch in terms of growing/weighting of the animals (according with what is expected at each growing stage of a given batch). It is important to highlight that the farm owners rely on the quality of the values measured since their sole professional occupation is the pig production and, therefore, it is within their best interests to have a correct and reliable way to assess the weighting of the animals (which is their business) based on their experience and internal procedures.</p> <p>Every 5 to 6 months (depending on each batch and farm), the animal batches leave the farms and they are, in this specific situation, 100% weighted by the producers – this weighting is undertaken to the totality of animal presented in the batch since the profits associated with the animal production are weight based. According with the swine producers, a possible range of +/- 5kg within the animal growing is considered a normal fluctuation and therefore admissible.</p> <p>Each time a batch exits a farm, each farm owner provides the invoices to attest the feasibility of the figures adopted, allowing a complete and thorough cross-check by PP of all the data used for this parameter.</p> <p>Monitoring operational procedure POP-016</p>
--------------------	---

Data / Parameter	SITE INSPECTION
Unit	N/A
Description	Inspection on the site considering relevant regulation and the infra-structure of the site
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Annual follow-up of the documentation to check the expiration date, changes in the production lay-out and surroundings of the digester. Actions within the property and around the biodigesters should be taken both by the contractor and the client Brascarbon. Photos should be attached to the annual inspection report to prove that the system of wastewater management has not changed namely regarding the following items: pipes, gutters, roofs, fences, trees, control panel, flare, terminal boxes and general cleaning. Use of the annex attached at the operational procedure POP-02
Monitoring frequency	Annually
QA/QC procedures	A copy of the documents is submitted to the central office to the Quality Coordinator, who will verify the data, controlling it through an electronic system and ensuring its integrity.
Purpose of data	N/A
Additional comment	Monitoring operational procedure POP-02 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	$N_{LT,y}$
Unit	Number
Description	Annual average number of animals of type "LT" in year "y"
Source of data	Brascarbon Monitoring Report System
Value(s) applied	See table B.2
Measurement methods and procedures	Checking of the documentation located at the confined animal production and use of the table annexed at the operational procedure POP-03. Use of the Equation B3 established in the section B4 step 2 item B – determination of the annual average number of animals.
Monitoring frequency	Monthly
QA/QC procedures	Information is cross-checked with the documents available at the confined feed operation including, when available, animal purchase and sale records or information on food purchase records.
Purpose of data	Calculation of Baseline Emissions
Additional comment	Monitoring operational procedure POP-03 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	BG burnt,y
Unit	m ³
Description	Biogas flared or used as a fuel in the year y.
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Minute by minute measurement and cumulative registration by a Control Logic Program (CLP). Monthly the registered data will be recovered in the data logger (CLP) of the volume in the local control panel according to the operational procedure POP-04
Monitoring frequency	Continuously recording. Every 1 minute measurement and registration by the PLC. Data is collected monthly from the field.
QA/QC procedures	Check the monthly registers sent from the field to proceed with the emissions reductions calculation. The registers are read and stored every minute continuously in the CLP. The data is recovered from the CLP every month. The QA/QC also controls and assures the calibration program of the flow meter.
Purpose of data	Calculation of Baseline Emissions
Additional comment	Monitoring operational procedure POP-04 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	WCH _{4,y}
Unit	Fraction
Description	Methane content in biogas in the year “y”
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Use of methane concentration analysis instrument on dry basis in the sampling point at piping to the flare.
Monitoring frequency	<p>Periodical. To assure. that the monitoring frequency provides a 90% confidence level and 10% precision. The adequate frequency will be determined through a statistical analysis of the methane fraction variation, based on methane fraction data gathered on a group of farms per region during a certain period time.</p> <p>According with the data/parameter table 6 of the methodology AMS III.D version 20.1, The fraction of methane in the biogas should be measured with a continuous analyser (values are recorded with the same frequency as the flow) or, with periodical measurements at a 90/10 confidence/precision level by following General guidelines for sampling and surveys for SSC project activities, or, alternatively a default value of 60% methane content can be used The option chosen was periodical measurements at a 90/10 confidence/precision level. For details, please see Section B.7.2 – Sampling Plan.</p>
QA/QC procedures	Check the registers in the generated documents. Control and assure the calibration program of the instrument.
Purpose of data	Calculation of Baseline Emissions
Additional comment	<p>Monitoring frequency to be determined to attend 90% confidence level and 10% precision. To assure that the monitoring frequency provides a 90% confidence level and 10% precision, the adequate frequency will be determined through a statistical analysis of the methane fraction variation, based on methane fraction data gathered on a group of farms per region during a certain period time. The results will be analyzed to guarantee that the required confidence/precision level has been met and the monitoring frequency will be, at least, monthly. For details, please see Section B.7.2 – Sampling Plan.</p> <p>The equipment used can directly measure methane content in the biogas. The methane content measurement will be carried out close to a location in the system where a biogas flow measurement takes place, and on the same basis (wet or dry) as required by the methodology.</p> <p>Monitoring operational procedure POP-05 can be found at the Brascarbon Operational Procedure Manual</p>

Data / Parameter	T _{biogas}
Unit	°C
Description	Temperature of the biogas at operation conditions
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Measurement with a local thermometer, with the same equipment as the methane content and at the same time, in the sampling point at piping to the flare. Measurement according with Operational Procedure POP-06.
Monitoring frequency	<p>Periodical. To assure. that the monitoring frequency provides a 90% confidence level and 10% precision. The adequate frequency will be determined through a statistical analysis of the temperature variation, based on temperature data gathered on a group of farms per region during a certain period time.</p> <p>According to the data/parameter table 6 of the methodology AMS III.D version 20.1 when the temperature of the biogas at the flow measurement site is not measured by a continuous analyser, the frequency of periodical measurements at a 90/10 statistical confidence/precision level shall be determined following the "Standard for sampling and surveys for CDM project activities and programme of activities". The minimum sample size required would be dependent on the variability in the values of temperature, which will be determined in the sampling plan. For details, please see Section B.7.2 – Sampling Plan.</p>
QA/QC procedures	Check the registers in the generated documents and thermometer calibration
Purpose of data	Calculation of Baseline Emissions
Additional comment	<p>Monitoring frequency to be determined to attend 90% confidence level and 10% precision. To assure that the monitoring frequency provides a 90% confidence level and 10% precision, the adequate frequency will be determined through a statistical analysis of the temperature variation, based on temperature data gathered on a group of farms per region during a certain period time. The results will be analyzed to guarantee that the required confidence/precision level has been met and the monitoring frequency will be, at least, monthly. For details, please see Section B.7.2 – Sampling Plan.</p> <p>Monitoring operational procedure POP-06 can be found at the Brascarbon Operational Procedure Manual</p>

Data / Parameter	$D_{CH_4,y}$
Unit	t/m^3
Description	Density of the methane combusted
Source of data	Brascarbon Monitoring Report System
Value(s) applied	0.00067
Measurement methods and procedures	Calculation according to the Operational Procedure POP-07. Use of the formula considering pressure, temperature and molecular mass of methane
Monitoring frequency	Monthly
QA/QC procedures	Check and approve the density value calculation.
Purpose of data	Calculation of Baseline Emissions
Additional comment	Monitoring operational procedure POP-07 can be found at the Brascarbon Operational Procedure Manual. Reference: Annex 13-Tool to determine project emissions from flaring gases containing methane.

Data / Parameter	Q_{DM}
Unit	N/A
Description	Sludge soil application
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Supervision in the field
Monitoring frequency	Defined according to the digester performance
QA/QC procedures	Check the registers in the generated documents.
Purpose of data	N/A
Additional comment	Monitoring operational procedure POP-09 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	FE or $\eta_{flare, h}$
Unit	%
Description	Enclosed Flare Efficiency
Source of data	Brascarbon Monitoring Report System
Value(s) applied	.N/A.
Measurement methods and procedures	<p>Enclosed flare is used in the entire project.</p> <p>According with the of version 02 of the tool Project emissions from flaring, in its step 2 – Determination of flare efficiency, for determining the efficiency of combustion of enclosed flares there is the option to apply a default value or determine the efficiency based on monitored data.</p> <p>In the case of enclosed flares, project participants may choose between two options to determine the flare efficiency for minute m ($\eta_{flare, m}$). The PP has chosen Option A – Apply a default value for flare efficiency.</p> <p>The flare efficiency for the minute m ($\eta_{flare, m}$) is 90% when the following two conditions are met to demonstrate that the flare is operating:</p> <ol style="list-style-type: none"> (1) The temperature of the flare ($T_{EG, m}$) and the flow rate of the residual gas to the flare ($F_{RG, m}$) is within the manufacturer's specification for the flare ($SPEC_{flare}$) in minute m; and (2) The flame is detected in minute m ($Flame_m$). <p>Otherwise $\eta_{flare, m}$ is 0%.</p> <p>Brascarbon considers 90% efficiency for the hour with all temperature measurements above or equal to 500° Celsius and with the parameters of flare operation met, and 0% efficiency for the hour with any temperature measurement below 500° Celsius.</p> <p>All data and parameters that are required to monitor whether the flare operates within the range of operating conditions according to manufacturer's specifications will be continuously monitored. The temperature and biogas flow rate will be monitored minute by minute by a sensor installed in the enclosed flare and are registered by a CLP. The data stored in the CLP is recovered monthly by the use of a pendrive and the file containing the information will be sent to the QA/QC officer to manage the information.</p> <p>Brascarbon developed the formulary 08.001 in the operational procedure to monitor the hourly flare efficiency according to the criteria above mentioned (temperature and parameters of flare operation).</p>
Monitoring frequency	Monthly. Every 1 minute measurement and registration by a CLP of flare temperature and biogas flow rate. Data is recovered monthly for Flare Efficiency hourly calculation
QA/QC procedures	<p>Check the registers in the generated documents.</p> <p>The enclosed flare will regularly undergo a maintenance process subject to the appropriate industrial standards and/or manufacturer's specifications in order to ensure measurement accuracy.</p> <p>The Monitoring Operational Procedure POP-08 was developed to calculate the flare efficiency and it can be found at the Brascarbon Operational Procedure Manual.</p>
Purpose of data	Calculation of Baseline Emissions and Project Emissions
Additional comment	The Monitoring Operational Procedure POP-08 was developed to calculate the monthly efficiency and it can be found at the Brascarbon Operational Procedure Manual.

Data / Parameter	ER _{y,ex-post}
Unit	t CO ₂ e
Description	Ex-post emission reductions achieved by the project activity based on monitored values for the year “y”.
Source of data	Brascarbon Monitoring Report System
Value(s) applied	59,238
Measurement methods and procedures	Comparison of the baseline with the actual measured data according to the operational procedure POP-17. The minimum value between the BE _{ex-post} and MD _y will be chosen for the calculation of the ER _{y ex-post} .
Monitoring frequency	Yearly
QA/QC procedures	Check the ER calculation and the registers in the generated documents.
Purpose of data	N/A
Additional comment	Used to cap the maximal emission reduction in any year. Monitoring operational procedure POP-17 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	FFR
Unit	N/A
Description	Formulated Feed Rations
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	According to the Operational Procedure POP-14
Monitoring frequency	Monthly
QA/QC procedures	Check the registers and/or food purchases records on the farm.
Purpose of data	Calculation of Baseline Emissions (to validate B0 and VS values used)
Additional comment	Monitoring operational procedure POP-14 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	P _{biogas}
Unit	mbar
Description	Pressure of the biogas at operation conditions
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Measurement with portable local pressure gauge, with the same equipment as the methane content and at the same time, in the sampling point at piping to the flare. Measurement according with Operational Procedure POP-13.
Monitoring frequency	<p>Periodical. To assure. that the monitoring frequency provides a 90% confidence level and 10% precision. The adequate frequency will be determined through a statistical analysis of the pressure variation, based on pressure data gathered on a group of farms per region during a certain period time.</p> <p>According to the data/parameter table 6 of the methodology AMS III.D version 20.1, the pressure of the biogas at the flow measurement site is not measured by a continuous analyser, the frequency of periodical measurements at a 90/10 statistical confidence/precision level shall be determined following the “Standard for sampling and surveys for CDM project activities and programme of activities”. The minimum sample size required would be dependent on the variability in the values of pressure, which will be determined in the sampling plan. For details, please see Section B.7.2 – Sampling Plan.</p>
QA/QC procedures	Check the registers in the generated documents and equipment for measurement calibration
Purpose of data	Calculation of Baseline Emissions
Additional comment	<p>Monitoring frequency to be determined to attend 90% confidence level and 10% precision. To assure that the monitoring frequency provides a 90% confidence level and 10% precision, the adequate frequency will be determined through a statistical analysis of the pressure variation, based on pressure data gathered on a group of farms per region during a certain period time. The results will be analyzed to guarantee that the required confidence/precision level has been met and the monitoring frequency will be, at least, monthly. For details, please see Section B.7.2 – Sampling Plan.</p> <p>Monitoring operational procedure POP-13 can be found at the Brascarbon Operational Procedure Manual</p>

Data / Parameter	GENETIC SOURCE
Unit	N/A
Description	Genetic source from annex I party
Source of data	Brascarbon Monitoring Report System
Value(s) applied	Western Europe
Measurement methods and procedures	Data and records from the confined feed animal operation. According Operational Procedure POP-15
Monitoring frequency	Annually
QA/QC procedures	Check data and records from the farm operation
Purpose of data	Calculation of Baseline Emissions (to validate Bo and VS values used)
Additional comment	Monitoring operational procedure POP-15 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	MS% _{i,y}
Unit	Fraction
Description	Fraction of manure handled in project emissions in system “i”, year “y”.
Source of data	Brascarbon Monitoring Report System
Value(s) applied	1
Measurement methods and procedures	During the site inspection, checking if changes in the adopted waste management system and surroundings of the digester was modified from the original proposal project activity. Use of the annex attached at the operational procedure POP-02
Monitoring frequency	Annually
QA/QC procedures	A copy of the documents is submitted to the central office to the Quality Coordinator, who will verify the data, controlling it through an electronic system and ensuring its integrity.
Purpose of data	Calculation of Project Emissions
Additional comment	Monitoring operational procedure POP-02 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	FV _{RG,h}
Unit	m ³ /h
Description	Volumetric flow rate of the residual gas in dry basis at normal conditions in hour h
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	This parameter and the parameter BG _{burnt,y} are the same. Please refer to the measurement methods and procedures from the parameter “BG _{burnt,y} ”
Monitoring frequency	This parameter and the parameter BG _{burnt,y} are the same. Please refer to the monitoring frequency from the parameter “BG _{burnt,y} ”
QA/QC procedures	This parameter and the parameter BG _{burnt,y} are the same. Please refer to the QA/QC procedures from the parameter “BG _{burnt,y} ”
Purpose of data	Calculation of Project Emissions
Additional comment	This parameter and the parameter BG _{burnt,y} are the same. Please refer to the additional comments from the parameter “BG _{burnt,y} ”

Data / Parameter	$F_{CH_4, m}$
Unit	kg
Description	Mass flow rate of methane in the residual gaseous stream in the minute m,
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	<p>To be calculated according to the “Tool to determine project emissions from flaring gases containing methane”. An operational procedure POP 17 includes the instruction to the calculation.</p> <p>According with the step 1 – Determination of the methane mass flow in the residual gas of this tool, this parameter should be determined using another tool, namely <i>Tool to determine the mass flow of a greenhouse gas in a gaseous stream</i>. In second tool, there are several options to determine the Mass flow rate of methane in the residual gaseous stream. Option 2 - Simplified calculation without measurement of the moisture content was chosen by the PP.</p> <p>Within this option, option A will be applicable by the demonstration that the gaseous stream is dry. The PP will demonstrate that the temperature of the gaseous stream (T_t) is less than 60°C (333.15 K) at the flow measurement point.</p> <p>Hence this parameter will be calculated according with Equations 5 and 6 of the tool. This means:</p> $F_{i,t} = V_{t,db} \times v_{i,t,db} \times \rho_{i,t} \quad \text{Equation (5)}$ <p>With:</p> $\rho_{i,t} = \frac{P_t \times MM_i}{R_u \times T_t} \quad \text{Equation (6)}$ <p>Where:</p> <ul style="list-style-type: none"> $F_{i,t}$ = Mass flow of greenhouse gas i in the gaseous stream in time interval t (kg gas/h) $V_{t,db}$ = Volumetric flow of the gaseous stream in time interval t on a dry basis (m³ dry gas/h) $v_{i,t,db}$ = Volumetric fraction of greenhouse gas i in the gaseous stream in a time interval t on a dry basis (m³ gas i/m³ dry gas) $\rho_{i,t}$ = Density of greenhouse gas i in the gaseous stream in time interval t (kg gas i/m³ gas i) P_t = Absolute pressure of the gaseous stream in time interval t (Pa) MM_i = Molecular mass of greenhouse gas i (kg/kmol) R_u = Universal ideal gases constant (Pa.m³/kmol.K) T_t = Temperature of the gaseous stream in time interval t (K)
Monitoring frequency	Monthly
QA/QC procedures	Check the registers sent from the field. Calculation of the parameter according to the procedures mentioned above.
Purpose of data	Calculation of Project Emissions
Additional comment	Monitoring operational procedure POP-17 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	$f_{VCH4,RG}$
Unit	Fraction
Description	Volumetric fraction of methane content in the residual gas on hour h
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	This parameter and the parameter $W_{CH4,y}$ are the same. Please refer to the Measurement methods and procedures from the parameter " $W_{CH4,y}$ "
Monitoring frequency	This parameter and the parameter $W_{CH4,y}$ are the same. Please refer to the monitoring frequency from the parameter " $W_{CH4,y}$ "
QA/QC procedures	This parameter and the parameter $W_{CH4,y}$ are the same. Please refer to the QA/QC procedures from the parameter " $W_{CH4,y}$ "
Purpose of data	Calculation of Project Emissions
Additional comment	This parameter and the parameter $W_{CH4,y}$ are the same. Please refer to the additional comments from the parameter " $W_{CH4,y}$ "

Data / Parameter	$N_{da,y}$
Unit	Number
Description	Number of days animal is alive in the farm, in year "y"
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Checking of the documentation located at the confined animal production and use of the operational procedure POP-03
Monitoring frequency	Monthly
QA/QC procedures	Information is cross-checked with the documents available at the confined feed operation including, when available, animal purchase and sale records or information on food purchase records.
Purpose of data	Calculation of Baseline Emissions
Additional comment	Monitoring operational procedure POP-03 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	$N_{p,y}$
Unit	Number
Description	Number of animals produced annually of type "LT" in year "y"
Source of data	Brascarbon Monitoring Report System
Value(s) applied	N/A
Measurement methods and procedures	Checking of the documentation located at the confined animal production and use of the table annexed at the operational procedure POP-03
Monitoring frequency	Annually
QA/QC procedures	Information is cross-checked with the documents available at the confined feed operation including, when available, animal purchase and sale records or information on food purchase records.
Purpose of data	Calculation of Baseline Emissions
Additional comment	Monitoring operational procedure POP-03 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	<i>nd_y</i>
Unit	Number
Description	Number of days in year “y” where the treatment plant was operational
Source of data	Brascarbon Monitoring Report System
Value(s) applied	365
Measurement methods and procedures	The number of days the animal manure management system is operational can be determined by the POP 24 – days of functioning, where it is monitored the number of days in a year “y” that the treatment plant has operated. According to the operational procedure POP-24
Monitoring frequency	Monthly
QA/QC procedures	The documentation should be sent to the central office to the Quality Coordinator, who will verify the data, controlling and ensuring its integrity.
Purpose of data	Calculation of Baseline Emissions
Additional comment	Monitoring operational procedure POP-24 can be found at the Brascarbon Operational Procedure Manual

Data / Parameter	$VS_{LT,y}$
Unit	kg dry matter/animal/year
Description	Volatile solids for livestock LT entering the animal manure management system in year y
Source of data	Brascarbon Monitoring Report System
Measurement methods and procedures	N/A
Monitoring frequency	Annually
QA/QC procedures	Check the registers in the generated documents. Control and assure the correct calculation of the parameter.
Purpose of data	Calculation of Baseline Emissions

Additional comment	<p>The four conditions to apply B0 value of developed countries are fully applicable to developed countries can be used provided the following four conditions are satisfied:</p> <ul style="list-style-type: none"> - <i>The genetic source of the livestock originates from an Annex I Party;</i> <p>Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association) – http://www.abcs.org.br/.</p> <p>The genetic source of the livestock is therefore in compliance with this methodology requirement, which can be confirmed and verified by the genetic documents of the animals of each farm. These evidences were provided and assessed to assure their applicability to this requirement.</p> <ul style="list-style-type: none"> - <i>The farm uses formulated feed rations (FFR) which are optimized for the various animal(s), stage of growth, category, weight gain/productivity and/or genetics;</i> <p>The formulated feed rations are created according with the characteristics of the animals, their stage of growth, category, weight gain and genetics. Each farm possesses their FFR composition according with the type of animal(s) accommodated, which was confirmed and verified. These evidences were provided and assessed to assure their applicability this requirement.</p> <ul style="list-style-type: none"> - <i>The use of FFR can be validated (through on-farm record keeping, feed supplier, etc.);</i> <p>The formulated feed rations are part of the management system of the farms and therefore, each site possesses on-farm records which attest the FFR used. These evidences are also monitored on a monthly basis, according monitoring plan for the parameter FFR, as described in section B.7.1, and the PP internal procedure POP 14.</p> <ul style="list-style-type: none"> - <i>The project specific animal weights are more similar to developed country IPCC default values.</i> <p>The W_{site} value considered for each category of swine is the result of an average weight of the animals of all farms included in the project, and this value was applied in the baseline calculation.</p> <p><i>Finishers</i> is the animal category that represents majority of all animals from the farms included in this PDD, around 62% of the total number of animals (only three farms have other types of animals but not as significant as finishers). Finishers are considered to be “market swine” and presented an average weight of 90kg among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (50 kg) – the values form Latin America (28 kg), where the project is located, is even lower than Western Europe’s.</p> <p>This situation is also observed for the remaining four categories of swine (nursery and boars for market swine, gilts and sows for breeding swine): the values are more similar to those adopted in Western Europe than in Latin America, especially regarding the Breeding Swine (gilts and sows) and in the Market Swine (boars) which presented an average weight of 210kg and 230 kg respectively, among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for <i>National Greenhouse Gas Inventories, Volume 4, chapter 10</i>, the weights that are more similar to the project situation are those from the Western Europe region (198kg for Breeding Swine and 50 kg for Market Swine) – the values form Latin America (28kg for both classes of Breeding and Market Swine), where the project is located, is much lower than Western Europe’s. Only in the category nursery (also Market Swine), which roughly represents 28% of all animals from the farms included in this PDD, have an average weight of 20 kg, closer to the Latin America values than the Western Europe values.</p> <p>Therefore, is fair to consider that “<i>the project specific animal weights are more similar to developed country IPCC default values</i>” condition is fulfilled and that the VS adopted values for developed counties is in full compliance with the methodology requirements.</p>
--------------------	---

Data / Parameter:	$Q_{manure, j, LT, y}$
Data unit:	Tonnes DM/year
Description:	Quantity of manure treated from livestock type LT at animal manure management system j
Source of data:	Brascarbon Monitoring Report System
Measurement procedures (if any):	Supervision in the field
Monitoring frequency:	Annually, based on monthly records
QA/QC procedures:	Check the registers in the generated documents.
Any comment:	N/A

Data / Parameter:	$SVS_{j, LT, y}$
Data unit:	tonnes VS/tonnes DM
Description:	Specific volatile solids content of animal manure from livestock type LT and animal manure management system j in year y
Source of data:	Brascarbon Monitoring Report System
Measurement procedures (if any):	This parameter and the parameter $VS_{LT, y}$ are the same. Please refer to the monitoring frequency from the parameter $VS_{LT, y}$
Monitoring frequency:	This parameter and the parameter $VS_{LT, y}$ are the same. Please refer to the QA/QC procedures from the parameter $VS_{LT, y}$
QA/QC procedures:	Calculation of Project Emissions
Any comment:	This parameter and the parameter $VS_{LT, y}$ are the same. Please refer to the additional comments from the parameter $VS_{LT, y}$

Data / Parameter:	AI_i
Data unit:	Days
Description:	Annual average interval between manure collection and delivery for treatment at a given storage device i
Source of data:	N/A
Measurement procedures (if any):	Supervision in the field
Monitoring frequency:	Annually, based on monthly records
QA/QC procedures:	Check the registers in the generated documents.
Any comment:	N/A

Data / Parameter:	GE_{LT}
Data unit:	MJ/day
Description:	Daily average gross energy intake in MJ/day
Source of data:	N/A
Measurement procedures (if any):	There is no energy consumption nor energy production in the project activity.
Monitoring frequency:	N/A
QA/QC procedures:	N/A
Any comment:	No comments

Data / Parameter:	DE_{LT}
Data unit:	%
Description:	Digestible energy of the feed in per cent
Source of data:	N/A
Measurement procedures (if any):	There is no energy consumption nor energy production in the project activity.
Monitoring frequency:	N/A
QA/QC procedures:	N/A
Any comment:	No comments

Data / Parameter:	UE
Data unit:	Fraction of GE
Description:	Urinary energy expressed as fraction of GE
Source of data:	N/A
Measurement procedures (if any):	There is no energy consumption nor energy production in the project activity.
Monitoring frequency:	N/A
QA/QC procedures:	N/A
Any comment:	No comments

Data / Parameter:	ASH
Data unit:	Fraction of the dry matter feed intake
Description:	Ash content of the manure calculated as a fraction of the dry matter feed intake
Source of data:	Brascarbon Monitoring Report System
Measurement procedures (if any):	N/A
Monitoring frequency:	N/A
QA/QC procedures:	N/A
Any comment:	No comments.

Data / Parameter:	ED_{LT}
Data unit:	MJ/kg DM
Description:	Energy density of the feed in MJ/kg fed to livestock type LT
Source of data:	N/A
Measurement procedures (if any):	There is no energy consumption nor energy production in the project activity.
Monitoring frequency:	N/A
QA/QC procedures:	N/A
Any comment:	No comments

Data / Parameter:	EG_y
Data unit:	MWh
Description:	Total electricity generated from the recovered biogas in year y
Source of data:	N/A
Measurement procedures (if any):	The project activity does not have any farm with electricity generated from the recovered biogas
Monitoring frequency:	N/A
QA/QC procedures:	N/A
Any comment:	No comments

Data / Parameter:	EE_y
Data unit:	%
Description:	Energy Conversion Efficiency of the project equipment
Source of data:	N/A
Measurement procedures (if any):	The project activity does not Energy Conversion Efficiency of the project equipment.
Monitoring frequency:	N/A
QA/QC procedures:	N/A
Any comment:	No comments

Data / Parameter:	Flame _m
Data unit:	Flame on or Flame off
Description:	Flame detection of flare in the minute m
Source of data:	Brascarbon Monitoring Report System
Measurement procedures (if any):	Measure will be made using a fixed installation optical flame detector
Monitoring frequency:	Once per minute.
QA/QC procedures:	Check the registers in the generated documents. The enclosed flare will regularly undergo a maintenance process subject to the appropriate industrial standards and/or manufacturer's specifications in order to ensure measurement accuracy. The Monitoring Operational Procedure POP-08 was developed to calculate the flame and it can be found at the Brascarbon Operational Procedure Manual.
Any comment:	No comments.

B.7.2. Sampling plan

a) Sampling design

According to methodology AMS-III.D version 20.1 requirements, the parameter methane content in biogas will be measured with periodical measurements to attend 90% confidence level and 10% precision level.

Since the biogas is flowing continuously, the study population can be thought of as all the possible methane content measurements in a certain period— so large as to be almost infinite. The sampling method to be applied will be systematic sampling with a random start date which is appropriate for this type of population.

The sample size/adequate frequency of measurements will be determined using data from ex-ante methane content measurements gathered on a group of farms located in the same region during a certain period time and will be done in accordance with the Guidelines for Sampling and Surveys for CDM Project Activities and Programme of Activities. The collected data will be analyzed in order to assess compliance with the 90/10 confidence/precision level.

B.7.3. Other elements of monitoring plan

The following table, Table B8, presents the monitoring plan followed by Brascarbon in order to achieve certified emissions reductions, after each validation and verification process. Other information of monitoring plan and system can be found in the Appendix 5.

Table B8 – Monitoring Plan

ID	DATA	Data Type	Data Unit	Data Variable	Frequency	Measured(m) Calculated(c) Estimated(e) Documented(d)	Proportion of the data to be monitored	How will the data be archived?	For how long is archived data to be kept?	Comment
1	T _f	Temp	°C	Flare Temperature	Every 1 minute	M	100%	electronic	Until end of CP + 2 years	Use for flare efficiency
2	Site Inspection	Document	----	----	Annually	D	100%	electronic	Until end of CP + 2 years	General Site Inspection
3	N _{LT,y}	Number	-	Nr, Of heads	Monthly	C	100%	electronic	Until end of CP + 2 years	Used to quantify the methane generation potential
4	BG _{burnt,y}	Volume	m ³	Biogas produced	Every 1 minute	M	100%	electronic	Until end of CP + 2 years	Cumulative biogas production
5	W _{CH₄,y}	Fraction	%	Methane content	TBD(*)	M	100%	electronic	Until end of CP + 2 years	Concentration in wet basis
6	T _{biogas}	Temp	°C	Biogas Temperature	TBD(*)	M	100%	electronic	Until end of CP + 2 years	Use to biogas density calculation
7	D _{CH₄}	Mass	tonne/m ³	Density	Monthly	C	100%	electronic	Until end of CP + 2 years	Density
8	FE	Efficiency	%	Temperature and flare operation parameters	Monthly (based on every 1 minute data)	C	100%	electronic	Until end of CP + 2 years	Efficiency determined by the burning temp and flare operation parameters
9	QDM	Supervision	--	---	Every Batch Disposed	E	100%	electronic	Until end of CP + 2 years	Sludge disposed outside project boundary
10	W _{site}	Mass	kg	Average Animal weight	Quarterly	D	100%	electronic	Until end of CP + 2 years	Average Animal weight
11	ER _{y,ex-post}	Mass	tonne	CO ₂ e	Annually	C	100%	electronic	Until end of CP + 2 years	Yearly methane potential generation
12	FFR	-----	---	Feed Formulation	Monthly	D	100%	electronic	Until end of CP + 2 years	Feed Formulation Rations
13	P _{biogas}	Pressure	mbar	Biogas Pressure	TBD(*)	M	100%	electronic	Until end of CP + 2 years	Biogas pressure
14	Genetic Source	Document	-----	genetic	Annually	D	100%	electronic	Until end of CP + 2 years	Genetic Source
15	MS _{%i,y}	fraction	%	Manure handled	Annually	E	100%	electronic	Until end of CP + 2 years	General Site Inspection
16	FV _{RG,h}	volume	m ³ /h	Volume	Every 1 minute	M	100%	electronic	Until end of CP + 2 years	Volume of residual gas
17	fV _{CH₄,RG}	fraction	%	Methane content	TBD(*)	M	100%	electronic	Until end of CP + 2 years	Volumetric methane fraction of the residual gas
18	F _{CH₄,m}	mass	kg	Mass flow rate	Monthly	C	100%	electronic	Until end of CP + 2 years	Total mass flow rate of the residual gas
19	N _{da,y}	number	days	days	Monthly	M	100%	electronic	Until end of CP + 2 years	Nr. Of days animal is alive
20	N _{p,y}	number	heads	Nr of heads	Monthly	M	100%	electronic	Until end of CP + 2 years	Nr. Of heads per category annually
21	ndy	number	Days	days	Annually	M	100%	electronic	Until end of CP + 2 years	Number of days the treatment plant was operational
22	VS _{LT,y}	Mass	kg	Volatile solids for livestock	Annually	C	100%	electronic	Until end of CP + 2 years	Volatile solids for livestock LT entering the animal manure management system in year y
23	Q _{manure LT,y}	Mass	ton	Manure handled	Annually	E	100%	electronic	Until end of CP + 2 years	Quantity of manure treated from livestock type LT at animal manure management system j

ID	DATA	Data Type	Data Unit	Data Variable	Frequency	Measured(m) Calculated(c) Estimated(e) Documented(d)	Proportion of the data to be monitored	How will the data be archived?	For how long is archived data to be kept?	Comment
24	$SVS_{jLT,y}$	Mass	ton	Specific volatile solids content of animal manure	Annually	C	100%	electronic	Until end of CP + 2 years	Specific volatile solids content of animal manure from livestock type LT and animal manure management system j in year y
25	ASH	Fraction	_%	Ash content	Annually	C	100%	electronic	Until end of CP + 2 years	Ash content of the manure calculated as a fraction of the dry matter feed intake
26	Flame _m	On/Off	N/A	Flame detection of flare in the minute m	Every minute	M	100%	electronic	Until end of CP + 2 years	Flame _m is measured every minute and assesses if the flame is on or off.

(*)TBD: to be determined to attend 90% confidence level and 10% precision. The monitoring frequency will be, at least, monthly.

The monitoring plan will concentrate on ensuring the emission reductions are accurately accounted within the project boundary.

Brascarbon introduced operational procedures, from the Brascarbon Operational Procedures Manual, to facilitate the monitoring system of the parameters described in the Table B8 – Monitoring Plan.

A list of the operational procedures can be found in the Appendix 5, at the end of this project document design.

The summary of the operational procedures with the main activities is described below:

Monitoring of the Flare Temperature

The temperature of the flare will be controlled by a logic system, able to store the flare temperature continuously. The sensor - thermo coupling - is installed in the flare body.

The signal from the thermocouple is sent to the PLC where the information of the temperature is recorded every each minute.

The file information from the logic system will be recovered monthly, by using a pen drive and the file will be sent to the QA/QC officer to manage the information for further verification. Then, a spreadsheet in excel will be available from the system to show the temperature per minute per day. The system PLC and the thermocouple will be powered by solar cell – no use of energy from the grid. A 12 volts battery is also included in the system to save energy to be used during the night or days lack of sun. The battery capacity is for 240 hours.

In the operational procedure POP 1 is the form 01.001 where the temperature information is managed according to the specification mentioned above. All QA/QC procedures are described in the operational procedure related to the maintenance and/or calibration of the equipment.



PEN DRIVE



PLC

Site Inspection.

A check list included in the procedure POP 2 – Site Inspection - number 02.001 is the basic orientation to guide the technicians during inspection in the field to follow all items related to the project activity installation.

Attached on it, the MS% i,y - Fraction of manure handled in the system during the year, is included to be inspected during the each farm visit.

No changes in the manure managing system will be permitted during the project activity.

Variables to be monitored: SITE INSPECTION and MS%i,y.

Average number of animals.

To calculate the average number of animals per category LT in the year y ($N_{LT,y}$) the operational procedure has the forms 03.003 and 03.001 in the operational procedure POP 3 (average number of animals) where it takes into account of the number of days the animal is alive in the year y ($N_{da,y}$) and the number of animals produced per category LT in the year y ($N_{p,y}$).

The days of animals alive and the total animal produced is also monitored with the same procedure and the formulary 03.003.

The formula used to the calculation is indicated in the PDD section B.4, step 2 item B, equation B3.

Variables to be monitored: $N_{LT,y}$, $N_{day,y}$ and $N_{p,y}$.

Measurement of the volumetric flow rate of the biogas and residual gas.

The operational procedure POP 4- Measurement of the biogas flow rate, is a guide that explains to the technicians how to obtain the biogas flow rate.

The control of the flow rate is by a PLC (see picture in the POP 1 description above) installed in the control panel in the project activity site.

The panel is equipped with solar cells that supply energy to the system. A battery (capacity for 10 days lack of sun) and the flow rate transmitter device to receive information from the thermal mass meter. The flow meter used in the project activity is a thermal mass flow meter.

The system is very reliable and supplied by Endress+hauser, leader of measurement system of liquids and gases. Example of the meter used in the project activity:



The information recorded in the PLC is recovered by the use of a pen drive and the file containing the information will be send to the QA/QC officer to manage information for further verification. A spreadsheet in excel is available from the system to show the flow rate per minute per day.

The variables measured with this procedure are: $BG_{burnt,y}$ and $FV_{RG,h..}$.

The data monitored is controlled in the form 04.001 attached in the operational procedure POP-04.

Methane content determination.

The POP 5- Methane content was prepared to guide the technicians how to obtain the methane content using electronic equipment.

The methane content is obtained by BIOGAS or TESTO electronic equipment.

The concentration of methane is measured in few seconds before starting the measurement button.

The equipment operation and the devices to be used are described in the operational procedure, as well as in the equipment manual.

Both equipment are able to measure the methane concentration in the biogas or in the flare residual gas.

The variables measured with this equipment are: $W_{CH_4,y}$ and $fv_{CH_4,RG,y}$.

All QA/QC procedures are described in the operational procedure related to the maintenance and/or calibration of the equipment.

The data monitored is controlled in the form 04.001.

Biogas temperature measurement.

The biogas temperature is obtained by an electronic equipment BIOGAS.

The methane temperature is measured in few seconds after inserting the thermocouple in the biogas line device.

The equipment operation and the devices to be used are described in the operational procedure, as well as in the equipment manual.

All QA/QC procedures are described in the operational procedure related to the maintenance and/or calibration of the equipment.

The variable measured with this equipment is: T biogas.

The data monitored is controlled in the form 04.001 described in the operational procedure POP 6 – Biogas temperature measurement.

Density of the methane determination.

The POP 7- Density of the Methane - is a guide to calculate the methane density. The form 07.001 attached in the operational procedure shows the data to be filled to make the calculation. The methane density calculation is in accordance with the Tool to determine project emissions from flaring gases containing methane.

The variable monitored with this procedure: D_{CH_4} .

Flare efficiency.

According with the of version 02 of the tool Project emissions from flaring, in its step 2 – Determination of flare efficiency, for determining the efficiency of combustion of enclosed flares there is the option to apply a default value or determine the efficiency based on monitored data. The operational procedure POP 8 – Flare efficiency was developed to monitor and calculate the flare efficiency.

In the case of enclosed flares, project participants may choose between two options to determine the flare efficiency for minute m ($\eta_{flare,m}$). The PP has chosen Option A – Apply a default value for flare efficiency.

The flare efficiency for the minute m ($\eta_{flare,m}$) is 90% when the following two conditions are met to demonstrate that the flare is operating:

- (1) The temperature of the flare ($T_{EG,m}$) and the flow rate of the residual gas to the flare ($F_{RG,m}$) is within the manufacturer's specification for the flare ($SPEC_{flare}$) in minute m ; and
- (2) The flame is detected in minute m ($Flame_m$).

Otherwise $\eta_{flare,m}$ is 0%.

All data and parameters that are required to monitor whether the flare operates within the range of operating conditions according to manufacturer's specifications will be continuously monitored. The temperature and biogas flow rate will be monitored minute by minute by a sensor installed in the enclosed flare and are registered by a CLP. The data stored in the CLP is recovered monthly by the use of a pen drive and the file containing the information will be sent to the QA/QC officer to manage the information. Brascarbon developed the formulary 08.001 in the operational procedure to monitor the hourly flare efficiency according to the criteria above mentioned.

The variable monitored with this procedure: FE.

Biogas pressure.

The biogas pressure is obtained by an electronic equipment BIOGAS and procedures described in the operational procedure POP 13- Biogas pressure.

The operating pressure of the biodigester is atmospherically.

The equipment operation and the devices to be used are described in the operational procedure, as well as in the equipment manual.

All QA/QC procedures are described in the operational procedure related to the maintenance and/or calibration of the equipment.

The variable measured with this equipment is: P biogas.

The data monitored is controlled in the form 04.001.

Formulated feed rations.

Monitoring and controlling of the formulated feed rations used per animal category per confined feed animal operation.

The variable monitored: FFR.

Reference of the operational procedure: POP 14 – formulated feed rations monitoring.

Genetic Source.

Monitoring and controlling of the genetic source in the project activity per farm.

The variable monitored: GENETIC SOURCE.

Reference of the operational procedure: POP 15 – Genetic Source Monitoring.

Animal weight.

The animal weight is monitored and controlled by a form 16.001 where each animal category is monitored during the year, according to the operational procedure POP 16 – Animal Weight Monitoring.

The data collection is realized quarterly by each farm owner and provided to the PP. The farm owners are responsible for the assurance of all the logistics associated with the swine production, providing the animal nutrition, genetics and all the overall animal weight.

The quarterly weight of the animals for each producer of the PDD is made following their internal procedures, that is not under the PP's control – the association selects the animals based on a random sampling approach applied in each category, since it is infeasible to weight each animal individually in the farms belonging to the project (these farms can more than 5,000 animals each). In addition, each project site presents the actual animal weight by using Brascarbon form 16.001 after a cross-check by the PP, using the real information after each batch of animals exits each farm; the template was designed to quarterly report animal weight per category.

The values of the quarterly weights presented by each producer (following their own internal procedures) to the PP are cross-checked against two different credible sources:

- Reference figures from EMBRAPA (an undisputed Brazilian Agricultural Research Corporation nationally recognized for these scope) for each category; and
- The figures provided by each farm owner when each of the swine batches exits each farm (each batch stays around 5 to 6 months per farm), as explained below. The producers provide invoices with 100% of the animals weight (and number), allowing a full cross-check with the weight values provided and assuring that all the information is accurate.

If the PP verifies during the cross-check any discrepancy between the values provided quarterly and the full weighting and counting of the animals in the invoices provided by the swine producers each time any batch exits a giving farm, those values will be updated accordingly with these real figures.

The current practice of swine farms in Brazil is that each farm receives new batches of animals every 5 to 6 months (which is also the average time that a batch stays in a farm) and the producer, together with COOASGO, performs regular and periodical visits to each farm in order to assess and evaluate the correct development of each batch in terms of growing/weighting of the animals (according with what is expected at each growing stage of a given batch). It is important to highlight that both the farm owners COOASGO rely on the quality of the values measured since their sole professional occupation is the pig production and, therefore, it is within their best interests to have a correct and reliable way to assess the weighting of the animals (which is their business) based on their experience and internal procedures.

The current practice of swine farms in Brazil is that each farm receives new batches of animals every 5 to 6 months (which is also the average time that a batch stays in a farm) and each producer performs regular and periodical visits to each farm in order to assess and evaluate the correct development of each batch in terms of growing/weighting of the animals (according with what is expected at each growing stage of a given batch). It is important to highlight that the farm owners rely on the quality of the values measured since their sole professional occupation is the pig production and, therefore, it is within their best interests to have a correct and reliable way to assess the weighting of the animals (which is their business) based on their experience and internal procedures.

Every 5 to 6 months (depending on each batch and farm), the animal batches leave the farms and they are, in this specific situation, 100% weighted by the producers – this weighting is undertaken to the totality of animal presented in the batch since the profits associated with the animal production are weight based. According with the swine producers, a possible range of +/- 5kg within the animal growing is considered a normal fluctuation and therefore admissible.

Each time a batch exits a farm, each farm owner provides the invoices to attest the feasibility of the figures adopted, allowing a complete and thorough cross-check by PP of all the data used for this parameter.

Quarterly the data from the feed operations are checked and transferred to the form.

Records available in the feed operations will be copied and filed at Brascarbon office and attached with the form 16.001.

The variable monitored: W site.

Methane mass flow rate in the residual gas.

The residual mass flow rate can be determinate by the POP 17 – Emissions reductions ex-post, where it calculates all parameters to determine the emissions reductions ex-post.

To be calculated according to the “Tool to determine project emissions from flaring gases containing methane”. An operational procedure POP 17 includes the instruction to the calculation.

According with the step 1 – Determination of the methane mass flow in the residual gas of this tool, this parameter should be determined using another tool, namely Tool to determine the mass flow of a greenhouse gas in a gaseous stream. In second tool, there are several options to determine the Mass flow rate of methane in the residual gaseous stream. Option 2 - Simplified calculation without measurement of the moisture content was chosen by the PP.

Within this option, option A will be applicable by the demonstration that the gaseous stream is dry. The PP will demonstrate that the temperature of the gaseous stream (Tt) is less than 60°C (333.15 K) at the flow measurement point.

Hence this parameter will be calculated according with Equations 5 and 6 of the tool. This means:

$$F_{i,t} = V_{t,db} \times v_{i,t,db} \times \rho_{i,t}$$

Equation (5)

With:

$$\rho_{i,t} = \frac{P_t \times MM_i}{R_u \times T_t}$$

Equation (6)

Where:

$F_{i,t}$	=	Mass flow of greenhouse gas i in the gaseous stream in time interval t (kg gas/h)
$V_{t,db}$	=	Volumetric flow of the gaseous stream in time interval t on a dry basis (m ³ dry gas/h)
$v_{i,t,db}$	=	Volumetric fraction of greenhouse gas i in the gaseous stream in a time interval t on a dry basis (m ³ gas i /m ³ dry gas)
$\rho_{i,t}$	=	Density of greenhouse gas i in the gaseous stream in time interval t (kg gas i /m ³ gas i)
P_t	=	Absolute pressure of the gaseous stream in time interval t (Pa)
MM_i	=	Molecular mass of greenhouse gas i (kg/kmol)
R_u	=	Universal ideal gases constant (Pa.m ³ /kmol.K)
T_t	=	Temperature of the gaseous stream in time interval t (K)

The formulary 17.001 (CER spreadsheet) is used to determine the variables above mentioned.

Number of days the treatment plant was operational

The number of days the treatment plant was operational can be determinate by the POP 24 – days of functioning, where it is monitored the number of days in a year “y” that the treatment plant has operated.

The variables monitored with this procedure: nd_y

Volatile solids

The four conditions to apply B0 value of developed countries are fully applicable to developed countries can be used provided the following four conditions are satisfied:

- *The genetic source of the livestock originates from an Annex I Party;*

Genetics and nutrition adopted for these farms as so as in western Europe. More details or information of the genetics can be obtained at the producers or at the Associação Brasileira dos Criadores de Suínos (Brazilian Swine Association) – <http://www.abcs.org.br/>.

The genetic source of the livestock is therefore in compliance with this methodology requirement, which can be confirmed and verified by the genetic documents of the animals of each farm. These evidences were provided and assessed to assure their applicability to this requirement.

- *The farm uses formulated feed rations (FFR) which are optimized for the various animal(s), stage of growth, category, weight gain/productivity and/or genetics;*

The formulated feed rations are created according with the characteristics of the animals, their stage of growth, category, weight gain and genetics. Each farm possesses their FFR composition according with the type of animal(s) accommodated, which was confirmed and verified. These evidences were provided and assessed to assure their applicability this requirement.

- *The use of FFR can be validated (through on-farm record keeping, feed supplier, etc.);*

The formulated feed rations are part of the management system of the farms and therefore, each site possesses on-farm records which attest the FFR used. These evidences are also monitored on a monthly basis, according monitoring plan for the parameter FFR, as described in section B.7.1, and the PP internal procedure POP 14.

- *The project specific animal weights are more similar to developed country IPCC default values.*

The W_{site} value considered for each category of swine is the result of an average weight of the animals of all farms included in the project, and this value was applied in the baseline calculation.

Finishers is the animal category that represents majority of all animals from the farms included in this PDD, around 62% of the total number of animals (only three farms have other types of animals but not as significant as finishers). Finishers are considered to be “market swine” and presented an average weight of 90kg among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for *National Greenhouse Gas Inventories, Volume 4, chapter 10*, the weights that are more similar to the project situation are those from the Western Europe region (50 kg) – the values from Latin America (28 kg), where the project is located, is even lower than Western Europe’s.

This situation is also observed for the remaining four categories of swine (nursery and boars for market swine, gilts and sows for breeding swine): the values are more similar to those adopted in Western Europe than in Latin America, especially regarding the Breeding Swine (gilts and sows) and in the Market Swine (boars) which presented an average weight of 210kg and 230 kg respectively, among all farms included in the PDD by the time of the project’s registration (and this was the value adopted for the parameter W_{site}). Taking into account the figures presented in Tables 10 A-7 and 10 A-8 from the 2006 IPCC Guidelines for *National Greenhouse Gas Inventories, Volume 4, chapter 10*, the weights that are more similar to the project situation are those from the Western Europe region (198kg for Breeding Swine and 50 kg for Market Swine) – the values from Latin America (28kg for both classes of Breeding and Market Swine), where the project is located, is much lower than Western Europe’s. Only in the category nursery (also Market Swine), which roughly represents 28% of all animals from the farms included in this PDD, have an average weight of 20 kg, closer to the Latin America values than the Western Europe values.

Therefore, is fair to consider that “*the project specific animal weights are more similar to developed country IPCC default values*” condition is fulfilled and that the VS adopted values for developed countries is in full compliance with the methodology requirements.

Monitoring System

The monitoring system will be followed according to the Brascarbon Operations Procedures Manual, detailed to attend all necessary controls in the site.

Operational / Monitoring Procedures

Operational / Monitoring procedures listed in the Appendix 5.

Quality Assurance/Control: QA/QC

The measuring instruments will be calibrated by the manufacturers’ representatives on a manufacturer recommendation basis. The certification of calibration will be controlled by QA/QC officer. Also, the QA/QC officer will be responsible to assure that all Brascarbon Operations Procedures will be executed based in the ISO9000.

Training


The training of the technicians and all employees is provided by the Operations Manager. The topics of the training are as below:

1. General explanation of the project.
2. Explanation of the procedures of the Operations Procedure Manual.
3. Procedures and preparations for the start-up.
4. Maintenance procedures.
5. Biogas safety instructions.

6. Biogas measurement.
7. Safety Issues.

The training document and the equipment manuals are stored for easy reference in the Brascarbon office.

Organization

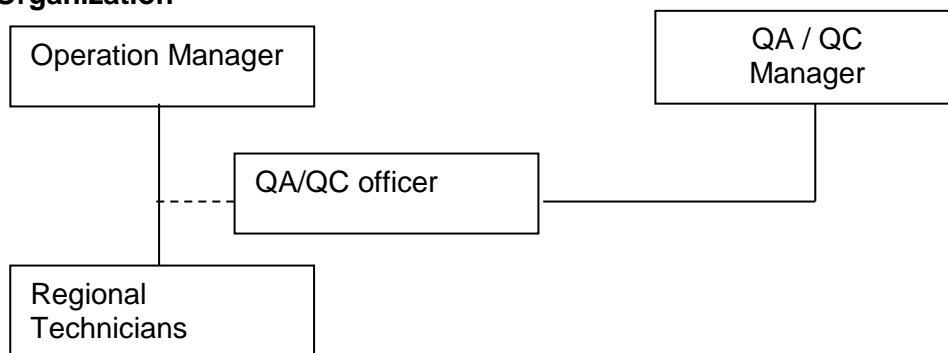

Operation Manager

Engineer, responsible for the project maintenance and monitoring data collection.

QA/QC Manager

Engineer, responsible for the monitoring operation and emissions for the project activity.

Regional Technicians

Technician, responsible for the monitoring and maintenance of the site projects according to the procedures in the Operations Procedure Manual.

QA/QC officer

Responsible to assure the quality control of the information and the CDM project documents.

Maintenance

For maintenance of the equipment and to attend the monitoring system, BRASCARBON will use the practices recommended by the equipment supplier for repairs, calibration, etc. The regular maintenance in the site project boundary will be according to the Brascarbon Operation Procedures Manual for all items considered in the project such as the digester, flare, measuring systems, piping, electrical parts and others.

SECTION C. Start date, crediting period type and duration

C.1. Start date of project activity

The starting date for this activity was 15/06/2011, which represented the date where the first sites started their construction.

C.2. Expected operational lifetime of project activity

The expected life for this project is 21 years and 0 months.

C.3. Crediting period of project activity

C.3.1. Type of crediting period

Renewable crediting period (the first crediting period).

C.3.2. Start date of crediting period

The starting date of the second crediting period is: **08/11/2017**.

C.3.3. Duration of crediting period

The length of the crediting period is **7 years and 0 months**.

SECTION D. Environmental impacts

D.1. Analysis of environmental impacts

An environmental impact analysis is not required for this type of GHG project activity.

Beyond the principal environmental benefits of the project includes:

- reducing atmospheric emissions of volatile solids causing odour
- reducing the population of flies
- best control on the bio-security system
- reducing the possible spread of disease

Digesters, to reduce GHG emissions in the confined animals operations, are not pre-requisite to get the environmental licenses. The environmental impacts concerning the project activity is very significant because this project activity can contribute for the local and global sustainable development.

www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_l4l77t4r.PDF
www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_q9m29k2j.pdf
www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_b889i6r.pdf
www.cnpsa.embrapa.br/sgc/sgc_publicacoes/publicacao_f6c34f6j.pdf

D.2. Environmental impact assessment

No environmental Impact Assessment for the project activity was conducted.

SECTION E. Local stakeholder consultation

E.1. Modalities for local stakeholder consultation

The Brascarbon presentation of the MDL project for the stakeholders was held twice in Boituva city 2008 at the Sindicato dos Produtores Rurais de Boituva, Sao Paulo. The first presentation for the community was in 21st December 2007 and the second was in 2nd July 2008, where the community involved as swine producers, unions, etc. could receive all information about de CDM projects proposal based on UNFCCC methodologies. At the end of the presentation Brascarbon introduced a section of questions and answers for clarifications.

The invitation for the stakeholders' consultation for the project activity was done by personal mail asking for comments of the PDD attached to the Brascarbon site and also in the UNFCCC site, according to the Resolution 7 of the Brazilian DNA.

The following stakeholders were invited to comment on the project activity according to the Resolution 7 of the Brazilian DNA:

- City Hall and Chamber of Councilors.
- Departments and Secretaries: municipal, state and federal.
- ONG's
- Unions.
- Ministry Public – State
- Ministry Public – Federal
- State
- Legislative Assembly

E.2. Summary of comments received

No comments and negative issues were received from the local stakeholders.

E.3. Consideration of comments received

No comments were received from stakeholders.

SECTION F. Approval and authorization

The letter of approval of the Host country party was issued and is available an UNFCCC website for the project (<https://cdm.unfccc.int/Projects/DB/DNV-CUK1267175509.52/view>).

Date of issuance	Party involved in the project activity
05/02/2010	Brazil (Host country)

Appendix 1. Contact information of project participants

Organization name	Brascarbon Consultoria, Projetos e Representação Ltda.
Country	Brazil
Address	+55 11 5523 7059
Telephone	+55 11 2533-6346
Fax	info@brascarbon.com.br
E-mail	www.brascarbon.com.br
Website	Brazil
Contact person	Mário Pacifico da Silva

Appendix 2. Affirmation regarding public funding

There is no official development assistance being provided for this project.

Appendix 3. Applicability of methodologies and standardized baselines

Complete information regarding applicability of selected methodology has been given in Section B.2 of PDD.

Appendix 4. Further background information on ex ante calculation of emission reductions

BASELINE INFORMATION

																					REDUCTIONS	
ID	Farm/Site	Animal Category	N _{LT,α}	W _{total}	W _{alt}	VS _{total}	VS _{LT}	nd _α	VS _{RT,α}	UF _b	B _{NTI}	GWP _{CH4}	D _{CH4}	MCF	MS _(T,S,k)	MS% _{i,y}	BE _y	PE _{PL,y}	PE _{num,α}	PE _y	ER _y	
1	Sitio Santa Cruz	Sows	700	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	731	98	73	171	560	
		Finishers	8,000	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	8,826	1,189	883	2,072	6,754	
		Nursery/Weaners	2,500	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	827	111	83	194	633	
		Boars	250	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	735	99	74	173	562	
		Gilts	13	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	13	2	1	3	10	
		total	11,463															11,132	1,499	1,114	2,613	8,519
2	Faz Esmeralda	Sows	500	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	522	70	52	122	400	
		Finishers	3,500	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	3,861	520	386	906	2,955	
		Nursery/Weaners	1,800	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	596	80	60	140	456	
		Boars	250	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	735	99	74	173	562	
		Gilts	10	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	10	1	1	2	8	
		total	6,060															5,724	770	573	1,343	4,381
3	Fazenda São Carlos	Sows	1,500	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	1,566	211	157	368	1,198	
		Finishers	11,000	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	12,136	1,634	1,214	2,848	9,288	
		Nursery/Weaners	6,000	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	1,986	267	199	466	1,520	
		Boars	600	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	1,765	238	177	415	1,350	
		Gilts	15	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	15	2	2	4	11	
		total	19,115															17,468	2,352	1,749	4,101	13,367
4	Fazenda Sta Elisa - Site 1	Sows	300	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	313	42	31	73	240	
		Finishers	2,700	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	2,979	401	298	699	2,280	
		Nursery/Weaners	1,100	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	364	49	36	85	279	
		Boars	100	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	294	40	29	69	225	
		Gilts	9	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	9	1	1	2	7	
		total	4,209															3,959	533	395	928	3,031
5	Fazenda Sta Elisa - Site 2	Sows	600	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	627	84	63	147	480	
		Finishers	4,800	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	5,296	713	530	1,243	4,053	
		Nursery/Weaners	2,200	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	728	98	73	171	557	
		Boars	162	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	477	64	48	112	365	
		Gilts	11	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	11	1	1	2	9	
		total	7,773															7,139	960	715	1,675	5,464

BASELINE INFORMATION (Cont.)

6	Agrupecuária Sítio Herlu	Sows	-	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		Finishers	2,000	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	2,206	297	221	518	1,688
		Nurserv/Weaners	-	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		Boars	-	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		Gilts	-	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		total	2,000														2,206	297	221	518	1,688
7	Sítio Santo Antônio - Site 1	Sows	700	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	731	98	73	171	560.00
		Finishers	3,200	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	3,530	475	353	828	2,702
		Nurserv/Weaners	3,000	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	993	134	99	233	760
		Boars	49	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	144	19	14	33	111
		Gilts	14	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	14	2	1	3	11
		total	6,963														5,412	728	540	1,268	4,144
8	Granja Lajeado	Sows	480	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	501	67	50	117	384
		Finishers	2,959	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	3,264	440	326	766	2,498
		Nurserv/Weaners	1,644	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	544	73	54	127	417
		Boars	50	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	147	20	15	35	112
		Gilts	6	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	6	1	1	2	4
		total	5,139														4,462	601	446	1,047	3,415
9	Faz São José Nápoles	Sows	1,500	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	1,566	211	157	368	1,198
		Finishers	10,000	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	11,032	1,486	1,103	2,589	8,443
		Nurserv/Weaners	5,300	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	1,754	236	175	411	1,343
		Boars	450	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	1,324	178	132	310	1,014
		Gilts	30	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	30	4	3	7	23
		total	17,280														15,706	2,115	1,570	3,685	12,021
10	Sítio Santo Antônio - Site 2	Sows	-	198	220	0.46	0.51	365	187	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		Finishers	3,800	50	90	0.3	0.54	365	197	0.94	0.45	25	0.00067	79	1	1	4,192	565	419	984	3,208
		Nurserv/Weaners	-	50	27	0.3	0.16	365	59	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		Boars	-	50	240	0.3	1.44	365	526	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		Gilts	-	198	210	0.46	0.49	365	178	0.94	0.45	25	0.00067	79	1	1	-	-	-	-	-
		total	3,800														4,192	565	419	984	3,208

Appendix 5. Further background information on monitoring plan

The following table presents the explanation of the QA/QC procedures of the monitoring plan followed by BRASCARBON in order to achieve certified emission reductions, after each validation and verification process:

ID	DATA VARIABLE	UNCERTAINTY LEVEL	DATA UNIT	DATA ORIGIN
1	T _f	Low	°C	Register from the measurement system, information managed by Brascarbon,
2	Site Inspection	Low	-----	Register information managed by Brascarbon
3	N _{LT,y}	Low	Nr, Of heads by category	Register from the measurement system, information managed by Brascarbon,
4	BG _{burned,y}	Low	m ³	Register from the measurement system, information managed by Brascarbon,
5	W _{CH4}	Low	%	Register from the measurement system, information managed by Brascarbon,
6	T _{biogas}	Low	°C	Register from the measurement system, information managed by Brascarbon,
7	D _{CH4}	Low	t/m ³	Register from the measurement system, information managed by Brascarbon,
8	FE	Low	%	Register information managed by Brascarbon,
9	QDM	Low	---	Register from the measurement system, information managed by Brascarbon,
10	W _{site}	Low	Kg	Register from the measurement system, information managed by Brascarbon,
11	ER _{y,ex-post}	Low	t CO _{2e}	Register from the measurement system, information managed by Brascarbon,
12	FFR	Low	-----	Register from the measurement system, information managed by Brascarbon,
13	P _{biogas}	Low	mbar	Register information managed by Brascarbon.
14	Genetic Source	Low	-----	Register information managed by Brascarbon.
15	MS _{%i,y}	Low	%	Register information managed by Brascarbon.
16	FV _{RG,h}	Low	m ³ /h	Register information managed by Brascarbon.
17	fV _{CH4,RG}	Low	%	Register information managed by Brascarbon.
18	F _{CH4, m}	Low	kg	Register information managed by Brascarbon.
19	N _{da,y}	Low	days	Register information managed by Brascarbon.
20	N _{p,y}	Low	Nr, Of heads by category	Register information managed by Brascarbon.
21	ndy	Low	days	Register information managed by Brascarbon.
22	VS _{LT,y}	Low	kg	Register information managed by Brascarbon.
23	Q _{manure LT,y}	Low	ton	Register information managed by Brascarbon.
24	SVS _{jLT,y}	Low	ton	Register information managed by Brascarbon.
25	ASH	Low	%	Register information managed by Brascarbon.

BRASCARBON has implemented the Operation Procedures Manual and forms to capture and report monitored data and maintenance activities throughout the project lifecycle. On-site assessment, supplier production data, task tracking, and post-implementation auditing tools have been developed to ensure accurate, consistent, and complete data gathering and project implementation.

By coupling these capabilities with an ISO-based quality and environmental management system, BRASCARBON enables transparent data collection and verification.

Procedures from Brascarbon Operation Procedures Manual to ensure accurate and consistent data for monitoring system have been developed as indicated in the following table:

ID	DATA /PARAMETERS/TITLE	RESPONSIBLE	PROCEDURE	COMENTS
1	T_f	TR	POP 1	Flare Temperature
2	SITE INSPECTION $MS\%_{i,y}$ $VS_{LT,y}$ $SVS_{LT,y}$	TR	POP 2	General site Inspection
3	$N_{LT,y}$ $N_{aa,y}$ $N_{p,y}$	TR	POP 3	Number of heads
4	$BG_{burnt,y}$ $FV_{RG,h}$	TR	POP 4	Biogas produced and burnt
5	$W_{CH4,y}$ $f_{CH4,RG}$	TR	POP 5	Methane content
6	T_{biogas}	TR	POP 6	Biogas Temperature
7	D_{CH4}	QC	POP 7	Methane Density
8	FE	TR	POP 8	Flare Efficiency
9	QDM Q_{manure} ASH	TR	POP 9	Sludge Mass
10	TRAINING	QC	POP 11	General training of procedures and safety issues
11	MAINTENANCE	OM	POP 12	Up-date of the maintenance activities
12	P_{biogas}	TR	POP 13	Biogas pressure
13	FFR	TR	POP 14	Formulated Feed Rations
14	GENETIC SOURCE	TR	POP 15	Genetic source
15	W_{site}	TR	POP 16	Average animal weight
16	$ER_{ex-post}$ $F_{CH4,m}$	QC	POP 17	Yearly emissions reductions ex-post
17	N_{dy}	QC	POP 24	Number of days the treatment plant was operational

Legend:

A: Annually

Q: Quarterly

M: Monthly

S: Semesterly

TR: Regional Technician

QC: Quality Control

TBD: to be determined to attend 90% confidence level and 10% precision. The monitoring frequency will be, at least, monthly.

OM: Operation Manger

Appendix 6. Summary report of comments received from local stakeholders

No comments were received from local stakeholders.

Appendix 7. Summary of post-registration changes

A request of post-registration changes regarding changes to the project design will be submitted together with the current revised version 5 of this PDD, for the request for the renewal of the crediting period. The change refers to the removal of 5 sites of the project activity which has been registered with 15 sites:

- BCA-007SP1-08 – Sítio Cotovia
- BCA-075SP1-08 – Faz. Anália Franco
- BCA-107SP1-08 – Sítio São João – site 1
- BCA-107SP2-08 – Sítio São João – site 2
- BCA-109SP1-08 – Sítio São Thiago

The change does not adversely impact neither a) the applicability and application of the applied methodology under which the project has been registered; b) the additionality of the project activity nor c) the scale of the project activity, therefore no prior approval by the Board is deemed necessary and a notification of post-registration changes is considered appropriate. The change has been incorporated in this revised PDD (Version 5 dated 20th September 2017).

- - - - -

Document information

<i>Version</i>	<i>Date</i>	<i>Description</i>
10.1	28 June 2017	Revision to make editorial improvement.
10.0	7 June 2017	Revision to: <ul style="list-style-type: none"> • Improve consistency with the “CDM project standard for project activities” and with the PoA-DD and CPA-DD forms; • Make editorial improvement.
09.0	24 May 2017	Revision to: <ul style="list-style-type: none"> • Ensure consistency with the “CDM project standard for project activities” (CDM-EB93-A04-STAN) (version 01.0); • Incorporate the “Project design document form for small-scale CDM project activities” (CDM-SSC-PDD-FORM); • Make editorial improvement.
08.0	22 July 2016	EB 90, Annex 1 Revision to include provisions related to automatically additional project activities.
07.0	15 April 2016	Revision to ensure consistency with the “Standard: Applicability of sectoral scopes” (CDM-EB88-A04-STAN) (version 01.0).

<i>Version</i>	<i>Date</i>	<i>Description</i>
06.0	9 March 2015	Revision to: <ul style="list-style-type: none"> • Include provisions related to statement on erroneous inclusion of a CPA; • Include provisions related to delayed submission of a monitoring plan; • Provisions related to local stakeholder consultation; • Provisions related to the Host Party; • Make editorial improvement.
05.0	25 June 2014	Revision to: <ul style="list-style-type: none"> • Include the Attachment: Instructions for filling out the project design document form for CDM project activities (these instructions supersede the "Guidelines for completing the project design document form" (Version 01.0)); • Include provisions related to standardized baselines; • Add contact information on a responsible person(s)/ entity(ies) for the application of the methodology (ies) to the project activity in B.7.4 and Appendix 1; • Change the reference number from F-CDM-PDD to CDM-PDD-FORM; • Make editorial improvement.
04.1	11 April 2012	Editorial revision to change version 02 line in history box from Annex 06 to Annex 06b.
04.0	13 March 2012	Revision required to ensure consistency with the "Guidelines for completing the project design document form for CDM project activities" (EB 66, Annex 8).
03.0	26 July 2006	EB 25, Annex 15
02.0	14 June 2004	EB 14, Annex 06b
01.0	03 August 2002	EB 05, Paragraph 12 Initial adoption.
Decision Class: Regulatory Document Type: Form Business Function: Registration Keywords: project activities, project design document		