

AM0009

Large-scale Methodology

Recovery and utilization of gas from oil fields that would otherwise be flared or vented

Version 07.0

Sectoral scope(s): 10



United Nations
Framework Convention on
Climate Change

TABLE OF CONTENTS	Page
1. INTRODUCTION	4
2. SCOPE, APPLICABILITY, AND ENTRY INTO FORCE	4
2.1. Scope	4
2.2. Applicability	4
2.3. Entry into force	5
3. NORMATIVE REFERENCES	5
3.1. Selected approach from paragraph 48 of the CDM modalities and procedures	5
4. DEFINITIONS	5
5. BASELINE METHODOLOGY	6
5.1. Project boundary	6
5.2. Identification of the baseline scenario and demonstration of additionality	8
5.2.1. Step 1 of the “Combined tool to identify the baseline scenario and demonstrate additionality”: Identification of alternative scenarios	8
5.2.2. Step 3 of the “Combined tool to identify the baseline scenario and demonstrate additionality”: Investment analysis	9
5.3. Baseline emissions	9
5.4. Project emissions	10
5.4.1. Project emissions from the consumption of fossil fuels	10
5.4.2. Project emissions from consumption of electricity	11
5.5. Leakage	11
5.5.1. Leakage emissions due to fossil fuel consumption	11
5.5.2. Leakage emissions due to electricity consumption	12
5.6. Emission reductions	12
5.7. Changes required for methodology implementation in 2 nd and 3 rd crediting periods	12
5.8. Project activity under a programme of activities (PoA)	12
5.9. Data and parameters not monitored	14
6. MONITORING METHODOLOGY	14

AM0009

Large-scale Methodology: Recovery and utilization of gas from oil fields that would otherwise be flared or vented

Version 07.0

Sectoral scope(s): 10

6.1.	Projection and adjustment of project and baseline emissions on the basis of oil production	14
7.	DATA AND PARAMETERS MONITORED	15

1. Introduction

1. The following table describes the key elements of the methodology:

Table 1. Methodology key elements

Typical projects	Associated gas from oil fields (including gas-lift gas) that was previously flared or vented is recovered and utilized
Type of GHG emissions mitigation action	Fuel switch. Displacement of use of other fossil fuel sources such as natural gas, dry gas, LPG, condensate etc. coming from non-associated gas by utilizing associated gas and/or gas-lift gas from oil fields

2. Scope, applicability, and entry into force

2.1. Scope

2. The methodology is applicable to project activities that recover and utilize the associated gas and/or gas-lift gas from oil fields.

2.2. Applicability

3. The methodology is applicable to project activities that recover and utilize the associated gas and/or gas-lift gas from oil fields that would have been either vented or flared in the absence of the project activity. The recovery may include the pre-treatment (compression and phase separation) in mobile or stationary equipment.
4. The methodology is applicable under the following conditions:
 - (a) Under the project activity the recovered gas is transported to a gas pipeline with or without prior processing. Prior processing may include transportation to a processing plant where the recovered gas is processed into hydrocarbon products (e.g. dry gas, liquefied petroleum gas (LPG)). The dry natural gas is either: (i) transported to a gas pipeline directly; or (ii) compressed to CNG first, then transported by trailers/trucks/carriers and then decompressed again; and/or
 - (b) All recovered gas comes from oil wells that are in operation and are producing oil at the time of the recovery of the associated gas and/or gas-lift gas;
 - (c) Partial amount of the associated gas and/or gas-lift gas can be used on-site to meet on-site energy demands, i.e. to run auxiliary equipment prior to the implementation of the project activity and after the implementation of the project activity.
5. In addition, the applicability conditions included in the tools referred to above apply.
6. Finally, this methodology is only applicable if the application of the procedure to identify the baseline scenario and demonstrate additionality results in the venting and/or flaring of the associated gas and/or gas-lift gas at the oil production facility as the most plausible baseline scenario.

2.3. Entry into force

7. The date of entry into force of the revision is the date of the publication of the EB 76 meeting report on 8 November 2013.

3. Normative references

8. This baseline and monitoring methodology is based on elements from the following proposed methodologies:
 - (a) “NM0026: Rang Dong Oil Field Associated Gas Recovery and Utilization Project” prepared by Japan Vietnam Petroleum Co. Ltd;
 - (b) “NM0227: Recovery of methane from on- and off-shore oil fields that otherwise will be vented into the atmosphere” prepared by SOCAR in collaboration with ICF International.
9. This methodology also refers to the latest approved versions of the following tools:
 - (a) “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion”;
 - (b) “Tool to calculate baseline, project and/or leakage emissions from electricity consumption”;
 - (c) “Tool for the demonstration and assessment of additionality”;
 - (d) “Combined tool to identify the baseline scenario and demonstrate additionality”;
 - (e) The methodological tool “Assessment of the validity of the original/current baseline and to update of the baseline at the renewal of the crediting period”.
10. For more information regarding the proposed new methodologies and the tools as well as their consideration by the Executive Board (hereinafter referred to as the Board) of the clean development mechanism (CDM) please refer to <<http://cdm.unfccc.int/goto/MPappmeth>>.

3.1. Selected approach from paragraph 48 of the CDM modalities and procedures

11. “Existing actual or historical emissions, as applicable”;
and
12. “Emissions from a technology that represents an economically attractive course of action, taking into account barriers to investment”.

4. Definitions

13. The definitions contained in the Glossary of CDM terms shall apply.
14. For the purpose of this methodology, the following definitions apply:
 - (a) **Associated gas** - natural gas found in association with oil, either dissolved in the oil or as a cap of free gas above the oil;

- (b) **Gas-lift** - an artificial lift method for oil wells exploitation in which gas is injected into the production tubing to reduce the hydrostatic pressure of the fluid column. The resulting reduction in bottomhole pressure allows the reservoir liquids to enter the wellbore at a higher flow rate;
- (c) **Gas-lift gas** - high-pressure gas used for gas-lift in the oil wells;
- (d) **Recovered gas** - the associated gas and/or gas-lift gas recovered from the oil wells;
- (e) **Processing plant** - a facility designed to separate or process hydrocarbons through chemical, physical or physical-chemical procedures in order to produce marketable hydrocarbon and other (e.g. sulphur) products;
- (f) **Compressed natural gas (CNG)** - the processed gas that has been compressed to high pressure (typically > 200 bar) for the purpose of storage and/or transportation;
- (g) **Gas pipeline** - the pipeline with capacity to transport more than 1 million Nm³ of gas per day;
- (h) **Oil field** – an area of land or seabed containing reserves of petroleum deposits, secured under concession for the purpose of extracting oil.

5. Baseline methodology

5.1. Project boundary

15. The project boundary encompasses:
 - (a) The project oil field and oil wells where the associated gas and/or gas-lift gas is collected;
 - (b) The site where the associated gas and/or gas-lift gas would have been flared or vented in the absence of the project activity;
 - (c) The gas recovery, pre-treatment, transportation infrastructure, including where applicable, compressors;
 - (d) The source of gas-lift gas.
16. The greenhouse gases included in or excluded from the project boundary are shown in Table 2.

Table 2. Emission sources included in or excluded from the project boundary

Source		Gas	Included	Justification/Explanation
Baseline	Combustion of fossil fuels at end-users that are produced from non-associated gas or other fossil sources	CO ₂	Yes	Main source of emissions in the baseline
		CH ₄	No	Excluded for simplification. This is conservative
		N ₂ O	No	Excluded for simplification. This is conservative

Source		Gas	Included	Justification/Explanation
Project activity	Energy use for the recovery, pre-treatment, transportation, and if applicable, compression/decompression, transportation of the recovered gas	CO ₂	Yes	Main source of emissions in the project
		CH ₄	No	Excluded for simplification. This emission source is assumed negligible
		N ₂ O	No	Excluded for simplification. This emission source is assumed negligible

Figure 1. Schematic illustration of the baseline activity

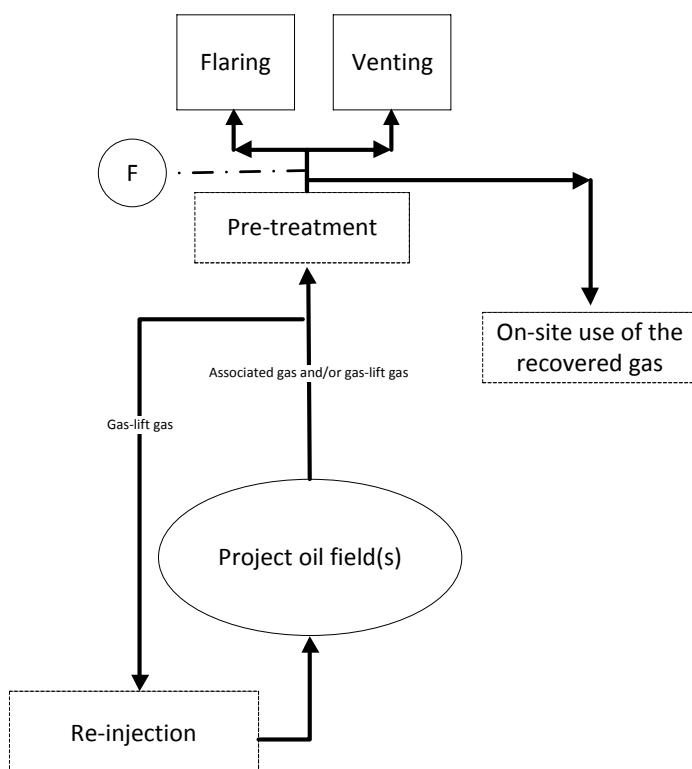
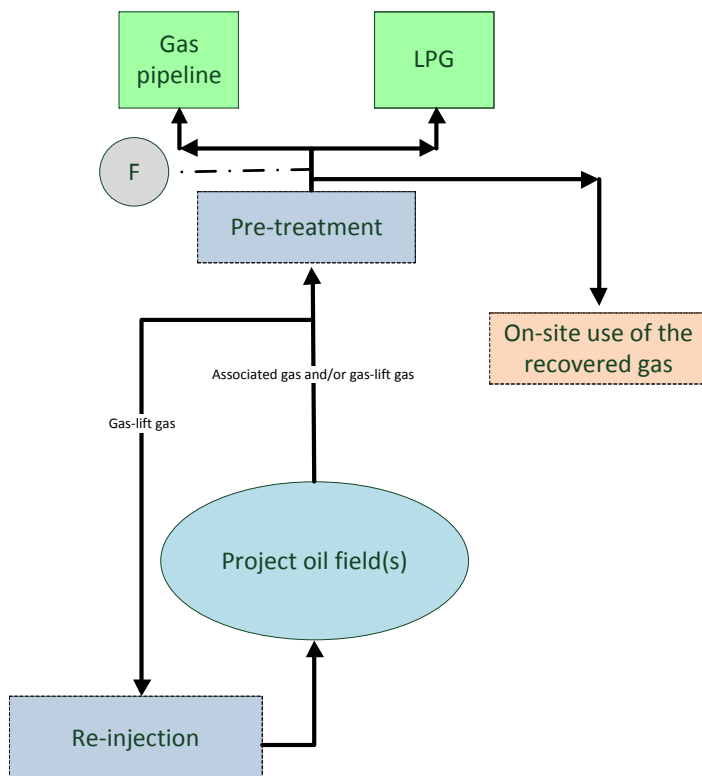


Figure 2. Schematic illustration of the project activity

17. The project area may encompass several wells in oil field under a production sharing contract (PSC) with a production target.

5.2. Identification of the baseline scenario and demonstration of additionality

18. Project participants shall apply the latest approved version of the “Combined tool to identify the baseline scenario and demonstrate additionality” with the following additional guidance to identify the baseline scenario and demonstrate additionality:

5.2.1. Step 1 of the “Combined tool to identify the baseline scenario and demonstrate additionality”: Identification of alternative scenarios

19. Plausible alternative scenarios should include, at least, the following alternatives:
- (a) The project activity not implemented as a CDM project;
 - (b) Venting and/or flaring of the associated gas and/or gas-lift gas at the oil production facility;
 - (c) All other plausible and credible alternatives to the project activity. Such alternatives may include, for example, recovery and use of the associated gas and/or gas-lift gas:

- (i) In chemical industry;
- (ii) To produce heat and/or electricity;
- (iii) To use on-site.

20. The alternative scenario (b) can include the use of the partial amount of the associated gas and/or gas-lift gas to meet on-site energy demands (i.e. to run auxiliary equipment).

5.2.2. Step 3 of the “Combined tool to identify the baseline scenario and demonstrate additionality”: Investment analysis

21. If this option is used, apply the following:

- (a) Apply an investment comparison analysis, as per Step 3 of the “Combined tool to identify the baseline scenario and demonstrate additionality”, if more than one alternative is remaining after Step 2 and if the remaining alternatives include scenario (a) and (c);
- (b) Apply a benchmark analysis, as per Step 2(b) of the “Tool for the demonstration and assessment of additionality”, if two alternatives are remaining after Step 2 and if the remaining alternatives are scenarios (b) and either (a) or (c).

22. If venting or flaring of the associated gas in a host party is not prohibited by law, but instead is subject to taxes or fines, the impact of these taxes and fines should be taken into account.

23. Revenues and avoided cost from using the recovered gas to meet the energy demand on-site shall be included in the investment analysis, where applicable.

24. This methodology is only applicable if the application of the procedure to identify the baseline scenario and demonstrate additionality results in the venting and/or flaring of the associated gas and/or gas-lift gas at the oil production facility as the most plausible baseline scenario.

5.3. Baseline emissions

25. Project activities under this methodology reduce emissions utilizing the recovered gas. The utilization of the recovered gas displaces the use of other fossil fuel sources. For example:

- (a) The use of recovered gas in a plant displaces the use of non-associated gas in that plant;
- (b) The injection of the recovered gas into a natural gas pipeline displaces the natural gas.

26. For the recovered gas that is used under the project activity (e.g. injection into the natural pipeline, compressed to CNG) the exact emission effects are difficult to determine and would require an analysis of the whole fuel supply chain up to the end-users for both the project activity and the baseline scenario. This methodology provides a simplified and conservative approach, assuming that the use of the recovered gas displaces the use of methane – the fossil fuel with the lowest direct CO₂ emissions. Emissions from processing and transportation of fuels to end-users are neglected for

both the project activity and the baseline scenario, as it is assumed that these emissions are similar in their magnitude and level out.

$$BE_y = V_{F,y} \times NCV_{RG,F,y} \times EF_{CO_2,Methane} \quad \text{Equation (1)}$$

Where:

BE_y	=	Baseline emissions in year y , (t CO ₂ e)
$V_{F,y}$	=	Volume of total recovered gas measured at point F in Figure 2 in year y (Nm ³)
$NCV_{RG,F,y}$	=	Average net calorific value of recovered gas at point F in Figure 2 in year y (TJ/Nm ³)
$EF_{CO_2,Methane}$	=	CO ₂ emission factor for methane (t CO ₂ /TJ)

5.4. Project emissions

27. The following sources¹ of project emissions are accounted in this methodology:

- (a) CO₂ emissions due to consumption of fossil fuels for the recovery, pre-treatment, transportation, and, if applicable, compression of the recovered gas up to the point F in Figure 2;
- (b) CO₂ emissions due to the use of electricity for the recovery, pre-treatment, transportation, and, if applicable, compression of the recovered gas up to the point F in Figure 2.

28. Project emissions are calculated as follows:

$$PE_y = PE_{CO_2,fossil\ fuels,y} + PE_{CO_2,elec,y} \quad \text{Equation (2)}$$

Where:

PE_y	=	Project emissions in year y , (t CO ₂ e)
$PE_{CO_2,fossil\ fuels,y}$	=	CO ₂ emissions due to consumption of fossil fuels for the recovery, pre-treatment, transportation, and, if applicable, compression of the recovered gas up to the point F in Figure 2 in year y (t CO ₂ e)
$PE_{CO_2,elec,y}$	=	CO ₂ emissions due to the use of electricity for recovery, pre-treatment, transportation and, if applicable, compression of the recovered gas up to the point F in Figure 2 in year y , (t CO ₂ e)

5.4.1. Project emissions from the consumption of fossil fuels

29. Project emissions $PE_{CO_2,fossil\ fuels,y}$ due to the consumption of fossil fuels, including the recovered gas if applicable, for the recovery, pre-treatment, transportation and, if

¹ Other sources of project emissions such as emissions from leaks, venting and flaring during the recovery, transportation and processing of recovered gas are assumed to be of similar magnitude in the baseline scenario.

applicable, compression of the recovered gas are calculated applying the latest approved version of the “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion” where $PE_{CO2,fossilfuels,y}$ corresponds to $PE_{FC,j,y}$ in the tool and process j corresponds to all sources of fuel combustion (e.g. a compressor, etc.) up to point F in Figure 2. All applicable emission sources should be documented transparently in the CDM-PDD and in monitoring reports.

5.4.2. Project emissions from consumption of electricity

30. Project emissions $PE_{CO2,elec,y}$ due to the use of electricity for the recovery, pre-treatment, transportation, and if applicable, compression of the recovered gas are calculated applying the latest approved version of the “Tool to calculate baseline, project and/or leakage emissions from electricity consumption” where $PE_{CO2,elec,y}$ corresponds to $PE_{EC,y}$ in the tool and the electricity consumption sources j in the tool corresponds to all sources of electricity consumption (e.g. a compressor, etc.) up to point F in Figure 2. All applicable sources of electricity consumption should be documented transparently in the CDM-PDD and in monitoring reports.

5.5. Leakage

31. Leakage emissions shall be accounted for project activities where the recovered gas is transported to a processing plant where it is processed into hydrocarbon products (e.g. dry gas, LPG and condensates) and the dry gas is compressed to CNG first, then transported by trailers/trucks/carriers and then decompressed again, before it finally enters the gas pipeline. For other types of project activities, leakage emissions need not to be considered.
32. Leakage emission is calculated as follows:

$$LE_y = LE_{FC,y} + LE_{EC,y} \quad \text{Equation (3)}$$

Where:

LE_y	=	Leakage emissions in year y (t CO ₂ e)
$LE_{FC,y}$	=	Leakage emissions due to fossil fuel consumption after point F in Figure 2 in year y (t CO ₂ e)
$LE_{EC,y}$	=	Leakage emissions due to electricity consumption after point F in Figure 2 in year y (t CO ₂ e)

5.5.1. Leakage emissions due to fossil fuel consumption

33. Leakage emissions due to fossil fuel consumption in year y ($LE_{FC,y}$) is calculated applying the latest approved version of the “Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion” where $LE_{FC,y}$ corresponds to $PE_{FC,j,y}$ in the tool and process j corresponds to all sources of fuel combustion (e.g. compressor, de-compressor or trailers/trucks/carriers etc.) after point F in Figure 2. All emission sources of fuel consumptions should be documented transparently in the CDM-PDD and in monitoring reports.

5.5.2. Leakage emissions due to electricity consumption

34. Leakage emissions due to electricity consumption in year y ($LE_{EC,y}$) is calculated applying the latest approved version of the “Tool to calculate baseline, project and/or leakage emissions from electricity consumption” where $LE_{EC,y}$ corresponds to $PE_{EC,y}$ in the tool and the electricity consumption sources j in the tool corresponds to all sources of electricity consumption (e.g. compressor, de-compressor or trailers/trucks/carriers etc.) after point F in Figure 2. All emission sources of electricity consumption should be documented transparently in the CDM-PDD and in monitoring reports.

5.6. Emission reductions

35. Emission reductions are calculated as follows:

$$ER_y = BE_y - PE_y - LE_y \quad \text{Equation (4)}$$

Where:

ER_y	=	Emission reductions in year y (t CO ₂ e)
BE_y	=	Baseline emissions in year y (t CO ₂ e)
PE_y	=	Project emissions in year y (t CO ₂ e)
LE_y	=	Leakage emissions in year y (t CO ₂ e)

5.7. Changes required for methodology implementation in 2nd and 3rd crediting periods

36. Refer to the methodological tool “Assessment of the validity of the original/current baseline and to update of the baseline at the renewal of the crediting period”.

5.8. Project activity under a programme of activities (PoA)

37. In addition to the requirements set out in the latest approved version of the “Standard for demonstration of additionality, development of eligibility criteria and application of multiple methodologies for programme of activities”, the following shall be applied for the use of this methodology in a project activity under a programme of activities (PoAs).
38. The PoA may consist of one or several types of CPAs. CPAs are regarded to be of the same type if they are similar with regard to the demonstration of additionality, emission reduction calculations and monitoring. The CME shall describe in the CDM-PoA-DD for each type of CPAs separately:
- Eligibility criteria for CPA inclusion used for each type of CPAs. In case of combination of the types of use of the recovered gas in one CPA, the eligibility criteria shall be defined for each type of use of the recovered gas, separately;
 - Emission reduction calculations for each type of CPAs;
 - Monitoring provisions for each type of CPAs.

39. The CME shall describe transparently and justify in the CDM-PoA-DD which CPAs are regarded to be of the same type. CPAs are not regarded to be of the same type, if one of the following conditions is different:
- (a) The baseline scenario with regard to any of the following aspects:
 - (i) On-site use of the partial amount of associated gas and/or gas-lift gas to meet on-site energy and the rest of the gas are either vented or flared;
 - (ii) In case of different types of products, recovery, transportation and utilization of the associated gas and/or gas-lift gas as feedstock for manufacturing of useful products;
 - (b) The project activity with regard to any of the following aspects of the use of the recovered gas:
 - (i) Consumed on-site to meet energy demands;
 - (ii) Transported to a gas pipeline without prior processing;
 - (iii) Transported to a processing plant where it is processed into hydrocarbon products (e.g. dry gas, LPG and condensates). The dry gas is either:
 - a. Transported to a gas pipeline directly, or
 - b. Compressed to CNG first, then transported by trailers/trucks/carriers and then decompressed again, before it finally enters the gas pipeline.
 - (iv) Combination of any above.
40. When defining eligibility criteria for CPA inclusion for a distinct type of CPAs, the CME shall consider relevant technical and economic parameters, such as:
- (a) Ranges of overall projected production of associated gas and/or gas-lift gas;
 - (b) Ranges of projected quantity of gas recovered, gas flared, vented, consumed on-site, processed in a gas processing plant and/or compressed into a pipeline;
 - (c) Ranges of price for the delivery of recovered gas;
 - (d) Ranges of net calorific value of the recovered gas;
 - (e) Ranges of capital expenditure for gas infrastructure needed in the relevant scenario, such as gas recovery facilities, pipelines, and gas processing plant (if applicable) etc.;
 - (f) Ranges of operational expenditure;
 - (g) Ranges of revenues from the operation of the alternative scenario, such as revenues from selling processed gas or other products of the gas processing plant or electricity.
41. When Option (ii) in the latest approved version of the “Standard for demonstration of additionality, development of eligibility criteria and application of multiple methodologies for programmes of activities” is applied, which is related to defining technical and

economic criteria as ranges of values for each input parameter required for the inclusion of the CPA in the PoA-DD, the eligibility criteria related to the costs and revenues parameters shall be updated every two years in order to correctly reflect the technical and market circumstances of a CPA implementation.

5.9. Data and parameters not monitored

42. In addition to the parameters listed in the tables below, the provisions on data and parameters not monitored in the tools referred to in this methodology apply.

Data / Parameter table 1.

Data / Parameter:	EF _{CO2,Methane}														
Data unit:	t CO ₂ /TJ														
Description:	CO ₂ emission factor for methane														
Source of data:	<div>Calculated in line with procedures and data presented in ISO 6976:</div> <div>Table 3. Carbon content, CO₂ emission factor and NCV of methane</div> <table><tr><th>Unit</th><th>Value</th><th>Source</th></tr><tr><td>Carbon Content of Methane</td><td>12,011 kg/kmol</td><td>ISO 6976: Table 1</td></tr><tr><td>CO₂ Emission Factor for Methane</td><td>44.01 kg/kmol</td><td>ISO 6976: Table 1</td></tr><tr><td>NCV of Methane (at 25⁰C)</td><td>802.60 kJ/mol</td><td>ISO 6976: Table 3</td></tr></table>			Unit	Value	Source	Carbon Content of Methane	12,011 kg/kmol	ISO 6976: Table 1	CO ₂ Emission Factor for Methane	44.01 kg/kmol	ISO 6976: Table 1	NCV of Methane (at 25 ⁰ C)	802.60 kJ/mol	ISO 6976: Table 3
Unit	Value	Source													
Carbon Content of Methane	12,011 kg/kmol	ISO 6976: Table 1													
CO ₂ Emission Factor for Methane	44.01 kg/kmol	ISO 6976: Table 1													
NCV of Methane (at 25 ⁰ C)	802.60 kJ/mol	ISO 6976: Table 3													
Value to be applied:	54.834 t CO ₂ /TJ														
Any comment:	-														

6. Monitoring methodology

43. All data collected as part of monitoring should be archived electronically and be kept at least for two years after the end of the last crediting period. One hundred per cent of the data should be monitored if not indicated otherwise in the tables below. All measurements should be conducted with calibrated measurement equipment according to relevant industry standards.
44. The CDM-PDD will have to include minimal procedures to ensure that the data collection and retention will be made properly.
45. In addition, the monitoring provisions in the tools referred to in this methodology apply.

6.1. Projection and adjustment of project and baseline emissions on the basis of oil production

46. Project as well as baseline emissions depend on the quantity of associated gas and gas-lift gas recovered, which is linked to the oil production. Oil production may be projected with the help of a reservoir simulator, reflecting the rock and fluid properties in the oil reservoir. As projections of the oil production, the methane content of the gas and other parameters involve a considerable degree of uncertainty, the quantity and composition

of the recovered gas are monitored ex post and baseline and project emissions are adjusted respectively during monitoring.

47. The validating DOE shall confirm that estimated emission reductions reported in the CDM-PDD are based on estimates provided in the survey used for defining the terms of the underlying oil production project as per the relevant documents such as production sharing contract, data room and operational production plan approved by national authority, etc.

7. Data and parameters monitored

Data / Parameter table 2.

Data / Parameter:	$V_{F,y}$
Data unit:	Nm ³
Description:	Volume of the total recovered gas measured at point <i>F</i> in Figure 2 in year <i>y</i>
Source of data:	Flow meter (e.g. diaphragm gauge)
Measurement procedures (if any):	Data should be measured using calibrated flow meters. Measurements should be taken at the point(s) where the recovered gas exits the pre-treatment plant and after the point where the recovered gas is directed for on-site use
Monitoring frequency:	Continuously
QA/QC procedures:	Volume of gas should be completely metered with regular calibration of metering equipment. The measured volume should be converted to the volume at normal temperature and pressure using the temperature and pressure at the time to measurement
Any comment:	-

Data / Parameter table 3.

Data / Parameter:	$NCV_{RG,F,y}$
Data unit:	TJ/Nm ³
Description:	Average net calorific value of recovered gas at point <i>F</i> in Figure 2 in year <i>y</i>
Source of data:	On site measurement (Chemical analysis of gas samples taken at point <i>F</i> in Figure 2)
Measurement procedures (if any):	Measurements should be undertaken in line with national or international fuel standards. Gas samples should regularly be taken at point <i>F</i> in Figure 2 and the molar composition of each gas sample should be determined through chemical analysis following the procedures for QA/QC. Based on the molar composition, the Net Calorific Value on a volumetric basis should be determined for each sample in line with ISO 6976 or an equivalent standard for a combustion reference temperature of 25°C and the same metering reference condition used for parameter $V_{F,y}$. The average NCV during the period <i>y</i> is defined as the arithmetic average of NCVs for the samples taken during the same period
Monitoring frequency:	Sampling and compositional analysis and calculation of net calorific value at least monthly

QA/QC procedures:	Sampling in accordance with ISO 10715 or equivalent standard. Compositional analysis in accordance with ISO 6974 or equivalent standard. Routine maintenance and calibration in accordance with ISO 10723 or equivalent standard. GC calibration gases certified to ISO 6141 or equivalent standard. Annual manufacturer servicing and calibration to ISO17025 or equivalent standard. In case third party laboratories are used, these should as a minimum have ISO17025 accreditation or justify that they can comply with similar quality standards
Any comment:	For the purpose of this methodology, the qualifier “net” is synonymous with “lower” and “inferior”, and the term “calorific value” is synonymous with “heating value”

- - - - -

Document information

<i>Version</i>	<i>Date</i>	<i>Description</i>
07.0	8 November 2013	EB 76, Annex 5 Revision to: <ul style="list-style-type: none"> Remove requirements for specific case CPA-DDs and frequency of updating of eligibility criteria as these requirements are specified in the relevant standards; Simplify and streamline the procedure for the identification of the baseline scenario and demonstration of additionality; Change the title from “AM0009: Recovery and utilization of gas from oil wells that would otherwise be flared or vented” to “AM0009: Recovery and utilization of gas from oil fields that would otherwise be flared or vented”.
06.0.0	20 July 2012	EB 68, Annex 7 Revision to: <ul style="list-style-type: none"> Clarify that the leakage emissions shall only be accounted for in project activities where the recovered gas is transported to a processing plant where it is processed into hydrocarbon products (e.g. dry gas, LPG and condensates) and where the dry gas is compressed to CNG, transported by trailers/trucks/carriers and then decompressed again, before it finally enters the gas pipeline; and Introduce provisions for the use of this methodology in a project activity under a PoA.

AM0009

Large-scale Methodology: Recovery and utilization of gas from oil fields that would otherwise be flared or vented

Version 07.0

Sectoral scope(s): 10

<i>Version</i>	<i>Date</i>	<i>Description</i>
05.0.1	2 March 2012	<p>EB 66, Annex 41</p> <p>Editorial amendment to:</p> <ul style="list-style-type: none">• Correct the reference of common practice analysis;• Correct the description of $V_{F,y}$ and description of point F in Figure 2 throughout the methodology; and• Update the title of the methodological tool “Assessment of the validity of the original/current baseline and to update of the baseline at the renewal of the crediting period”.
05.0.0	25 November 2011	<p>EB 65, Annex 11</p> <p>Revision to expand the applicability of the methodology to situations where:</p> <ul style="list-style-type: none">• The associated gas and/or gas-lift gas is partially recovered and utilized on-site before the implementation of the project activity;• Pre-treatment is done by movable or stationary equipments;• Recovered gas is first compressed to Compressed Natural Gas (CNG), then transported via trailers or carriers, and later decompressed and gasified before it finally enters the gas pipelines to end-users; <p>Additionally, revision to:</p> <ul style="list-style-type: none">• Provide definition of CNG and gas pipeline;• Include leakage emissions due to the use of fossil fuels and/or electricity due to the compression, transportation and decompression of CNG;• Update the schematic illustration of baseline and project activity to reflect above changes;• Update the monitoring tables by revising (i) the CO₂ emission factor for methane, and (ii) the measurement procedures and QA/QC procedures for net calorific value of recovered gas; and• Remove reference to the “Combined tool to identify the baseline scenario and demonstrate additionality”;• Add reference to the tool “Validity of the original/current baseline and to update the baseline at the renewal of a crediting period”.

AM0009

Large-scale Methodology: Recovery and utilization of gas from oil fields that would otherwise be flared or vented

Version 07.0

Sectoral scope(s): 10

<i>Version</i>	<i>Date</i>	<i>Description</i>
04.0	25 March 2009	<p>EB 46, Annex 5</p> <p>Revision to:</p> <ul style="list-style-type: none">• Expand the scope of the methodology by allowing the use of gas coming to the surface from gas-lift systems;• Modify the project activity diagram;• Adjust the table for emission sources in the project boundary section;• Include provisions to identify plausible alternative baseline scenarios for a gas processing facility and gas-lift gas;• Simplify the procedure to calculate baseline emissions;• Neglect project emissions related to gas leaks, venting and flaring during the recovery, transport and processing of the recovered gas;• Eliminate the leakage emissions section; and• Eliminate the uncertainty assessment section.
03.3	28 November 2008	<p>EB 44, Annex 6</p> <p>Editorial revision to delete the term 'transportation' from the section "CH₄ project emissions from venting, leak or flaring of the associated gas".</p>
03.2	26 September 2008	<p>EB 42, Annex 4</p> <p>Editorial revision to correct equation 3 under project emissions.</p>
03.1	16 May 2008	<p>EB 39, Paragraph 22</p> <p>"Tool to calculate baseline, project and/or leakage emissions from electricity consumption" replaces the withdrawn "Tool to calculate project emissions from electricity consumption".</p>
03.0	30 November 2007	<p>EB 36, Annex 6</p> <p>Revision to:</p> <ul style="list-style-type: none">• Expand the applicability of the methodology by introducing a new baseline scenario where the associated gas is vented in the absence of the project activity;• Introduce an option of supplying part of the captured gas directly to the existing natural gas grid without processing;• Introduce project emissions from the use of electricity and fossil fuels for project activities where electricity and fossil fuels are used for capture, transportation and processing of the associated gas;• Incorporate "Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion", "Tool to calculate project emissions from electricity consumption" and "Combined tool to identify the baseline scenario and demonstrate additionality".

AM0009

Large-scale Methodology: Recovery and utilization of gas from oil fields that would otherwise be flared or vented

Version 07.0

Sectoral scope(s): 10

<i>Version</i>	<i>Date</i>	<i>Description</i>
02.1	22 June 2007	<p>The methodology was editorially revised to add the guidance provided by the Board at its thirty-second meeting (paragraph 23 of thirty-second meeting report) in the following sections:</p> <ul style="list-style-type: none">• Projection and adjustment of project and baseline emissions; and• Note below the QA/QC table (on Page 15). <p>Guidance by the Board:</p> <p>“The Board clarified that the validating DOE shall confirm that estimated flare reduction in the CDM-PDD for project activities using approved methodology AM0009 are based on estimates provided in the survey used for defining the terms of the underlying oil production project. At verification the DOE shall check the production data for oil and associate gas and compare it with initial production target. If the oil production differs significantly from initial production target, then it should be checked upon verification that this is not intentional, and that such a scenario is properly addressed by the contract between the contracted party(ies).”</p>
02.0	13 May 2005	<p>EB 19, Annex 5</p> <p>Revision to introduce project emissions from the transportation of the associated gas and project emissions from accidents.</p>
01.0	26 March 2004	<p>EB 13, Annex 3</p> <p>Initial adoption.</p>

Decision Class: Regulatory
Document Type: Standard
Business Function: Methodology
Keywords: fuel switching, gas recovery, pipeline
