

**MONITORING REPORT FORM (CDM-MR)**  
**Version 01 - in effect as of: 28/05/2010****CONTENTS**

- A. General description of the project activity
  - A.1. Brief description of the project activity
  - A.2. Project participants
  - A.3. Location of the project activity
  - A.4. Technical description of the project
  - A.5. Title, reference and version of the baseline and monitoring methodology applied to the project activity
  - A.6. Registration date of the project activity
  - A.7. Crediting period of the project activity and related information
  - A.8. Name and responsible person(s)/entity(ies)
- B. Implementation of the project activity
  - B.1. Implementation status of the project activity
  - B.2. Revision of the monitoring plan
  - B.3. Request for deviation applied to this monitoring period
  - B.4. Notification or request of approval of changes
- C. Description of the monitoring system
- D. Data and parameters monitored
  - D.1. Data and parameters used to calculate baseline emissions
  - D.2. Data and parameters used to calculate project emissions
  - D.3. Data and parameters used to calculate leakage emissions
  - D.4. Other relevant data and parameters
- E. Emission reductions calculation
  - E.1. Baseline emissions calculation
  - E.2. Project emissions calculation
  - E.3. Leakage calculation
  - E.4. Emission reductions calculation
  - E.5. Comparison of actual emission reductions with estimates in the registered CDM-PDD
  - E.6. Remarks on difference from estimated value

**MONITORING REPORT  
VERSION 1 – 29/09/2010****“N<sub>2</sub>O EMISSION REDUCTION IN ONSAN, REPUBLIC OF KOREA”  
UNFCCC 0099  
MONITORING REPORT # 41 (from 01/09/2010 to 26/09/2010)****SECTION A. General description of the project activity****A.1. Brief description of the project activity:**

Nitrous oxide (N<sub>2</sub>O) is a by-product of adipic acid production. It is of low toxicity but is a greenhouse gas (GHG), whose GWP is large (GWP=310 in the IPCC 2nd Assessment Report). Emissions of N<sub>2</sub>O are controlled under the Kyoto Protocol and there are no national or regional regulations or restrictions on the emission of N<sub>2</sub>O in Korea.

In this project, a thermal decomposition process equipment has been added to the adipic acid manufacturing plant. This installation reduces the GHG emissions, which would otherwise be released to the atmosphere if the project were not implemented.

The thermal decomposition facility was installed and commissioned in the manufacturing site of Onsan Rhodia Poliamide Co. Ltd. in May 2006 and the destruction of N<sub>2</sub>O was started in September 2006. The N<sub>2</sub>O destruction unit is in continuous operation since its start-up and has only stopped for short periods due to planned and corrective maintenance operations.

In this monitoring period #41 the destruction unit has been operated continuously. The emission reductions achieved in this period are: 1,018,550 tCO<sub>2</sub>e

**A.2. Project Participants**

KEMCO (Korea Energy Management Corporation)  
Rhodia Energy Korea Co.,Ltd,  
Rhodia Energy SAS, Rhodia Energy GHG SAS  
Rhodia Japan Ltd,  
ORBEO  
NATIXIS, Natixis Environment and Infrastructures,  
Société Generale  
Noble Carbon Credits

**A.3. Location of the project activity:**

Host Party: The Republic of Korea  
Region: Ulju-gun, Ulsan  
City: Onsan  
GPS coordinates: 35.412778 129.341667

#### A.4. Technical description of the project

A thermal oxidizer with 2 chambers is the technology used to decompose N<sub>2</sub>O at the Rhodia Onsan site.


Natural gas is fed with the off gas from the adipic acid production containing N<sub>2</sub>O and some air in a reduction chamber, where it burns (oxidizes) to carbon dioxide (CO<sub>2</sub>) and water vapour. N<sub>2</sub>O is used as an oxidizer. Being oxygen deficient, the oxidation is not complete and carbon monoxide and hydrogen are present.



The temperature in the furnace is kept at about 1300°C and under fuel rich conditions, so as to promote the complete decomposition of N<sub>2</sub>O while minimizing the formation of unwanted combustion by-products such as NO and NO<sub>2</sub>.

The gas is then quenched with air to complete the combustion of carbon monoxide and hydrogen at a temperature of about 950°C in a second chamber. Steam and ammonia are injected to control the emission of NO and NO<sub>2</sub>.

Before release to the stack, the flue gas coming from the thermal oxidizer is used to produce saturated steam, which is fed into the existing on-site steam network.

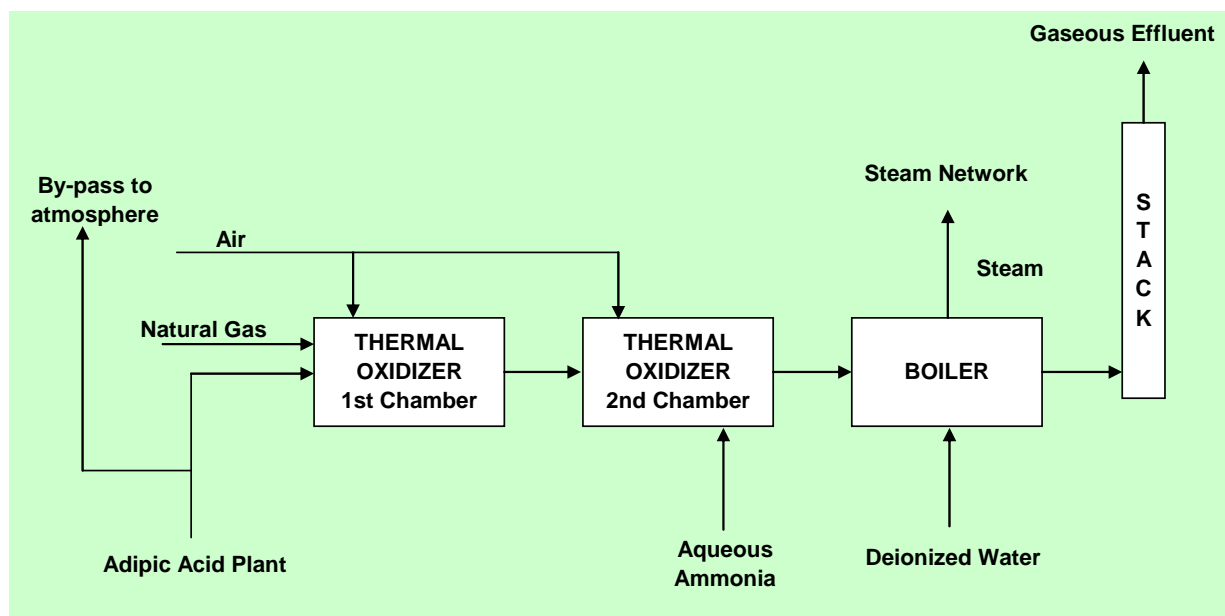

**A.5. Title, reference and version of the baseline and monitoring methodology applied to the project activity:**

Approved baseline and monitoring methodology:

AM0021/version 1 – “Baseline Methodology for decomposition of N<sub>2</sub>O from existing adipic acid production plants”

Referenced Tool(s):

- EB 47 Annex 10 “Tool to determine the mass flow for GHG gaseous streams” version 1, 28/05/2009
- ACM0002/version 2 – “Consolidated methodology for Grid-Connected electricity generation from renewable resources” – Calculation of the CO<sub>2</sub> emission factor of the power generation

Project Design Document:

N<sub>2</sub>O Emission Reduction in Onsan, Republic of South Korea.

Version number of the document: 8

Date: 01/09/2005

EB guidance directly related to adipic acid production:

EB45 Annex13 “Guidance to calculate adipic acid production in cases where it cannot be measured directly” version 1, 13/02/2009

**A.6. Registration date of the project activity:**

The project was registered by the UNFCCC on 27/11/2005.

**A.7. Crediting period of the project activity and related information (start date and choice of crediting period):**

The first crediting period (on-going) is from 01/09/2006 to 31/08/2013 (renewable).

**A.8. Name of responsible person(s)/entity(ies):**

Pascal Siegwart, Rhodia Energy GHG  
Tour La Pacific. 11, cours Valmy La Defense 7  
92977 Paris La Defense, France  
TEL : +33 1 53 56 61 02  
FAX : +33 1 53 56 61 10

**SECTION B. Implementation of the project activity****B.1. Implementation status of the project activity**

The project is fully implemented according to the description presented in the PDD. The project activity is completely operational since the start date of operation on 01/09/2006.

During this monitoring period # 41 the N<sub>2</sub>O destruction unit was fully operational and no particular event occurred that could impact the applicability of the methodology.

**B.2. Revision of the monitoring plan**

No revision to the monitoring plan has been sought since the beginning of project activity.

**B.3. Request for deviation applied to this monitoring period**


No request for deviation of the approved methodology was applied to this monitoring period.

**B.4. Notification or request of approval of changes**

No changes to the project activity as described in the registered CDM-PDD have been requested.

## SECTION C. Description of the monitoring system

The project boundary related to the baseline methodology is shown below with the measured parameters in green color.

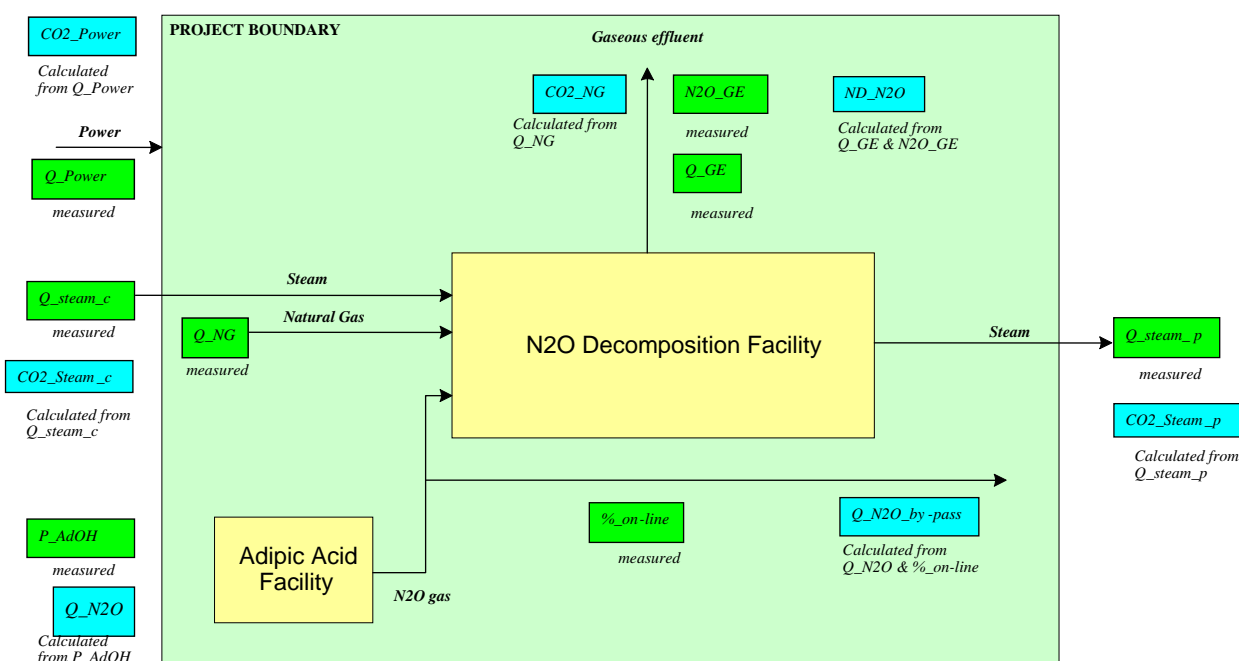

All data collection procedures, the organizational structure, the roles and responsibilities and procedures for dealing with abnormal situations are described in detail in the Data Handling Protocol and Data Review Protocol which are documents of Rhodia Quality System. Rhodia Onsan plant is ISO9001 and ISO14001 certified.

The Adipic Acid Plant Manager is responsible for implementing and maintaining the monitoring procedures on site (Data Handling Protocol, training, calibration and maintenance, data review) and for validating all data. The overall responsibility of the project belongs to the CO<sub>2</sub> Operations Director of Rhodia Energy GHG located in Paris, France.


All the data used for monitoring the baseline, project and leakage emissions are collected in the PIMS (Plant Information Management System). Two types of data are stored in the PIMS:

- Process data (flow rates, pressures, temperatures etc.) are continuously acquired by the DCS (Distributed Control System) and automatically stored by the PIMS;
- Packaged dry adipic acid production data are obtained from dedicated excel files and are manually entered into the PIMS database every working day by the authorized staff.

All measuring instruments used in this project are calibrated and maintained according to the specifications provided by the manufacturers and/or the relevant national standards.

The calculation of the daily production of adipic acid and of the nitric acid consumption is carried out using the data stored in PIMS. The results obtained are transferred to the SAP (System, Applications and products for Data Processing) system which is the official system used by Rhodia for production management and accounting purposes.

The emission reductions calculations are performed in a dedicated excel spreadsheet called the Workbook. Data are periodically extracted from PIMS using an excel tool and transferred to the Workbook. Some external data are input directly into the Workbook (e.g.: natural gas composition). The calculations made in the Workbook are used for the preparation of the monitoring report. The following diagram illustrates the entire process of data acquisition, storage and transfer to the Workbook and preparation of the monitoring report:

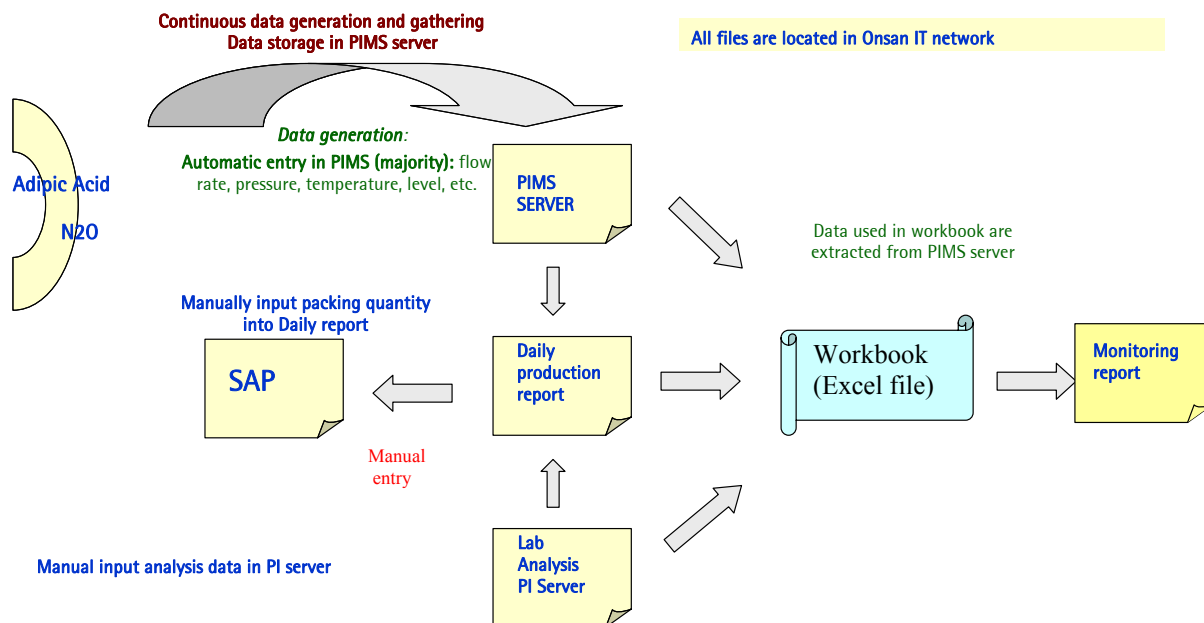

**SECTION D. Data and parameters****D.1 Data and parameters determined at registration and not monitored during the monitoring period, including default values and factors**

<b>Data / Parameter:</b>	<b>GWP_N2O</b>
Data unit:	tCO <sub>2</sub> e per tN <sub>2</sub> O
Description:	Global Warming Potential of N <sub>2</sub> O
Source of data used:	Kyoto Protocol (Decision 2/CP.3) and IPCC
Value (s):	310
Data used for:	Baseline and Project Emissions
Additional Comment:	Not applicable

<b>Data / Parameter:</b>	<b>KE_N2O</b>
Data unit:	t N <sub>2</sub> O per tonne of adipic acid produced
Description:	N <sub>2</sub> O Emission factor
Source of data used:	IPCC Good Practice Guidance
Value (s):	0.27
Data used for:	Baseline Emissions
Additional Comment:	Cap value for N <sub>2</sub> O_/AdOH emission factor

<b>Data / Parameter:</b>	<b>ΔH</b>
Data unit:	kcal/t of steam
Description:	Enthalpy of vaporization of water
Source of data used:	Steam table for boiler feed water temperature 100°C and 6kg/cm <sup>2</sup> steam production
Value (s):	557,960
Data used for:	Baseline Emissions
Additional Comment:	Use to calculate E_Steam

<b>Data / Parameter:</b>	<b>η</b>
Data unit:	%
Description:	Operational efficiency of the boiler for steam production
Source of data used:	Monitoring Plan Section 6.3
Value (s):	97
Data used for:	Baseline Emissions
Additional Comment:	Use to calculate E_Steam





D.2 Data and parameters monitored					
Data / Parameter:	P_AdOH				
Data unit:	tonnes				
Description:	Amount of adipic acid production				
Measured /Calculated /Default:	Measured value. Several instruments are used				
Source of data:	Log sheets, silo level				
Value(s) of monitored parameter:		From	To	P_AdOH Produced	P_AdOH Eligible *
	Period Value:	01/09/2010	26/09/2010	12,171.525	12,171.525
	Monthly values:	01/09/2010	26/09/2010	12,171.525	12,171.525
	P_AdOH Current year:		12,172		
	P_AdOH Annual Cap:		142,551		
	* Adipic acid production for baseline emission calculation, after cap application				
Data used for:	Baseline and Project Emissions				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	Equipment	Type	Accuracy class	Calibration frequency	Calibration Information
	Small bags and bags balance (W42811) Serial Number: 96C208	Load cell weighing indicator	+/- 0.03 kg	Annually	Last calibration
					28/04/2010
					Valid Until
					27/04/2011
	Big bags and bags balance (W43741) Serial Number: 2003105	Load cell weighing indicator	+/- 0.3 kg	Annually	Last calibration
					28/04/2010
					Valid Until
					27/04/2011
	Big bags and bags balance (W43742) Serial Number: 044134	Load cell weighing indicator	+/- 0.3 kg	Annually	Last calibration
					28/04/2010
					Valid Until
					27/04/2011
	SILO R42500 (W42505) Serial Number: 9009132	Load cell weighing indicator	+/- 1.1%	Annually	Last calibration
29/03/2010					
Valid Until					
28/03/2011					
Measuring/ Reading/ Recording frequency:	Daily/Monthly				



Calculation method (if applicable):	<p>The daily Adipic Acid production is measured directly by the weight of packed finished product and the silo weight difference between two consecutive days. The EB45 guidance Annex 13 in reference does not apply to such cases. The Executive Board has confirmed on EB36 the application of a yearly Adipic acid production cap as required by the methodologies (issue 1 of the Request for review for the Monitoring Period #9 08/08/2007 ~ 31/08/2007).</p> <p>The cumulated production of Adipic acid over the current year (starting last September 1st and ending with the last day of this period) is 12,172 t. This production is below the cap clarified in the EB48.</p> <p>Following EB48 clarification, the cap is 142,551 t/y calculated as 415 t/d x 365 x 94.109 % (information available in the Excel Workbook “ER ONSAN”, sheet BE, submitted to UNFCCC). The Executive Board has confirmed on EB36 the application of a yearly Adipic acid production cap as required by the methodology. This approach is consistent with the definitions and requirements of the "Guidance on accounting eligible HFC-23" AM0001 (EB39 Annex 8): the year of the crediting period is defined on the basis of the starting date of the crediting period of a project activity (September 1st); the current period ends on August 31st, which is the end date of the year of the crediting period.</p>
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30

Data / Parameter:	Nitric acid consumption (HNO3_consumption)				
Data unit:	tonnes				
Description:	Nitric acid consumption for the calculation of HNO3 chemical				
Measured /Calculated /Default:	Measured Several instruments are used				
Source of data	Excel Workbook based on the raw material consumption, DCS data and lab data				
Value(s) of monitored parameter:			HNO3_consumption		
	Rolling Year	26/09/2010	137,416		
	From	To			
	01/09/2010	26/09/2010	10,541		
Data used for:	Baseline and Project Emissions				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	Equipment	Type	Accuracy class	Calibration frequency	Calibration Information
	Fresh nitric acid HANWHA (FT6C069) Serial Number: 6C069602000	Mass flow meter	+/- 0.65%	Annually	Last calibration
					07/10/2009
					Valid Until
					06/10/2010



	Fresh nitric acid HANWHA (FT760CD) Serial Number: 760CDF02000	Mass flow meter	+/- 0.65%	Annually	Last calibration
					26/10/2009
					Valid Until
					25/10/2010
	Fresh nitric acid tank (LT92005) Serial Number: 90A-15477	Flash type level transmitter	+/- 2.2%	Annually	Last calibration
					16/04/2010
					Valid Until
					15/04/2011
	Fresh nitric acid tank (LT92015) Serial Number: 12B900230-232	Flash type level transmitter	+/- 2.2%	Annually	Last calibration
					16/04/2010
					Valid Until
					15/04/2011
Truck scale (W90000) Serial Number: '03-07	Load cell weighing indicator	+/- 10 kg	Annually	Last calibration	
				11/09/2010	
				Valid Until	
				10/09/2011	
Measuring/ Reading/ Recording frequency:	Daily/Monthly				
Calculation method (if applicable):	The Nitric acid consumption quantity is calculated based on sum of daily fresh HNO3 incoming quantity from Hanwha and Hu-chems, and holding volume and concentration variation of the fresh HNO3 storage tank (R92000 & R92010) and process storage tank (Mother acid tank, concentration acid tank and Oxidation acid tank)				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

Data / Parameter:	Physical losses in the adipic acid production process (HNO3_physical)			
Data unit:	tonnes			
Description:	Physical losses in the adipic acid production process data required for calculation of HNO3 chemical and the N2O emission factor N2O_/AdOH			
Measured /Calculated /Default:	Measured Several instruments are used			
Source of data	Excel Workbook based on the raw material consumption, DCS data and lab data			
Value(s) of monitored parameter:			HNO3_physical	
	Rolling Year	26/09/2010	2,716	
	From	To		
	01/09/2010	26/09/2010	213	
Data used for:	Baseline and Project Emissions			



Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	Equipment	Type	Accuracy class	Calibration frequency	Calibration Information
	Potentiometric Titrator	Potentio mettic	0.10%	Weekly	Last calibration
					20/09/2010
					Valid Until
					Following week
	HPLC	Chromato graphy	< 0.3% RSD	Daily	Last calibration
					26/09/2010
					Valid Until
					Following day
	NOx gas DCN inlet (AYA51526) Serial Number: W0625001	NDIR (Non Dispersive Infrared)	+/- 3.3%	4/year	Last calibration
					09/09/2010
					Valid Until
					08/12/2010
	LNOX E56010 to A56020 (AYA-56026) Serial Number: W0624984	NDIR (Non Dispersive Infrared)	+/- 5.3%	4/year	Last calibration
					09/09/2010
					Valid Until
					08/12/2010
	KAOP to Oxidation (FT12701)	Mass flow meter	+/- 1%	Annually	Last calibration
					30/03/2010
					Valid Until
					29/03/2011
	LNOX D51500 to E55030 (FQ51525) Serial Number: 91EC29665	Orifice type flow transmitter	+/- 5.3%	Annually	Last calibration
					11/12/2009
					Valid Until
					10/12/2010
	LNOX D52400 to E56030 (FQ52428) Serial Number: 12B605179-224	Orifice type flow transmitter	+/- 5.3%	Annually	Last calibration
					11/12/2009
					Valid Until
					10/12/2010
	HPCE R61380 to K83160 (FQ61782) Serial Number: 26BA02004-243	Magnetic Flow Meter	+/- 1.1%	Annually	Last calibration
					10/03/2010
					Valid Until
					09/03/2011
	DBA to F81200 (FQ81115) Serial Number: 870152709	Magnetic Flow Meter	+/- 1.50%	Annually	Last calibration
					12/03/2010
					Valid Until
					11/03/2011



	DBA R81100 to K83300 (FQ82351) Serial Number: EF97-70060	Magnetic Flow Meter	+/- 1.1%	Annually	Last calibration
					12/03/2010
					Valid Until
					11/03/2011
	Waste water to R83200 (FQ83401) Serial Number: 26B401923-217	Magnetic Flow Meter	+/- 1.1%	Annually	Last calibration
					10/03/2010
					Valid Until
					09/03/2011
Measuring/ Reading/ Recording frequency:	Daily/Monthly				
Calculation method (if applicable):	Nitric acid physical losses (HNO3_physical) in the aqueous wastes, the off gases, the adipic acid and the by-product are monitored. Those physical losses are subtracted from the nitric acid consumption (HNO3_consumption) to get the chemical consumption.				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>HNO<sub>3</sub>_chemical</b>				
Data unit :	tonnes				
Description :	Chemical consumption of Nitric acid required for the calculation of the N <sub>2</sub> O emission factor N <sub>2</sub> O_/AdOH				
Measured /Calculated /Default :	Measured Several instruments are used				
Source of data	Excel Workbook based on the raw material consumption, DCS data and lab data				
Value(s) of monitored parameter:			HNO <sub>3</sub> _consumption	HNO <sub>3</sub> _physical	HNO <sub>3</sub> _chemical
	Rolling Year	26/09/2010	137,416	2,716	134,700
	From	To			
	01/09/2010	26/09/2010	10,541	213	10,328
Data used for :	Baseline and Project Emissions				
Monitoring equipment	Not Applicable				
Measuring/ Reading/ Recording frequency :	Not Applicable				
Calculation method (if applicable) :	To obtain the chemical consumption (HNO <sub>3</sub> _chemical), the physical losses are deducted from the nitric acid consumption. HNO <sub>3</sub> _chemical = HNO <sub>3</sub> _consumption – HNO <sub>3</sub> _physical				
QA/QC procedures applied :	Data Handling Protocol – RP-Q1-706-30				



Data / Parameter :	N2O_/AdOH				
Data unit :	t N2O/t adipic acid				
Description :	Actual N2O emission factor for adipic acid production				
Measured /Calculated /Default :	Calculated				
Source of data :	Not applicable				
Value(s) of monitored parameter:		From	To	N2O_/AdOH Calculated	N2O_/AdOH Applied
	Period Value :	01/09/2010	26/09/2010	0.281	0.270
	Monthly values :	01/09/2010	26/09/2010	0.281	0.270
	P_AdOH Rolling Year (t)		160,556		
	HNO3_Chemical Rolling Year (t)		134,700		
	N2O_/AdOH capped at		0.270		
Data used for :	Baseline and Project Emissions				
Monitoring equipment	Not applicable				
Measuring/ Reading/ Recording frequency :	Not Applicable/Monthly				
Calculation method (if applicable) :	The N2O emission factor is calculated monthly using the rolling year data (AM0021/version 1 equation (4)): $N2O\_ /AdOH = HNO3\_chemical / P\_AdOH / 63 /2 \times 0.96 \times 44$ The calculated value for this period is above 0.270 and is then capped by the value of KE_N2O, as specified in the PDD table D.2.1.3 and required by the methodology AM0021/version 1 referring to the IPCC Good Practice Guidance.				
QA/QC procedures applied :	Data Handling Protocol – RP-Q1-706-30				

Data / Parameter :	Q_N2O				
Data unit :	kg				
Description :	Quantity of N2O produced				
Measured /Calculated /Default :	Calculated value				
Source of data :	Calculated from P_AdOH and N2O_/AdOH data				
Value(s) of monitored parameter:		From	To	Q_N2O	
	Period Value :	01/09/2010	26/09/2010	3,286,311	
	Monthly values :	01/09/2010	26/09/2010	3,286,311	
Data used for :	Baseline Emissions				



Monitoring equipment	Not applicable/Monthly
Measuring/ Reading/ Recording frequency :	Not applicable/Monthly
Calculation method (if applicable) :	$Q_{N_2O} = P_{AdOH} \times N_{2O\_}/AdOH$ Only the adipic acid production after cap application is used to define the baseline emission
QA/QC procedures applied :	Data Handling Protocol – RP-Q1-706-30

<b>Data / Parameter :</b>	<b>Q_N2O reg</b>
Data unit :	kg
Description :	Allowed N2O emissions
Measured /Calculated /Default :	Default value
Source of data :	South Korean legislation
Value(s) of monitored parameter:	Not applicable
Data used for :	Baseline Emissions
Monitoring equipment	Not applicable
Measuring/ Reading/ Recording frequency :	At date of the regulatory value introduction or change of the regulation
Calculation method (if applicable) :	Not applicable
QA/QC procedures applied :	<p>Rhodia follows the evolution of Korean legislation about N2O emissions that could affect the project Emission Reduction through the parameters N2O_reg / AdOH, Q_N2O reg, or ry as part of its RCMS (Rhodia Care Management System), RCMS+ is covering ISO14000 standard which requires to follow any update on Environmental regulations. For the monitoring of the new HSE (Hygiene, Safety and Environment) local and national regulations, Rhodia Korea has joined two committees: “Onsan Environment Management Society” and “Korea Environmental Engineers Federation”.</p> <p>The Framework Act on Low Carbon and Green Growth has become effective on 14/04/2010. Within the scope of this Governmental law the list of controlled companies is expected to be announced by September 2010. Then such designated “controlled” companies will have to submit a 3 years historical data on GHG emissions and energy consumption, and will have to submit reduction plans in September 2011.</p> <p>Until detailed implementation rules and calendar are known there is no applicable limitation from this new regulation on the N2O emissions of the Onsan Adipic plant.</p>



<b>Data / Parameter :</b>	<b>N2O reg/AdOH</b>
Data unit :	kg/kg
Description :	Allowed N2O emission / kg of adipic acid produced
Measured /Calculated /Default :	Default value
Source of data :	South Korean legislation
Value(s) of monitored parameter:	Not applicable
Data used for :	Baseline Emissions
Monitoring equipment	Not applicable
Measuring/ Reading/ Recording frequency :	At date of the regulatory value introduction or change of the regulation
Calculation method (if applicable) :	Not applicable
QA/QC procedures applied :	<p>Rhodia follows the evolution of Korean legislation about N2O emissions that could affect the project Emission Reduction through the parameters N2O_reg / AdOH, Q_N2O reg, or ry as part of its RCMS (Rhodia Care Management System), RCMS+ is covering ISO14000 standard which requires to follow any update on Environmental regulations. For the monitoring of the new HSE (Hygiene, Safety and Environment) local and national regulations, Rhodia Korea has joined two committees: “Onsan Environment Management Society” and “Korea Environmental Engineers Federation”.</p> <p>The Framework Act on Low Carbon and Green Growth has become effective on 14/04/2010. Within the scope of this Governmental law, the list of controlled companies will be announced by September 29<sup>th</sup> 2010. Then such designated “controlled” companies will have to submit a 3 years historical data on GHG emissions and energy consumption, and will have to submit reduction plans in September 2011.</p> <p>Until detailed implementation rules and calendar are known there is no applicable limitation from this new regulation on the N2O emissions of the Onsan Adipic plant.</p>

<b>Data / Parameter :</b>	<b>r<sub>y</sub></b>
Data unit :	%
Description :	Share of N2O emissions required to be destroyed
Measured /Calculated /Default :	Default value
Source of data :	South Korean legislation
Value(s) of monitored parameter:	Not applicable
Data used for :	Baseline Emissions





Monitoring equipment	Not applicable
Measuring/ Reading/ Recording frequency :	At date of the regulatory value introduction or change of the regulation
Calculation method (if applicable) :	Not applicable
QA/QC procedures applied :	<p>Rhodia follows the evolution of Korean legislation about N<sub>2</sub>O emissions that could affect the project Emission Reduction through the parameters N<sub>2</sub>O<sub>reg</sub> / AdOH, Q<sub>N<sub>2</sub>O</sub> reg, or ry as part of its RCMS (Rhodia Care Management System), RCMS+ is covering ISO14000 standard which requires to follow any update on Environmental regulations. For the monitoring of the new HSE (Hygiene, Safety and Environment) local and national regulations, Rhodia Korea has joined two committees: “Onsan Environment Management Society” and “Korea Environmental Engineers Federation”.</p> <p>The Framework Act on Low Carbon and Green Growth has become effective on 14/04/2010. Within the scope of this Governmental law the list of controlled companies is expected to be announced by September 2010. Then such designated “controlled” companies will have to submit a 3 years historical data on GHG emissions and energy consumption, and will have to submit reduction plans in September 2011.</p> <p>Until detailed implementation rules and calendar are known there is no applicable limitation from this new regulation on the N<sub>2</sub>O emissions of the Onsan Adipic plant.</p>

<b>Data / Parameter :</b>	<b>P N<sub>2</sub>O</b>
Data unit :	€/t
Description :	Market price of N <sub>2</sub> O
Measured /Calculated /Default :	Estimated
Source of data :	Market Survey (last update September 2010)
Value(s) of monitored parameter:	Zero (0) (there is no N <sub>2</sub> O market for the N <sub>2</sub> O produced as by-product of adipic acid in Onsan plant)
Data used for :	Baseline Emissions
Monitoring equipment	Not applicable
Measuring/ Reading/ Recording frequency :	Daily/Yearly
Calculation method (if applicable) :	Not applicable
QA/QC procedures applied :	Not applicable



Data / Parameter:	Q_Steam_p				
Data unit:	kg				
Description:	Amount of steam produced by the decomposition process				
Measured /Calculated /Default:	Measured				
Source of data:	The data are automatically and continuously acquired by DCS and stored in the PIMS.				
Value(s) of monitored parameter:		From	To	Q_Steam_p	
	Period Value:	01/09/2010	26/09/2010	17,205,985	
	Monthly values:	01/09/2010	26/09/2010	17,205,985	
Data used for:	Baseline Emissions				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	Equipment	Type	Accuracy class	Calibration frequency	Calibration Information
	Steam production by N2O system (FIQ58213) Serial Number: 294795/003/01	Vortex flow meter	+/- 0.8%	Annually	Last calibration
					31/03/2010
					Valid Until
					30/03/2011
	Boiler feed water flow rate (FIQ58204) Serial Number: 294795/002/01	Vortex flowmeter (Back up for FIQ58213)	+/- 0.28%	Annually	Last calibration
					30/03/2010
					Valid Until
					29/03/2011
	Boiler continuous purge flow rate (FIQ58303) Serial Number: 91F359891 613	Orifice type flowmeter (Back up for FIQ58213)	+/- 0.63%	Annually	Last calibration
					30/03/2010
					Valid Until
					29/03/2011
Measuring/ Reading/ Recording frequency:	Continuous/Monthly				
Calculation method (if applicable):	Not applicable				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>E_Steam</b>
Data unit:	kg CO2/kg of steam
Description:	CO2 emission factor of steam produced by facility
Measured /Calculated /Default:	Calculated
Source of data:	Data provided by the natural gas supplier (KYUNG DONG City Gas Ltd.)



Value(s) of monitored parameter:	0.122				
Data used for:	Baseline Emissions				
Monitoring equipment	Not applicable				
Measuring/ Reading/ Recording frequency:	Not Applicable/each monitoring period				
Calculation method (if applicable):	The rolling year value of E_Steam is calculated with the data available for the year prior to the end of the period in order to assure to have the data. The emission factor is obtained by the formula below: E_Steam = (QNG_tsteam/1,000) * E_NG <sub>y</sub> QNG_tsteam = ΔH (kcal/t) / (HHV (kcal/Nm3) x η (%)) Where: QNG_steam: amount of natural gas required to generate steam (Nm3/t) The HHV data is the yearly average value for the gas supplied by KYUNG DONG City Gas Ltd.				
	The yield η (%) of the boiler is conservatively taken as 97%, while the yield is generally below 90% E_NG <sub>y</sub> : yearly average value for the gas supplied by KYUNG DONG City Gas Ltd. (kg CO2/Nm3)				
	Year ending on: 31/08/2010				
	HHV Kcal/Nm3	ΔH kcal/t	η %	QNG_tsteam Nm3/t of steam	E_NG <sub>y</sub> kg-CO2/Nm3
	10,412	557,960	97	55.25	2.209
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>CO2_Steam_p</b>				
Data unit:	t CO <sub>2</sub> e				
Description:	CO <sub>2</sub> Emissions from Steam Production				
Measured /Calculated /Default:	Calculated				
Source of data:	Calculated from Q_Steam_p and E_Steam data				
Value(s) of monitored parameter:		From	To	CO <sub>2</sub> _Steam_p	
	Period Value:	01/09/2010	26/09/2010	2,099	
	Monthly values:	01/09/2010	26/09/2010	2,099	
Data used for:	Baseline Emissions				
Monitoring equipment	Not applicable				



Measuring/ Reading/ Recording frequency:	Not Applicable/Monthly
Calculation method (if applicable):	$CO2\_Steam\_p = Q\_Steam\_p \times E\_Steam$
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30

<b>Data / Parameter:</b>	<b>Q_GE</b>				
Data unit:	Nm3				
Description:	Volume of effluent gas leaving the stack				
Measured /Calculated /Default:	Measured				
Source of data:	Data are automatically acquired continuously by the DCS. Summed up to obtain the daily value in the DCS and stored in the PIMS data base.				
Value (s) of monitored parameter:		From	To	Q_GE	
	Period Value:	01/09/2010	26/09/2010	12,714,824	
	Monthly values:	01/09/2010	26/09/2010	12,714,824	
Data used for:	Project Emissions				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	<b>Equipment</b>	<b>Type</b>	<b>Accuracy class</b>	<b>Calibration frequency</b>	<b>Calibration Information</b>
	Effluent gas (FIQ58407) Serial Number: 104F-20070430	Pitot tube differential pressure flow meter	+/- 2.6%	Annually	Last calibration
					22/03/2010
					Valid Until
					21/03/2011
Measuring/ Reading/ Recording frequency:	Continuous/Monthly				
Calculation method (if applicable):	Not applicable				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>N2O_GE</b>
Data unit:	vppm
Description:	Concentration of N2O in the effluent gas
Measured /Calculated /Default:	Measured
Source of data:	on line N2O analyzer



		From	To	N2O_GE	
Value (s) of monitored parameter:	Period Value:	01/09/2010	26/09/2010	7.0	
	Monthly values:	01/09/2010	26/09/2010	7.0	
Data used for:	Project Emissions				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	Equipment	Type	Accuracy class	Calibration frequency	Calibration Information
					Last calibration
	Stack N2O analyzer (AIT58408) Serial Number: 17005	Gas analyzer, type in-situ and laser diode on wet basis	+/- 1 vppm	2/year	15/09/2010
					Valid Until
	Stack N2O analyzer (AI58418) Serial Number: W01894257	NDIR (Non Dispersive Infrared)	+/- 1 vppm	weekly	14/03/2011
					Last calibration
					24/09/2010
					Valid Until
				Following week	
Measuring/ Reading/ Recording frequency:	Daily/Monthly				
Calculation method (if applicable):	The daily average concentration on wet basis is calculated in the DCS as the flow averaged value of concentration values measured every 10 sec: $N2O\_GE = \frac{\int (Q\_GE \times N2O\_GE) \ dt}{Q\_GE}$				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>ND_N2O</b>				
Data unit:	kg				
Description:	Quantity of N2O in the effluent gas leaving the stack				
Measured /Calculated /Default:	Calculated				
Source of data:	The data are calculated automatically in the DCS taking into account the values of Q_GE and N2O_GE				
Value (s) of monitored parameter:		From	To	ND_N2O	
	Period Value:	01/09/2010	26/09/2010	176	
	Monthly values:	01/09/2010	26/09/2010	176	
Data used for:	Project Emissions				
Monitoring equipment	Not applicable				
Measuring/ Reading/ Recording frequency:	Continuous/Monthly				



Calculation method (if applicable):	<p>The daily value of non destroyed N<sub>2</sub>O (N<sub>2</sub>O_ND) is calculated on-line in the DCS using 10 second data of the concentration of N<sub>2</sub>O and the flow rate of the gaseous effluent, both measured on a wet basis (Equivalent to method D of EB47 “Tool to determine the mass flow of a greenhouse gas in a gaseous stream”):</p> $ND\_N2O = Q\_GE * N2O\_GE * Specific\_gravity\_of\_N2O$ <p>The specific_gravity_of_N<sub>2</sub>O = 44/22.414 x 10<sup>-6</sup> is used to transform vppm in kg/ Nm<sup>3</sup></p> <p>When the instant value indicated by AIT58408 is lower than 5 vppm (detection limit), the value of 5 vppm is used in the equation above.</p>
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30

Data / Parameter:	Q_NG				
Data unit:	Nm3				
Description:	Amount of natural gas used by the decomposition process				
Measured /Calculated /Default:	Monitored				
Source of data:	Q_NG value obtained from the natural gas flowmeter				
Value (s) of monitored parameter:		From	To	Q_NG	
	Period Value:	01/09/2010	26/09/2010	959,050	
	Monthly values:	01/09/2010	26/09/2010	959,050	
Data used for:	Project Emissions				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	Equipment	Type	Accuracy class	Calibration frequency	Calibration Information
	Natural Gas burning (FQ91485A) Serial Number: 80067664/2005	Turbine flow meter	+/- 0.31%	Annually	Last calibration
					17/03/2010
					Valid Until
					16/03/2011
	Natural Gas burning (FQ91485B) (Back up flow meter) Serial Number: 80067662/2005	Turbine flow meter	+/- 2%	Annually	Last calibration
					14/07/2010
					Valid Until
13/07/2011					
Measuring/ Reading/ Recording frequency:	Continuous/Daily				
Calculation method (if applicable):	Not applicable				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				



<b>Data / Parameter:</b>	<b>E_NGy</b>
Data unit:	kg CO <sub>2</sub> /Nm <sup>3</sup>
Description:	Emissions coefficient for natural gas combustion
Measured /Calculated /Default:	Calculated
Source of data:	Data provided by natural gas supplier (KYUNG DONG City Gas Ltd.)
Value (s) of monitored parameter:	2.209
Data used for:	Project Emissions
Monitoring equipment	Not applicable
Measuring/ Reading/ Recording frequency:	Monthly
Calculation method (if applicable):	The emissions coefficient is calculated according to the PDD Monitoring Plan. For the 12 months preceding the monitoring period, the CO <sub>2</sub> quantity emitted by the combustion of the natural gas from all the gas boilers is summed up and divided by the total quantity of natural gas consumed in Nm <sup>3</sup> over the same 12 months period. The CO <sub>2</sub> quantity emitted is obtained by multiplying the emission factor of the month (based on the gas composition of the month) by the quantity of natural gas burned in the same month, using the formulae described in section E1 of the PDD.
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30

<b>Data / Parameter:</b>	<b>NGC</b>			
Data unit:	kg CO <sub>2</sub>			
Description:	Natural gas composition required for the calculation of E_NG			
Measured /Calculated /Default:	Measured			
Source of data:	Data provided by natural gas supplier (KYUNG DONG City Gas Ltd.)			
Value (s) of monitored parameter:	<b>Component</b>	<b>Number of C</b>	<b>Sep-10</b>	
	CH <sub>4</sub> (Methane)	1	90.51	
	C <sub>2</sub> H <sub>6</sub> (Ethane)	2	5.74	
	C <sub>3</sub> H <sub>8</sub> (Propane)	3	2.55	
	I-C <sub>4</sub> H <sub>10</sub> (I-Butane)	4	0.51	
	N-C <sub>4</sub> H <sub>10</sub> (N-Butane)	4	0.51	
	I-C <sub>5</sub> H <sub>12</sub> (I-Pentane)	5	0.02	
	N-C <sub>5</sub> H <sub>12</sub> (N-Pentane)	5	0.00	
	N <sub>2</sub> (Nitrogen)	0	0.16	



	CO2 (Carbon dioxide)	1	0.00	
	T O T A L		100.00	
	Average number of C		1.138	
	E_NGm (kg-CO2/Nm3)		2.237	
Data used for:	Project Emissions			
Monitoring	<p>NGC is use to calculate the E_NG monthly value. The average number of C in a mole of NG is calculated from the composition = S (number of C in each mole) x (volume ratio). The CO2 specific gravity in standard state is 1.965.</p> <p>For this monitoring period, natural gas composition from September 2010 are not yet available, so to be conservative, the NGC of the month of November 2006 was used for September as it gives the highest E_NG value since the beginning of the crediting period (01/09/2006).</p>			
Measuring/ Reading/ Recording frequency:	Monthly/Monthly			
Calculation method (if applicable):	E_NG = 1.965 x (average number of C) 1.965 is the specific gravity of CO2 in standard conditions			
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30			

Data / Parameter:	CO2_NG				
Data unit:	t CO2				
Description:	CO2 Emissions for Natural Gas				
Measured /Calculated /Default:	Calculated				
Source of data:	see Q_NG and E_NG				
Value (s) of monitored parameter:		From	To	CO2_NG	
	Period Value:	01/09/2010	26/09/2010	2,146	
	Monthly values:	01/09/2010	26/09/2010	2,146	
Data used for:	Project Emissions				
Monitoring equipment	Not applicable				
Measuring/ Reading/ Recording frequency:	Not Applicable/Monthly				
Calculation method (if applicable):	CO2_NG is calculated monthly using the monthly values of Q_NG and E_NG CO2_NG <sub>m</sub> = Q_NG <sub>m</sub> x E_NG <sub>m</sub>				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				





<b>Data / Parameter:</b>	<b>%_on-line</b>				
Data unit:	% of production time				
Description:	% of production time that the N2O is sent to the decomposition facility.				
Measured /Calculated /Default:	Calculated				
Source of data:	DCS				
Value (s) of monitored parameter:		From	To	%_on-line	
	Period Value:	01/09/2010	26/09/2010	100.00%	
	Monthly values:	01/09/2010	26/09/2010	100.00%	
Data used for:	Project Emissions				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	<b>Equipment</b>	<b>Type</b>	<b>Accuracy class</b>	<b>Calibration frequency</b>	<b>Calibration Information</b>
	By-pass valves position detectors (HV57001 and HV57003) Serial Numbers: 603100335 and 603100337	Butterfly type On-off valve	Not applicable	Annually	Last calibration
					31/03/2010
					Valid Until
					30/03/2011
Measuring/ Reading/ Recording frequency:	Continuous/Daily and Monthly				
Calculation method (if applicable):	<p>The %_on-line is calculated on a daily basis according to the PDD and is the ratio between the time of production of adipic acid while the unit is connected to the N2O destruction facility and the time of production.</p> <p>At the end of the month/period (y), %_on-line is calculated as:</p> $\%_{\text{on-line}_y} = 1 - (Q_{\text{N}_2\text{O}_{\text{by-pass}_y} / (P_{\text{AdOH}_y} \times \text{N}_2\text{O}_{\text{AdOH}}))$				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>Q_N2O_by-pass</b>				
Data unit:	kg				
Description:	N2O by passing the decomposition facility				
Measured /Calculated /Default:	Calculated				
Source of data:	Daily data from P_AdOH and %_on-line				
Value (s) of monitored parameter:		From	To	Q_N2O_by-pass	
	Period Value:	01/09/2010	26/09/2010	0	
	Monthly values:	01/09/2010	26/09/2010	0	
Data used for:	Project Emissions				



Monitoring equipment	Not applicable
Measuring/ Reading/ Recording frequency:	Not applicable/Daily and Monthly
Calculation method (if applicable):	<p>The quantity of N<sub>2</sub>O that by-pass the facility is calculated daily (d) following AM0021/version1.</p> $Q_{N_2O\_by-pass_d} = P_{AdOH_d} \times N_{2O\_AdOH} \times (1 - \%_{on-line_d})$ <p>At the end of the period the quantity of N<sub>2</sub>O that by-passed the facility is summed for all days:</p> $Q_{N_2O\_by-pass_y} = \sum (Q_{N_2O\_by-pass_d})$
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30

	<b>Q_Power</b>				
Data unit:	kWh				
Description:	Electric consumption of the decomposition facility				
Measured /Calculated /Default:	Measured				
Source of data:	The quantity of electricity consumed by the N <sub>2</sub> O destruction unit is continuously measured by the electricity meter LV22WH				
Value (s) of monitored parameter:		From	To	Q_Power	
	Period Value:	01/09/2010	26/09/2010	126,058	
	Monthly values:	01/09/2010	26/09/2010	126,058	
Data used for:	Leakage				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	<b>Equipment</b>	<b>Type</b>	<b>Accuracy class</b>	<b>Calibration frequency</b>	<b>Calibration Information</b>
	Electricity meter (LV22WH) Serial Number: 54023	Incremental Electricity meter	+/- 15 kWh	7 years	Last calibration
					21/10/2008
					Valid Until
					20/10/2015
Measuring/ Reading/ Recording frequency:	Continuous/Daily and Monthly				
Calculation method (if applicable):	The daily amounts are automatically calculated online on the DCS.				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>E_Power</b>
Data unit:	kg CO <sub>2</sub> /kWh
Description:	CO <sub>2</sub> intensity for electric generation



Measured /Calculated /Default:	Calculated
Source of data:	KEPCO data made publicly available by the Korean Energy Economics Institute (KEEI) for 2009
Value (s) of monitored parameter:	0.728
Data used for:	Leakage
Monitoring equipment	Not applicable
Measuring/ Reading/ Recording frequency:	Yearly
Calculation method (if applicable):	<p>Calculated using the combined margin (CM) approach according to ACM0002 version 2 in the file (Grid_EF_SouthKorea 2009 rev4.xls). AM00021 version 1 requires calculation of <math>\bar{E}_{Power}</math> as “the highest of the operating margin and the build margin according to ACM0002 version 2 for the grid connected to the facility”. The way the emission factor is calculated follows exactly the requirement of the methodology for the following reasons:</p> <p>(i) “according to ACM0002” means among other things to follow the combined margin CM approach (CM is the weighted average of OM and BM, with default weights of 50%/50%),</p> <p>(ii) “the highest of the operating margin” means the simple OM as it is the highest operating margin of all alternatives listed in ACM0002 for calculation of the OM since the simple OM excludes all low-operating costs and must-run power plants which are nuclear power plants, hydro power plants and all renewable energy power plants, and</p> <p>(iii) “the build margin” means the build margin (option 2 updated annually ex post) as required to be calculated following ACM0002 version 2.</p>
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30

<b>Data / Parameter:</b>	<b>CO2_Power</b>				
Data unit:	t CO2e				
Description:	CO2 Emissions from Electricity consumption				
Measured /Calculated /Default:	Calculated				
Source of data:	Not applicable				
Value(s) of monitored parameter:		From	To	CO2_Power	
	Period Value:	01/09/2010	26/09/2010	92	
	Monthly values:	01/09/2010	26/09/2010	92	
Data used for:	Leakage				
Monitoring equipment	Not applicable				



Measuring/ Reading/ Recording frequency:	Not applicable/Monthly
Calculation method (if applicable):	$CO_2\_Power = Q\_Power \times E\_Power$
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30

<b>Data / Parameter:</b>	<b>Q_Steam_c</b>				
Data unit:	kg				
Description:	Amount of steam consumed by the decomposition facility				
Measured /Calculated /Default:	Measured				
Source of data:	Data are automatically acquired continuously by DCS. Summed up to obtain the daily value in the DCS and stored it in the PIMS data base.				
Value (s) of monitored parameter:		From	To	Q_Steam_c	
	Period Value:	01/09/2010	26/09/2010	85,918	
	Monthly values:	01/09/2010	26/09/2010	85,918	
Data used for:	Leakage				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	<b>Equipment</b>	<b>Type</b>	<b>Accuracy class</b>	<b>Calibration frequency</b>	<b>Calibration Information</b>
	Steam import to N2O system (FIQ58082) Serial Number: 95F206714 609	Vortex flow meter	+/- 1.0%	Annually	Last calibration
					30/03/2010
					Valid Until
					29/03/2011
Measuring/ Reading/ Recording frequency:	Continuous/Daily and Monthly				
Calculation method (if applicable):	Not applicable				
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30				

<b>Data / Parameter:</b>	<b>E_Steam_c</b>
Data unit:	kg CO2/kg of steam
Description:	CO2 intensity for steam consumed in the facility
Measured /Calculated /Default:	Calculated
Source of data:	Composition from Kyung Dong City Gas Ltd, the natural gas supplier
Value (s) of monitored parameter:	0.139



Data used for:	Leakage			
Monitoring equipment	Not applicable			
Measuring/ Reading/ Recording frequency:	Not applicable/Period			
Calculation method (if applicable):	<p>The steam consumed in the facility is supplied by existing boilers on site. Steam production and natural gas consumption are continuously monitored. From the monthly natural gas consumption and the monthly value of E<sub>NG</sub>, monthly emissions of CO<sub>2</sub> for steam production are calculated and cumulated over the year.</p> <p>Q<sub>NG_tsteam</sub> in Nm<sup>3</sup>/t of steam is obtained from the ratio of annual natural gas consumption over the annual steam production.</p> <p>The E<sub>Steam_c</sub> is obtained from:</p> $E_{Steam\_c} = E_{NG_y} \times Q_{NG\_tsteam}$			
	Year ending	Q <sub>NG_tsteam</sub> Nm <sup>3</sup> /t of steam	E <sub>NG</sub> kg CO <sub>2</sub> /Nm <sup>3</sup>	E <sub>Steam_c</sub> kg CO <sub>2</sub> /kg steam
	01/09/2010	62.776	2.209	0.139
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30			

<b>Data / Parameter:</b>	<b>CO<sub>2</sub>_Steam_c</b>			
Data unit:	t CO <sub>2</sub> e			
Description:	CO <sub>2</sub> Emissions from Steam consumption			
Measured /Calculated /Default:	Calculated			
Source of data:	Not applicable			
Value(s) of monitored parameter:		From	To	CO <sub>2</sub> _Steam_c
	Period Value:	01/09/2010	26/09/2010	12
	Monthly values:	01/09/2010	26/09/2010	12
Data used for:	Leakage			
Monitoring equipment	Not applicable			
Measuring/ Reading/ Recording frequency:	Not applicable/Monthly			
Calculation method (if applicable):	CO <sub>2</sub> _Steam_c = Q <sub>Steam_c</sub> x E <sub>Steam_c</sub>			
QA/QC procedures applied:	Data Handling Protocol - RP-Q1-706-30			



Data / Parameter:	NOx				
Data unit:	vppm				
Description:	NO + NO2 concentration in the stack gas required by Korean legislation.				
Measured /Calculated /Default:	Measured				
Source of data:	On-line analyser				
Value (s) of monitored parameter:	Parameter	Unit	Limit	Analytical results in this period	
	NOx	vppm	200 max at least 95% of time	Average of 93 and less than 200 for 100% of time	
Data used for:	Compliance with local regulation on NOx				
Monitoring equipment (type, accuracy class, serial number, calibration frequency, date of last calibration, validity)	Equipment	Type	Accuracy class	Calibration frequency	Calibration Information
	Stack NOx analyzer (AT58401) Serial Number: U2-176	NDIR (Non Dispersive Infrared)	+/- 1.0%	Weekly	Last calibration
					24/09/2010
					Valid Until
				01/10/2010	
Measuring/ Reading/ Recording frequency:	Continuous/Daily and monthly According to local government environmental low, NOx value is transmitted to local government agency as a part of the TeleMonitoring System (TMS) from 01/07/2007.				
Calculation method (if applicable):	Not applicable				
QA/QC procedures applied:	To make sure of the on-line analysis value, KumHo Environmental Co, Ltd had carried out the analysis of the gas discharged from the N2O stack during this monitoring period. The analysis values were under the control specification limit of the Korea environmental regulation (KumHo Company has an analysis license for air emission which is permitted by the Korean environmental government) Data Handling Protocol - RP-Q1-706-30				

**SECTION E. Emission reductions calculation****E.1. Baseline emissions calculation**

The amount of baseline emissions in the given period  $y$  is calculated using the following formula according to AM0021/version 1 equation (1):

$$BE_y = Q_{N_2O_y} \times GWP_{N_2O} + Q_{Steam_{p_y}} \times E_{Steam_y}$$

It has been checked that there are no South Korean regulation in place that would limit the quantity of  $N_2O$  emitted that can be taken into account for the calculation of the baseline emissions (see D.2.1.4. in the PDD).

The quantity  $Q_{N_2O_y}$  of  $N_2O$  emitted over the period can then be calculated by:

$$Q_{N_2O_y} = P_{AdOH_y} \times N_2O_{reg} / AdOH$$

Over the period of reference the emission factor of the adipic acid plant was above the capped value of 0.27 kg  $N_2O$ /kg AdOH. So the capped value is being used according to AM 0021/version 1. The baseline emissions in this monitoring period are calculated in the table below using the values detailed in section D.2 above:

Parameter	Value	Unit
$Q_{N_2O_y}$	3,286,311	kg
$P_{AdOH_y}$ (eligible)	12171.525	t
$N_2O_{reg} / AdOH$	0.270	kg $N_2O$ /kg AdOH
$Q_{N_2O_{reg}}$	No limit	
$N_2O_{reg} / AdOH$	No limit	
$r_y$	NA	
$GWP_{N_2O}$ (1)	310	kgCO <sub>2</sub> e/kg $N_2O$
$Q_{Steam_{p_y}}$	17,205,985	kg of Steam
$E_{Steam_y}$	0.122	kg CO <sub>2</sub> /kg of Steam
<b><math>BE_y</math></b>	<b>1,020,855</b>	<b>tCO<sub>2</sub>e</b>

(1) Kyoto Protocol Rule, Decision 2/CP.3 and IPCC

By manual calculation of  $BE_y$  the result may differ slightly from the more accurate value of the workbook shown above due to rounding down effects applied to remain conservative.

**E.2. Project emissions calculation**

According to AM0021, version 1, the project emissions  $PE_y$  are the emissions in the period  $y$  due to:

- the  $N_2O$  that has not been sent to the decomposition process (i.e. the  $N_2O$  that by-passed the decomposition facility)
- the  $N_2O$  non-destroyed by the decomposition process
- the emissions due to the use of natural gas.

PE<sub>y</sub> is calculated as follows:

$$PE_y = (Q_{N_2O\_by-pass_y} + ND_{N_2O_y}) \times GWP_{N_2O} + Q_{NG_y} \times E_{NG_y} \text{ (AM0021/version 1 equation (5))}$$

With  $CO_2\_NG = Q_{NG} \times E_{NG}$  (PDD section E.1) we get:

$$PE_y = (Q_{N_2O\_by-pass_y} + ND_{N_2O_y}) \times GWP_{N_2O} + CO_2\_NG_y$$

The project emissions in this monitoring period are calculated in the table below using the values presented in detail in section D:

Parameter	Value	Unit
P_AdOH <sub>y</sub>	12,171.525	t
N <sub>2</sub> O_/AdOH	0.270	kg N <sub>2</sub> O/kg AdOH
%_on-line <sub>y</sub>	100.00	%
Q_N <sub>2</sub> O_by-pass <sub>y</sub>	0	kg
Q_GE <sub>y</sub>	12,714,824	Nm <sup>3</sup>
N <sub>2</sub> O_GE <sub>y</sub>	7.0	vppm
Specific gravity of_N <sub>2</sub> O	1.963 x 10 <sup>-6</sup>	Unit
ND_N <sub>2</sub> O <sub>y</sub>	176	kg N <sub>2</sub> O
GWP_N <sub>2</sub> O (1)	310	kgCO <sub>2</sub> e/kg N <sub>2</sub> O
CO <sub>2</sub> _NG <sub>y</sub>	2,146	tCO <sub>2</sub> e
<b>PE<sub>y</sub></b>	<b>2,201</b>	tCO <sub>2</sub> e

(1) Kyoto Protocol Rule, Decision 2/CP.3 and IPCC

Q\_N<sub>2</sub>O\_by-pass and ND\_N<sub>2</sub>O in kg need to be divided by 1,000 to get PE in t CO<sub>2</sub>e

By manual calculation of PE<sub>y</sub> the result may differ slightly from the more accurate value of the workbook shown above due to rounding up effects to remain conservative.

### E.3. Leakage calculation

Leakage emissions in a given period y comprise the emissions associated with the energy sources used to generate any steam and electricity used by the decomposition plant.

Leakage is calculated according to AM0021/version 1, equation (7):

$$L_y = Q_{Power_y} \times E_{Power} + Q_{steam\_c_y} \times E_{steam\_c_y}$$

The leakage emissions in this monitoring period are calculated in the table below using the values presented in the detail in section D:





Parameter	Value	Unit
Q_Power <sub>y</sub>	126,058	kWh
E_Power	0.728	kg CO2/kWh
Q_Steam_c <sub>y</sub>	85,918	kg
E_Steam_c <sub>y</sub>	0.139	kg CO2/kg of steam
L <sub>y</sub>	<b>104</b>	tCO2e

By manual calculation of L<sub>y</sub> the result may differ slightly from the more accurate value of the workbook shown above due to rounding up effects to remain conservative.

#### E.4. Emission reductions calculation / table

Following the methodology AM0021/version 1 and the PDD section D.2.4, the total emission reductions achieved by this project activity during this monitoring period is:

$$ER_y = BE_y - PE_y - L_y$$

Thus:

$$ER_y = (1,020,855 - 2,201 - 104) \text{ tCO}_2\text{e}$$

$$ER_y = 1,018,550 \text{ tCO}_2\text{e}$$

#### E.5. Comparison of actual emission reductions with estimates in the CDM-PDD

In the PDD section E the emission reduction is estimated to be 9,147,301 tCO<sub>2</sub>e. So the PDD-estimated emission reduction relative to the monitoring period of 26 days is 651,586 tCO<sub>2</sub>e. The 366,964 tCO<sub>2</sub>e variance of the actual emission reduction is further explained in section E.6.

Item	Values applied in ex-ante calculation of the registered CDM-PDD	Actual values reached during the monitoring period
BE <sub>y</sub> (tCO <sub>2</sub> e)	776,350	1,020,855
PE <sub>y</sub> (tCO <sub>2</sub> e)	124,597	2,201
L <sub>y</sub> (tCO <sub>2</sub> e)	167	104
<b>Emission reductions (tCO<sub>2</sub>e)</b>	<b>651,586</b>	<b>1,018,550</b>

**E.6. Remarks on difference from estimated value**

For the sake of clarity, the amount of Emission Reductions can exceed the amount calculated in a year period in the PDD as all data in the PDD were conservative, in particular the performance of the N<sub>2</sub>O abatement unit (in fact, the actual efficiency has been > 85%, and the destruction rate > 99%).

<b>BE:</b>	
<b>PDD value (tCO<sub>2</sub>e):</b> 776,350	<b>Period (tCO<sub>2</sub>e):</b> 1,020,855
Variance	Explanation
243,672	The adipic acid production used for the ex-ante emission reduction was conservatively taken as 130,000 t/y which is lower than the nameplate capacity of 151,475 t/y (415 t/d x 365) mentioned in the PDD. When a capacity investment is made, there are design margins (10 to 20%) taken by engineering. Continuous improvement of daily operations and more efficient use of the installed capacity allowed to produce 468.1 t/d on average during this period to meet the market demand.
833	Slight impact of the steam production
<b>244,505</b>	<b>Total BE variance</b>

It is important to note that according to the methodology AM0021/version 1, the eligible adipic acid production that can be used in the baseline is yearly capped, so it limits on a yearly basis the emission reduction calculation claimed for CERs. Please refer to item E.1 for details.

<b>PE:</b>	
<b>PDD value (tCO<sub>2</sub>e):</b> 124,597	<b>Period (tCO<sub>2</sub>e):</b> 2,201
Variance	Explanation
116,263	The significant higher performance of the N <sub>2</sub> O abatement unit (the actual %_online of 100.00% in this period is significantly higher than the value of 85% estimated in the PDD due to excellent operational performance). The estimate of 85% in the PDD assumed a low performance rate of the destruction equipment due to the lack of experience with such equipment.
6,570	A higher destruction rate of the N <sub>2</sub> O which is in excess of 99.99 % during this period versus 99 % taken conservatively in the PDD.
-437	Difference in the natural gas consumption estimate and actual in the period
<b>122,396</b>	<b>Total BE variance</b>

<b>L</b>	
<b>PDD value (tCO<sub>2</sub>e):</b> 167	<b>Period (tCO<sub>2</sub>e):</b> 104
Variance	Explanation
63	Difference mainly due to the quantity of steam consumed
<b>63</b>	<b>Total L variance</b>



The actual emission reductions determined in this monitoring period are higher than the *pro rata* estimation based on the *ex-ante* calculation made in the PDD, as explained above. This is to be expected because, given the general experiences with constant overestimation of CER volumes in the first years of CDM project development, Rhodia wanted to set the CER estimates in the PDD in a conservative fashion, especially regarding performance of the abatement equipment

- - - -