



**Monitoring report form for CDM project activity
(Version 07.0)**

Complete this form in accordance with the instructions attached at the end of this form.

MONITORING REPORT

Title of the project activity	Recovery and Utilization of Associated Gas at Pondok Tengah LPG Plant – PT. Yudistira Energy	
UNFCCC reference number of the project activity	6008	
Version number of the PDD applicable to this monitoring report	9.1	
Version number of this monitoring report	01	
Completion date of this monitoring report	11/01/2020	
Monitoring period number	08	
Duration of this monitoring period	01/07/2019 to 31/12/2019 (first and last days included)	
Monitoring report number for this monitoring period	Not applicable as not batch project/monitoring report	
Project participants	1. PT Yudistira Energy (Indonesia) 2. Agrinergy Pte Ltd. (United Kingdom of Great Britain and Northern Ireland, Switzerland) 3. Agasco Limited (Australia) 4. ACT Financial Solutions B.V. (Netherlands)	
Host Party	Indonesia	
Applied methodologies and standardized baselines	AM0009 ver. 6 - Recovery and utilization of gas from oil wells that would otherwise be flared or vented	
Sectoral scopes	1 : Energy industries (renewable - / non-renewable sources) 10 : Fugitive emissions from fuels (solid, oil and gas)	
Amount of GHG emission reductions or net anthropogenic GHG removals achieved by the project activity in this monitoring period	Amount achieved before 1 January 2013	Amount achieved from 1 January 2013
	0	19,641
Amount of GHG emission reductions or net anthropogenic GHG removals estimated ex ante for this monitoring period in the PDD	90,708 ¹	

¹ Estimated CER as per PDD = 181,416 tCO₂e for 12 months
 No of monitoring months in this monitoring period = 06 month
 Therefore, estimated CER = 90,708 tCO₂e for 06 month

SECTION A. Description of project activity**A.1. General description of project activity**

>>

1. The purpose of the proposed project activity is utilization of associated gas.
2. The project activity involves the installation of a new pipeline to recover and transport the associated gas and the construction of a LPG Plant to utilize it.
3. The project activity encompasses the establishment and operation of a new LPG Plant to recover and utilise the associated gas which had been flared at Tambun and Pondok Tengah Gas Collection stations owned by Pertamina EP Station - Pertagas (Pertamina EP and Pertagas are subsidiaries of PT Pertamina, the State Owned Oil & Gas Company), and also installation of new pipeline to connect Pondok Tengah- Pertamina EP Station with Yudistira's LPG Plant. The recovered gas is processed into LPG, Condensate and Lean Gas.
4. Total emission reductions achieved in this monitoring period is 19,641 tCO₂e.

A.2. Location of project activity

>>

1. Host Party (ies): Indonesia
2. Region/ State/ Province, etc.: West Jawa
3. City/ Town/ Community, etc.: Babelan Sub district, Huripjaya village, Bekasi District
4. Physical/ Geographical location: GPS coordinates 6.085806 S and 107.042564 E

A.3. Parties and project participants

Parties involved	Project participants	Indicate if the Party involved wishes to be considered as project participant (Yes/No)
Indonesia (host)	PT Yudistira Energy	No
United Kingdom of Great Britain and Northern Ireland	Agrinergy Pte Ltd.	No
Australia	Agasco Limited	No
Netherlands	ACT Financial Solutions B.V.	No

A.4. Reference to applied methodologies and standardized baselines

>>

Title and version: Approved baseline methodology AM0009 – “Recovery and utilization of gas from oil wells that would otherwise be flared or vented” - Version 06.0.0

- Tool to calculate project or leakage CO₂ emissions from fossil fuel combustion version 02;
- Tool for the demonstration and assessment of additionality version 06.0.0;
- Tool to calculate baseline, project and/or leakage emissions from electricity consumption version 01

Reference: <http://cdm.unfccc.int/methodologies/DB/ET4NXMVXFQ5C2EJ5L1OF8YZIEVLVDA>

A.5. Crediting period type and duration

>>

Crediting Period: 01/01/2013 – 31/12/2019 (Renewable)

Length of crediting period: 07 years 00 months

Start date: 01/01/2013


Current monitoring period: 01/07/2019 to 31/12/2019 - first & last days included

SECTION B. Implementation of project activity

B.1. Description of implemented project activity

>>

1. The purpose of the proposed project activity is utilization of associated gas. The project activity involves the installation of a new pipeline to recover and transport the associated gas and the construction of a LPG Plant to utilize it.
2. The pipeline and LPG Plant is designed to process 17 MMSCFD of gas into LPG, condensate and lean gas. The LPG Plant Pondok Tengah applies a refrigeration and condensation process for LPG and condensate recovery.
3. The final products of LPG, condensate and lean gas are produced through drying wet associated gas and then putting it through a distillation process to separate the dried gas hydrocarbon components. The project activity uses processing and basic engineering design from Mackenzie Hydrocarbons Australia, a design specialist established since 1990 which holds licences for the petroleum, petrochemical and power industries.
4. The project activity was commissioned on 03/03/2011, and the commercial operation started on 01/03/2011 (Initial Gas-in incl. for trial etc).

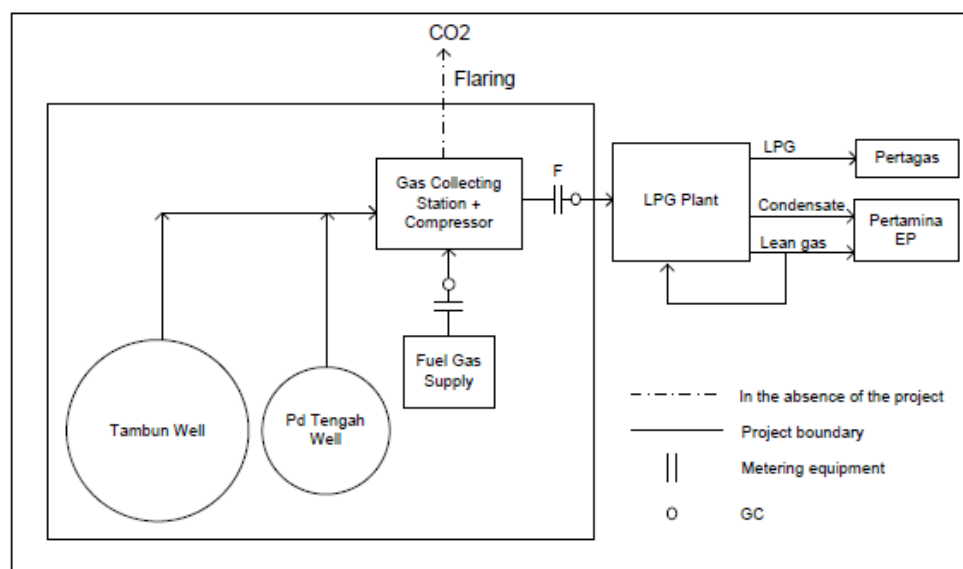

B.2. Post-registration changes

B.2.1. Temporary deviations from the registered monitoring plan, applied methodologies or standardized baselines

>>

There are no deviations from the registered monitoring plan or applied methodology.

B.2.2. Corrections

>>

There are no corrections.

B.2.3. Changes to the start date of the crediting period

>>

There is no change to the start date of crediting period.

B.2.4. Inclusion of monitoring plan

>>

No

B.2.5. Permanent changes to the registered monitoring plan, or permanent deviation of monitoring from the applied methodologies, standardized baselines, or other applied standards or tools

>>

There are no any permanent changes from registered monitoring plan or applied methodology.

B.2.6. Changes to project design

>>

There are no changes to project design of registered project activity.

B.2.7. Changes specific to afforestation or reforestation project activity

>>

Not Applicable

SECTION C. Description of monitoring system

>>

The project activity is implemented as mentioned in the registered PDD. No new technology measure or retrofits have been added during this verification period.

The information regarding the actual operation of the project activity during this monitoring period, including downtimes of equipment is given below,

From 01/07/2019 - 31/12/2019	
Total Number of Hours	4416
Downtime Hours	3192
Operating Hours	1224

Monitoring procedures

All the data and parameters that need to be monitored are outlined in a monitoring plan to ensure that the emission reductions are properly monitored and transparently recorded. Data collection is prepared by the Operator, checked by the Supervisor and approved by the Plant Manager. The project Operator collects the data, and the collected data checked by the Production Supervisor and approved by the Plant Manager. Data collection in the form of paper is archived electronically. Regular data back-up is conducted to guarantee the completeness of the electronic data.

Calibration of equipments

Standard method of instruments calibration is conducted in accordance to National Standard and ISO 9001:2000 article 7.6: Control Monitoring and Measuring Equipment. Calibration is done by accredited laboratory or Directorate of Metrology under Ministry of Trade. Calibration period is set based on equipment usage duration, calendar schedule or combination of both. In special cases, calibration will take place when measuring equipments show deviation from its fair value. Calibration schedule for metering system, including Feed Gas Flow meter Package and Fuel Gas Flow meter Package is completed once per year.

Staff and Operator Training

The purpose of staff and operator training is to make sure all the personnel involved understand and know how to carry out the proper procedures for monitoring. The training for Operators is conducted by PT Yudistira Haka Perkasa as appointed operator for the project activity.

Emergency procedures


The plant maintains the data in both hard and soft copy formats. Agrinergy also receives the data from the plant and if any discrepancies are observed, questions are raised and corrections made accordingly. However, no emergencies occurred during the period under verification which could have given rise to emissions.

QA/QC procedure

The monitoring meters are calibrated according to national standards each year. The calibration certificates are made available at the time of verification.

All data will be kept for a minimum of 2 years following issuance of certified emission reductions or the end of the crediting period, whichever is later, and the storage of this data will be the responsibility of the project developers.


Organizational structure

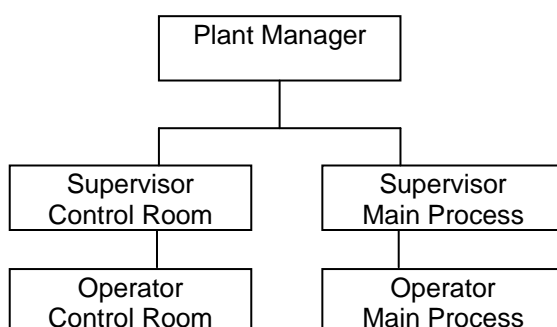

Roles and responsibilities

Designation	Responsibility
Operator	Data collection
Supervisor	Data checking collected by plant operator
Plant Manager	Approve the final data collected by operator and checked by supervisor

The single line diagram showing all relevant monitoring points is given below,

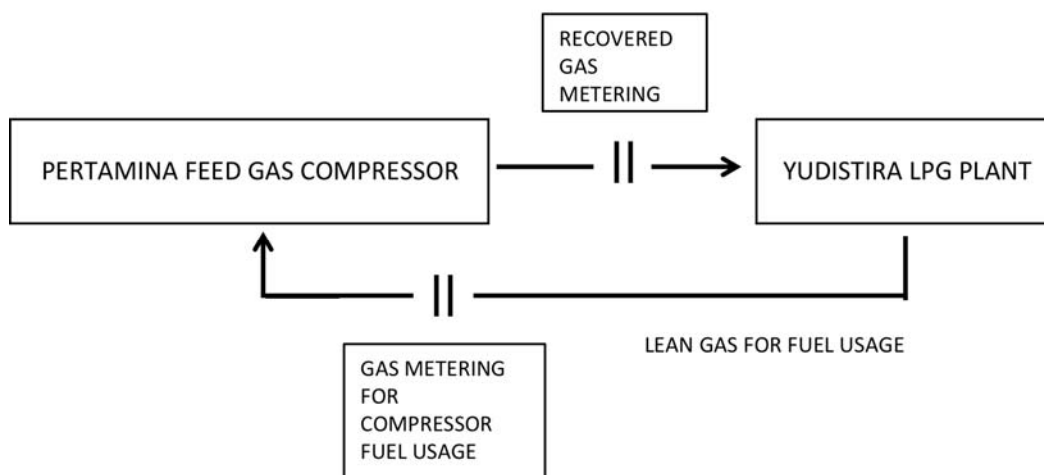

SECTION D. Data and parameters**D.1. Data and parameters fixed ex ante**

(Copy this table for each data or parameter.)

Data/Parameter	EF _{CO₂,Methane}		
Unit	tCO ₂ /TJ		
Description	CO ₂ emission factor for methane		
Source of data	Calculated in line with procedures and data presented in ISO 6976:		
	Unit	Value	Source
	Carbon Content of Methane	12,011 kg/kmol	ISO 6976: Table 1
	CO ₂ Emission Factor for Methane	44.01 kg/kmol	ISO 6976: Table 1
	NCV of Methane (at 250C)	802.60 kJ/mol	ISO 6976: Table 3
Value(s) applied	54.834		
Choice of data or measurement methods and procedures	As per AM0009 version 06.0.0, the CO ₂ emission factor for methane is included in the parameters that are not monitored.		
Purpose of data/parameter	Project emissions calculations		
Additional comments			

D.2. Data and parameters monitored

(Copy this table for each data or parameter.)

Data/parameter:	$V_{F,y}$				
Unit	Nm ³				
Description	Volume of total recovered gas measured at point F in Figure B1 in year y				
Measured/calculated/default	Measured				
Source of data	On site measurement at point F as described in Figure B1 using Flow Meter				
Value(s) of monitored parameter	9650697.17				
Monitoring equipment:	Calibrating frequency: Annual, Calibrating agency: Direktorat Jenderal Perlindungan Konsumen Dan Terib Niaga , Direktorat Metrologi				
	Equipment	Make	Serial no	Calibration date	Valid till
	Orifice fitting	Pietro Fiorentini	2D1 DDDDED465D	17/01/2019	17/01/2020
	Flow Computer	OMNI	1730101		
	Differential pressure transmitter	Yokogawa	91K652743-026		
	Static Pressure Transmitter	Yokogawa	91K652758-026		
	Temperature transmitter	Yokogawa	C2K71 0093-028		
	Three pens recorder	ITT Barton	11785689003		
Measuring/reading/recording frequency:	Continuous measurement and monthly recorded				
Calculation method (if applicable):	-				

QA/QC procedures:	The monitoring meters are calibrated according to national standards each year. In case of emergency when main metering cannot be used, Barton Chart as backup meter is used.
Purpose of data:	Baseline emissions calculations
Additional comments:	-

Data/parameter:	$NCV_{RG,F,y}$
Unit	TJ/Nm ³
Description	Net calorific value of recovered gas measured at point F in Figure B1 during the period y
Measured/calculated/default	Measured
Source of data	On site sampling of recovered gas from Tambun and Pondok Tengah at point F in Figure B1 for laboratory analysis (by accredited lab)
Value(s) of monitored parameter	0.00004065
Monitoring equipment	Third party laboratory analysis
Measuring/reading/recording frequency:	Monthly
Calculation method (if applicable):	-
QA/QC procedures:	<p>Sampling in accordance with ISO 10715 or equivalent standard. Compositional analysis in accordance with ISO 6974 or equivalent standard. Routine maintenance and calibration in accordance with ISO 10723 or equivalent standard. GC calibration gases certified to ISO 6141 or equivalent standard. Annual manufacturer servicing and calibration to ISO17025 or equivalent standard. In case third party laboratories are used, these should as a minimum have ISO17025 accreditation or justify that they can comply with similar quality standards</p> <p>Analysis of natural gas and similar gaseous mixtures by chromatograph as per GPA Standard 2261-00. Calculation of Gross Heating Value relative density and compressibility, factor of natural gas mixtures from compositional analysis as per GPA Standard 2172-00/ 2172/96.</p> <p>KAN (Komite Akreditasi Nasional) is ISO17025 accredited lab.</p>
Purpose of data:	Baseline emission calculations
Additional comments:	The qualifier net is synonymous with lower and inferior and the term calorific value is synonymous with heating value.

Data/parameter:	$FC_{i,j,y}$
Unit	m ³ /year
Description	Quantity of gas fuel combusted in process j during the year y
Measured/calculated/default	Measured
Source of data	On site measurement in MMSCF unit and then converted to m ³ .
Value(s) of monitored parameter	716199.38

Monitoring equipment	Calibrating frequency: Annual, Calibrating agency: Direktorat Jenderal Perlindungan Konsumen Dan Terib Niaga , Direktorat Metrologi				
	Equipment	Make	Serial no	Calibration date	Valid till
	Orifice fitting	TMCO	52741	21/03/2019	21/03/2020
	Flow Computer	Kingfisher plus	171557		
	Differential pressure transmitter	ABB	6410010900		
	Static Pressure Transmitter	ABB	6410010807		
	Three pens recorder	Cameron	111744557005		
Temperature transmitter	Azbil	R-90383-41-083			
Measuring/reading/recording frequency:	Continuously measured and monthly recorded				
Calculation method (if applicable):	-				
QA/QC procedures:	The monitoring meters are calibrated according to national standards each year. Accuracy of the meter is +/- 1%.				
Purpose of data:	Project emission calculation				
Additional comments:	The consistency of metered fuel consumption quantities are crosschecked by the running hour of compressor in the period of monitoring.				

Data/parameter:	$NCV_{i,y}$
Unit	GJ/m ³
Description	Aaverage net calorific value of gas fuel in year y for combustion of compressor
Measured/calculated/default	Default
Source of data	IPCC default values at the upper limit of the uncertainty of a 95% confidence interval as provided in Table 1.2 of Chapter 1 of Vol. 2 (Energy) of the 2006 IPCC Guidelines on National GHG Inventories.
Value(s) of monitored parameter	0.0504
Monitoring equipment	-
Measuring/reading/recording frequency:	Annually
Calculation method (if applicable):	-
QA/QC procedures:	-
Purpose of data:	Project emission calculations
Additional comments:	-

Data/parameter:	$EF_{CO_2,i,y}$
Unit	tCO ₂ /GJ

Description	Weighted average CO ₂ emission factor of lean gas fuel in year y for combustion
Measured/calculated/default	Default
Source of data	IPCC default values at the upper limit of the uncertainty at a 95% confidence interval as provided in table 1.4 of Chapter1 of Vol. 2 (Energy) of the 2006 IPCC Guidelines on National GHG Inventories
Value(s) of monitored parameter	0.0583
Monitoring equipment	-
Measuring/reading/recording frequency:	Annually
Calculation method (if applicable):	-
QA/QC procedures:	-
Purpose of data:	Project emission calculations
Additional comments:	Since there is no CO ₂ emission factor provided, IPCC Guidelines value should be used.

D.3. Implementation of sampling plan

>>

Not Applicable

SECTION E. Calculation of emission reductions or net anthropogenic removals

E.1. Calculation of baseline emissions or baseline net removals

>>

The formulae used to calculate the baseline emission is:

$$BE_y = V_{F,y} \cdot NCV_{RG,F,y} \cdot EF_{CO_2Methane}$$

BE_y Baseline emissions during the period y, (tCO₂e)

$V_{F,y}$ Volume of total recovered gas measured at point F in Figure B.1, after pre-processing and before the part of the recovered gas may be used on-site, during the period y, (Nm³)

$NCV_{RG,F,y}$ Net calorific value of recovered gas measured at point F in Figure B.1 during the period y, (TJ/Nm³)

$EF_{CO_2Methane}$ CO₂ emission factor for methane (tCO₂/TJ)

Month	$V_{F,y}$ Nm ³	$NCV_{RG,F,y}$ TJ/Nm ³	$EF_{CO_2, Methane}$ tCO ₂ /TJ	Baseline emissions tCO ₂
Jul-19	0	0	54.834	0
Aug-19	0	0	54.834	0
Sep-19	0	0	54.834	0
Oct-19	0	0	54.834	0
Nov-19	3238989.72	0.00003930	54.834	6979.95
Dec-19	6411707.45	0.00004200	54.834	14766.34
Total	9650697.17	0.00004065	54.834	21746.29

$$BE_y = 21,746.29 \text{ tCO}_2\text{e}$$

E.2. Calculation of project emissions or actual net removals

>>

$$PE_y = PE_{FC,j,y}$$

Where:

PE_y Project emissions in the period y , (tCO₂e)

$PE_{FC,j,y}$ CO₂ emissions due to consumption of fossil fuels for the recovery, pre-treatment, transportation, and, if applicable, compression of the recovered gas during the period y , (tCO₂e)

$$PE_{FC,j,y} = \sum_i FC_{i,j,y} \times COEF_{i,y}$$

$PE_{FC,j,y}$ The CO₂ emissions from fossil fuel combustion in process j during the year y (tCO₂/yr)

$FC_{i,j,y}$ The quantity of fuel type i combusted in process j during the year y (mass or volume unit/yr);

$COEF_{i,y}$ The CO₂ emission coefficient of fuel type i in year y (tCO₂/mass or volume unit)

i The fuel types combusted in process j during the year y

$$COEF_{i,y} = NCV_{i,y} \times EF_{CO2,i,y}$$

Month	FC _{i,j,y}	NCV _{i,y}	EF _{CO2,i,y}	Project emissions
	m ³ /yr	GJ/m ³	tCO ₂ /GJ	tCO ₂
Jul-19	0	0.0504	0.0583	0
Aug-19	0	0.0504	0.0583	0
Sep-19	0	0.0504	0.0583	0
Oct-19	0	0.0504	0.0583	0
Nov-19	230869.44	0.0504	0.0583	678.37
Dec-19	485329.93	0.0504	0.0583	1426.05
Total	716199.38	0.0504	0.0583	2104.42

$$PE_y = 2104.42 \text{ tCO}_2\text{e}$$

E.3. Calculation of leakage emissions

>>

No leakage emissions are considered in line with the methodology.

E.4. Calculation of emission reductions or net anthropogenic removals

	Baseline GHG emissions or baseline net GHG removals (t CO ₂ e)	Project GHG emissions or actual net GHG removals (t CO ₂ e)	Leakage GHG emissions (t CO ₂ e)	GHG emission reductions or net anthropogenic GHG removals (t CO ₂ e)		
				Before 01/01/2013	From 01/01/2013	Total amount
Total	21746.29	2104.42	0	-	19641.86	19641 (round down to nearest integer)

E.5. Comparison of emission reductions or net anthropogenic removals achieved with estimates in the registered PDD

Amount achieved during this monitoring period (t CO ₂ e)	Amount estimated ex ante (t CO ₂ e)
19,641	90,708

E.5.1. Explanation of calculation of “amount estimated ex ante for this monitoring period in the PDD”

>>

Based on the registered PDD, the annual emission reductions estimated *ex ante* of the project is 181,416 tCO₂e. The duration of this monitoring period is 06 months, thus the total amount estimated *ex ante* for this monitoring period is (181,416 tCO₂e /12 months) x 6 month = 90,708 tCO₂e

E.6. Remarks on increase in achieved emission reductions

>>

There is decrease in emission reductions by 78.35% during the current monitoring period relative to those estimated in the registered CDM-PDD. The decrease in emission reductions during the monitoring period is a reflection of fluctuations in feed gas volumes and net calorific value of recovered gas. In addition, the plant was shut down for the period 01/07/2019 to 10/11/2019.

Parameter	Unit	PDD estimate (for 12 months)	PDD estimate (for 06 months)	Monitored value (for 06 months)	Source
V _{F,v}	Nm ³	84,100,771	42,050,386	9,650,697	Monitored
NCV _{RG,F,v}	TJ/Nm ³	0.000046	-	0.00004065	Monitored
FC _{i,i,v}	m ³ /year	10,622,896	5,311,448	716,199	Monitored
NCV _{i,v}	GJ/Nm ³	0.0454	-	0.0454	IPCC default
EF _{CO2,i,v}	tCO ₂ /GJ	0.0583	-	0.0583	IPCC default

E.7. Remarks on scale of small-scale project activity

>>

Not Applicable

Document information

<i>Version</i>	<i>Date</i>	<i>Description</i>
07.0	31 May 2019	Revision to: <ul style="list-style-type: none"> • Ensure consistency with version 02.0 of the “CDM project standard for project activities” (CDM-EB93-A04-STAN); • Add a section on remarks on the observance of the scale limit of small-scale project activity during the crediting period; • Add "changes specific to afforestation or reforestation project activity" as a possible post-registration changes; • Clarify the reporting of net anthropogenic GHG removals for A/R project activities between two commitment periods; • Make editorial improvements.
06.0	7 June 2017	Revision to: <ul style="list-style-type: none"> • Ensure consistency with version 01.0 of the “CDM project standard for project activities” (CDM-EB93-A04-STAN); • Make editorial improvements.
05.1	4 May 2015	Editorial revision to correct version numbering.
05.0	1 April 2015	Revisions to: <ul style="list-style-type: none"> • Include provisions related to delayed submission of a monitoring plan; • Provisions related to the Host Party; • Remove reference to programme of activities; • Overall editorial improvement.
04.0	25 June 2014	Revisions to: <ul style="list-style-type: none"> • Include the Attachment: Instructions for filling out the monitoring report form (these instructions supersede the "Guideline: Completing the monitoring report form" (Version 04.0)); • Include provisions related to standardized baselines; • Add contact information on a responsible person(s)/ entity(ies) for completing the CDM-MR-FORM in A.6 and Appendix 1; • Change the reference number from <i>F-CDM-MR</i> to <i>CDM-MR-FORM</i>; • Editorial improvement.
03.2	5 November 2013	Editorial revision to correct table in page 1.
03.1	2 January 2013	Editorial revision to correct table in section E.5.
03.0	3 December 2012	Revision required to introduce a provision on reporting actual emission reductions or net GHG removals by sinks for the period up to 31 December 2012 and the period from 1 January 2013 onwards (EB 70, Annex 11).
02.0	13 March 2012	Revision required to ensure consistency with the "Guidelines for completing the monitoring report form" (EB 66, Annex 20).
01.0	28 May 2010	EB 54, Annex 34. Initial adoption.

<i>Version</i>	<i>Date</i>	<i>Description</i>
Decision Class: Regulatory		
Document Type: Form		
Business Function: Issuance		
Keywords: monitoring report		