



**Monitoring report form for CDM project activity
(Version 06.0)**

Complete this form in accordance with the instructions attached at the end of this form.

MONITORING REPORT

Title of the project activity	SF6 recovery and reclamation project, South Korea	
UNFCCC reference number of the project activity	4274	
Version number of the PDD applicable to this monitoring report	PDD Version 8, 26/02/2013	
Version number of this monitoring report	04	
Completion date of this monitoring report	26/02/2018	
Monitoring period number	5	
Duration of this monitoring period	01/01/2017~31/12/2017	
Monitoring report number for this monitoring report	1	
Project participants	Solvay Fluor Korea Co. Ltd Solvay Energy Services SAS EcoSecurities International Limited (withdrawn)	
Host Party	Republic of Korea	
Sectoral scopes	11 : Fugitive emissions from production and consumption of halocarbons and sulphur hexafluoride	
Applied methodologies and standardized baselines	AM0079 version 2, "Recovery of SF6 from Gas insulated electrical equipment in testing facilities"	
Amount of GHG emission reductions or net anthropogenic GHG removals achieved by the project activity in this monitoring period	Amount achieved before 1 January 2013	Amount achieved from 1 January 2013
	0	133,322 tCO ₂ e
Amount of GHG emission reductions or net anthropogenic GHG removals estimated ex ante for this monitoring period in the PDD	165,092 tCO ₂ e	

SECTION A. Description of project activity

A.1. General description of project activity

>>

Purpose of the project activity:

The project activity aims to reduce SF₆ emissions from the Korea Electrotechnology Research Institute (KERI) testing facility of electrotechnical equipment in South Korea that would have been vented in a business-as-usual scenario. SF₆ that has been used in the testing of gas insulated electrical equipment (GIEE), especially gas circuit breakers (GCB) and gas insulated switchgears (GIS) at KERI, is recovered and then reclaimed at Solvay's SF₆ manufacturing facility located in Ulsan, South Korea.

General description of the project activity:

Under the project activity, used SF₆ is recovered using a compressor and a piping system and stored in pressurised dedicated recovery cylinders at KERI site. These cylinders are then transported to a SF₆ manufacturing facility, Solvay Fluor Korea (SFK). At the SFK plant, chemical analysis is used to evaluate the moisture, gaseous and solid decomposition of the recovered gas. After checking that used SF₆ gas fulfils specifications for reclamation, the used SF₆ gas is fed into the new SF₆ production stream through a system of injection piping at a rate of 3 to 10 kg gas/hour. The production line will remove impurities and reclaim the gas to the same purity as new SF₆ in order to be sold in the market.

A.2. Location of project activity

>>

Solvay Fluor Korea Co. Ltd: 383, Daejung-Ri, Onsan-Eup, Ulju-kun, Ulsan, Republic of Korea

Coordinates: Latitude 35.426374 Longitude 129.340193

Korea Electrotechnology Research Institute: 28-1 Seongju-dong, Changwon-si, Gyeongsangnamdo, Republic of Korea

Coordinates: Latitude 35.189363 Longitude 128.718224

A.3. Parties and project participants

Parties involved	Project participants	Indicate if the Party involved wishes to be considered as project participant (Yes/No)
Republic of Korea (host)	Solvay Fluor Korea Co. Ltd	No
France	Solvay Energy Services SAS (Private entity)	No
United Kingdom of Great Britain and Northern Ireland	EcoSecurities International Limited (withdrawn)	No

A.4. Reference to applied methodologies and standardized baselines

>>

AM0079 "Recovery of SF₆ from Gas insulated electrical equipment in testing facilities" (version 2)
 "Tool to calculate baseline, project and/or leakage emissions from electricity consumption" (version 01)

Standard for application of the global warming potentials to Clean Development Mechanism project activities and programmes of activities for the second commitment period of the Kyoto Protocol (version 01)

A.5. Crediting period type and duration

>>

Crediting period type: 10 years (Fixed)

Crediting period: 01/04/2011 ~ 31/03/2021

SECTION B. Implementation of project activity**B.1. Description of implemented project activity**

>>

The project was started on 23 November 2007 and the commissioning at the recovery site started on 29 April 2008.

The project consists of two sites, one is the SF₆ recovery site (KERI) and the other is the SF₆ reclamation site (SKF). The operational period for both sites is presented in the Table B.1.

Note that recovery-reclamation cylinder *i* refers to each recovery-reclamation cycle that a cylinder goes through (i.e. from the moment the cylinder is taken to the recovery site until the moment the gas contained in the cylinder has been injected into the reclamation facility) and not the physical cylinder. The project uses bundles of two interconnected gas cylinders as its unit of transport; therefore one cylinder *i* for the purposes of the methodology refers to a “bundle”, or two connected physical cylinders, also referred to as the “cylinder bundle”.

Table B.1 The operational period at KERI and SKF site for this monitoring period

<i>i</i>	SF ₆ Recovery at KERI site		SF ₆ Reclamation at SKF site	
	Recovery Period from	Recovery Period to	Reclamation Period from	Reclamation Period to
CDM-16007	26 Dec 2016	25 Jan 2017	03 Feb 2017	11 Feb 2017
CDM-17001	31 Jan 2017	03 Mar 2017	22 Mar 2017	03 Apr 2017
CDM-17002	07 Mar 2017	21 Mar 2017	05 Apr 2017	12 Apr 2017
CDM-17003	22 Mar 2017	14 Apr 2017	21 Apr 2017	30 Apr 2017
CDM-17004	17 Apr 2017	11 May 2017	23 May 2017	01 Jun 2017
CDM-17005	17 May 2017	01 Jun 2017	07 Jun 2017	15 Jun 2017
CDM-17006	02 Jun 2017	19 Jun 2017	21 Jun 2017	27 Jun 2017
CDM-17007	28 Jun 2017	28 Jul 2017	14 Aug 2017	19 Aug 2017
CDM-17008	01 Aug 2017	06 Sep 2017	21 Sep 2017	28 Sep 2017
CDM-17009	14 Sep 2017	19 Dec 2017	22 Dec 2017	26 Dec 2017

There was no event occurred during this monitoring period, which may have impact on the applicability of the methodology.

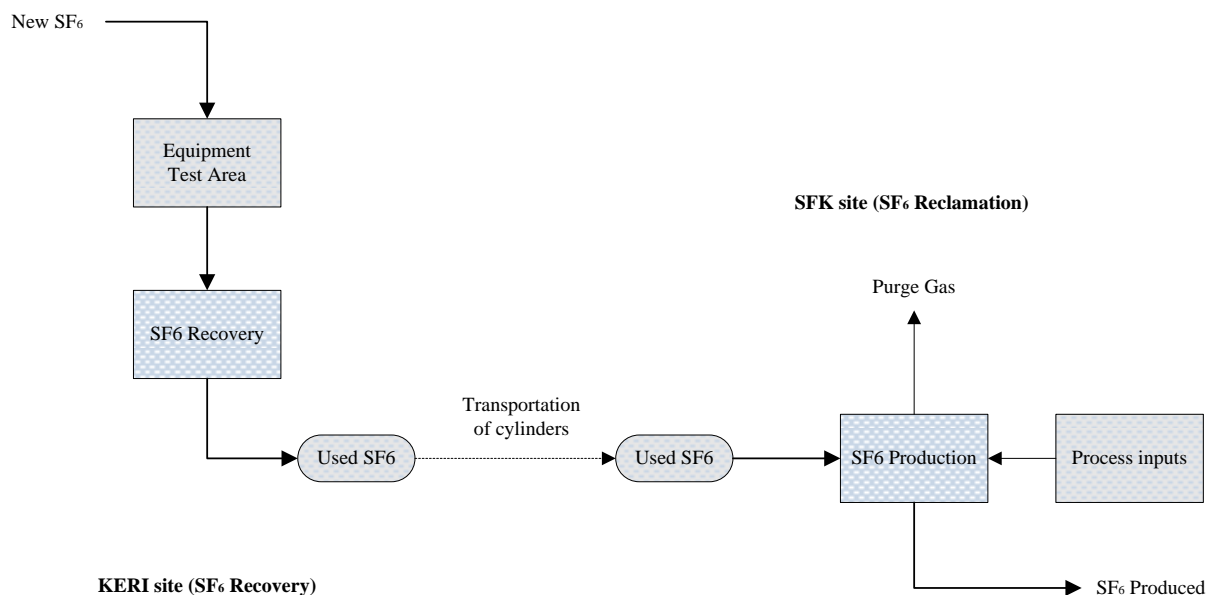


Fig B.1 Diagram of the recovery & reclamation process and the monitoring points

B.2. Post-registration changes

B.2.1. Temporary deviations from the registered monitoring plan, applied methodologies or standardized baselines

>>

Not applicable for this monitoring period

B.2.2. Corrections

>>

Not applicable for this monitoring period

B.2.3. Changes to the start date of the crediting period

>>

Not applicable for this monitoring period

B.2.4. Inclusion of monitoring plan

>>

Not applicable for this monitoring period

B.2.5. Permanent changes to the registered monitoring plan, or permanent deviation of monitoring from the applied methodologies, standardized baselines, or other applied standards or tools

>>

Not applicable for this monitoring period

B.2.6. Changes to project design

>>

Not applicable for this monitoring period

SECTION C. Description of monitoring system

>>

The monitoring methodology employed is in line with the approved methodology AM0079 (version 2).

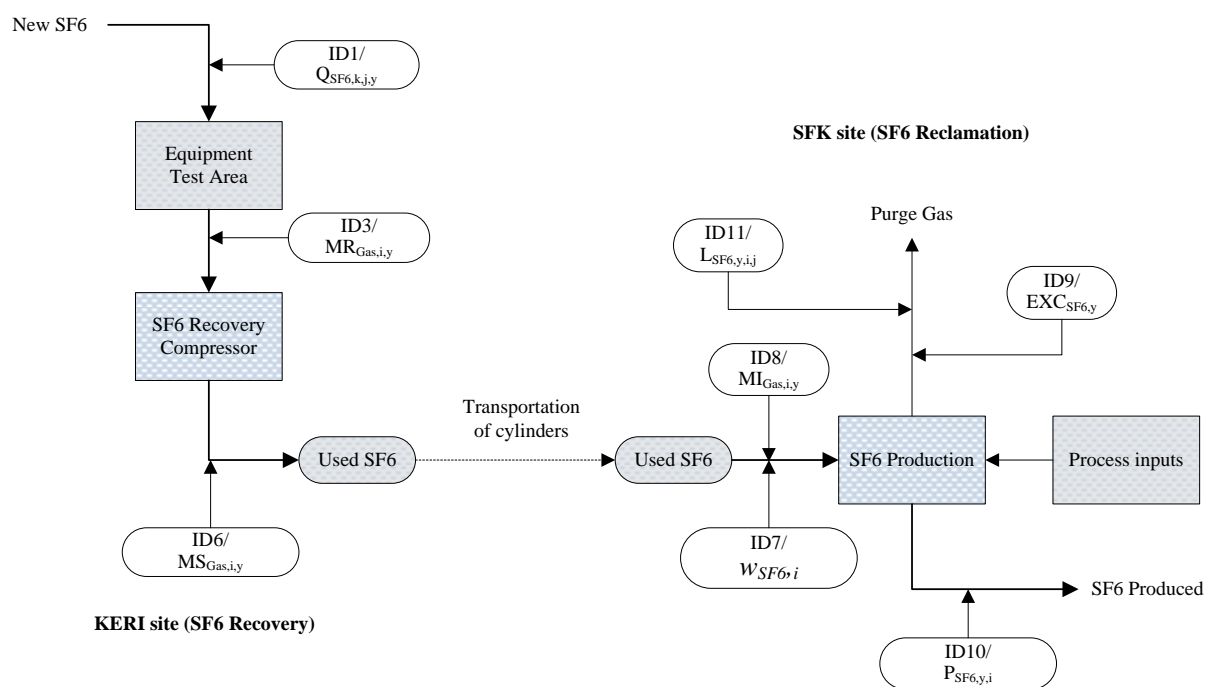


Fig C1. Diagram of the monitoring system

Project Monitoring Plan

Number	Code	Description	Purpose / Use	Location
1	$Q_{SF_6,k,j,y}$	Mass of SF ₆ that is filled into equipment j of category k in year y at the SF ₆ recovery site	Baseline Emissions	SF ₆ recovery site
2	$NT_{PJ,k,y}$	Average number of total testing items where recovery was done per equipment in the project, for category k	Baseline Emissions	SF ₆ recovery site
3	$MR_{Gas,i,y}$	Mass of used gas that is recovered into cylinder i at the SF ₆ recovery site in year y	Baseline Emissions	SF ₆ recovery site
4	i	Sub-index used for each cylinder that completed a recovery-reclamation cycle included in the estimation of emissions avoided for the year y	Baseline Emissions	SF ₆ recovery site, SF ₆ reclamation site
5	n	Number of cylinders that completed a recovery-reclamation cycle in the year y . Only these cylinders are eligible to be included in the estimation of emissions avoided for the year y	Baseline Emissions	SF ₆ recovery site, SF ₆ reclamation site
6	$MS_{Gas,i,y}$	Mass of used gas stored in recovery cylinder bundle i in year y	Baseline Emissions	SF ₆ recovery site
7	$W_{SF_6,i}$	Concentration of SF ₆ in the cylinder i	Baseline Emissions	SF ₆ reclamation site/Laboratory
8	$MI_{Gas,i,y}$	Mass of used gas from cylinder i which is injected for reclamation	Baseline Emissions	SF ₆ reclamation site
9	$EXC_{SF_6,y}$	Quantity of SF ₆ which was being injected to the reclamation facility during exceptional events occurred in year y	Project Emissions	SF ₆ reclamation site
10	$P_{SF_6,i,y}$	Production of SF ₆ during the reclamation period of cylinder i , in year y	Project Emissions	SF ₆ reclamation site
11	$L_{SF_6,y,i,j}$	Amount of SF ₆ loss from point j during the reclamation period of cylinder i in year y	Project Emissions	SF ₆ reclamation site

1. Monitoring organization

Each of the Project sites, the SF₆ recovery site (KERI) and the SF₆ reclamation site (SFK), designates an on-site CDM coordinator. The CDM coordinators have the overall responsibility for the relevant monitoring of emissions reductions of the project activity according to the monitoring plan. The CDM coordinators report regularly to their respective senior management. All other technical staff who are involved in the data collection process have defined roles and responsibilities. The overall monitoring responsibility for both the SFK and KERI sites is with the CDM coordinator of the SF₆ reclamation site (SFK). The standard operation procedures (SOP) were developed for the project and were in place at both recovery and reclamation sites. All the

personnel involved in the CDM activity were properly trained for both the normal project operation and CDM specific activities. CDM training records and SOP training records were both properly retained.

2. Monitoring equipment

The primary equipment used for the monitoring of CDM parameters project is the following:

- (i) Weighing scale: A weighing scale is used for weighing the cylinders in a bundle at the SF₆ recovery site. The scale has been appropriately calibrated.
- (ii) Mass flow meter: Flow meters are used to quantify the amount of SF₆ both at the SF₆ recovery and reclamation sites. The flow meters have been appropriately calibrated.
- (iii) Gas chromatograph: The SF₆ content of the used gas in each cylinder bundle is analysed using a gas chromatography. The equipment has been appropriately calibrated.

Two cylinders filled with used SF₆ as one cylinder bundle are transported to the reclamation site with each cylinder bundle clearly identified and marked. Upon arrival at the SF₆ reclamation site, each cylinder bundle would be analysed, to determine the proportion of SF₆ gas and the proportion of impurities.

3. Data and records management

Data monitored for CDM purposes would be recorded and filed electronically once the cylinder bundle is filled with SF₆. All relevant data were archived electronically, and backed up regularly. Moreover, it will be kept for the full crediting period, plus two years after the end of the crediting period or the last issuance of CERs for this project activity (whichever occurs later). The electronic files would be backed up. The CDM Coordinators are responsible for checking the data quality and are responsible for managing the collection, storage and archiving of all data and records.

4. Quality Assurance

All data collected is checked by the CDM coordinators. Standard Operation Procedures are in place to ensure consistent quality of all data collection, recording, storage, reporting and possible monitoring data adjustments and uncertainties as well as emergencies. Moreover, regular internal audits are conducted to assure that the project is in compliance with operational and CDM requirements.

SECTION D. Data and parameters

D.1. Data and parameters fixed ex ante

(Copy this table for each data or parameter.)

Data/Parameter	GWPSF ₆
Unit	tCO ₂ e/tSF ₆
Description	Global warming potential of SF ₆
Source of data	IPCC Fourth Assessment Report;
Value(s) applied	22,800 for the second commitment period of the Kyoto Protocol
Choice of data or measurement methods and procedures	The value is adopted from IPCC Fourth Assessment Report, in the column "global warming potentials provided for given time horizon" using the 100-year time horizon.
Purpose of data/parameter	Baseline emissions calculation
Additional comments	Shall be updated according to any future COP/MOP decisions

Data/Parameter	-
Unit	MW

Description	Rated capacity of the operating equipment used for project activity of the testing facilities at recovery site and reclamation site in year y
Source of data	Records at recovery and reclamation sites
Value(s) applied	At recovery site = 0.0169 MW corresponds to total capacity of following corresponding equipments, 1. Two Compressors – 10kW 2. Suctioning Pump – 0.6 kW 3. Vacuum Pump – 1.5kW 4. Evaporator – 4.8kW Total: 16.9kW = 0.0169MW At reclamation site = 0.000006 MW, corresponds to the following equipment, 1. One flow meter – 6 W
Choice of data or measurement methods and procedures	Records at recovery and reclamation sites
Purpose of data/parameter	Project emissions calculation
Additional comments	The specification of the above monitoring instruments will be checked

Data/Parameter	EF_{elec,j,y}
Unit	tCO ₂ e/MWh
Description	Emissions factor for electricity consumed by process “j” in year “y”
Source of data	The registered PDD
Value(s) applied	1.30
Choice of data or measurement methods and procedures	Determined in the registered PDD. According to the registered PDD, emission factor of grid electricity in Korea was around 0.56tCO ₂ e/MWh when the registered PDD was developed. Hence, 1.3 was considered to be a conservative assumption. Value to be fixed during all the crediting period
Purpose of data/parameter	Project emissions calculation
Additional comments	As per the description in the registered PDD, the emission factor of grid electricity in Korea was around 0.56 tCO ₂ e/MWh. Hence, 1.3 is considered to be a conservative assumption Value to be fixed during all the crediting period

Data/Parameter	TDL_{j,y}
Unit	-
Description	Average technical transmission and distribution losses for providing electricity to source j year y
Source of data	The registered PDD, and the adopted value is in line with “Tool to calculate baseline, project and/or leakage emissions from electricity consumption”
Value(s) applied	20%
Choice of data or measurement methods and procedures	Default value of “Tool to calculate baseline, project and/or leakage emissions from electricity consumption” (version 01) is applied.
Purpose of data/parameter	Project emissions calculation
Additional comments	-

Data/Parameter	TI_{SF6,used,t}
Unit	tonnes gas
Description	Used gas vented during eligible testing item for the historical baseline year
Source of data	The registered PDD
Value(s) applied	6.9452

Choice of data or measurement methods and procedures	Testing records of calendar year 2007 was used to determine the parameter in the registered PDD by using Method 2: Reconstruction based on Manufacturer Specification/Nameplate or estimated equipment capacity and procedures described in Annex A of the methodology and also all "CDM Records" as required by the procedure. Please refer to Annex 3 of the registered PDD for more detailed records.
Purpose of data/parameter	Baseline emissions calculation
Additional comments	-

Data/Parameter	NT_{BL,k}
Unit	-
Description	Average number of eligible testing items where venting occurred per equipment in the baseline, for category k
Source of data	The registered PDD
Value(s) applied	For k category 12 - 405kV, NT _{BL,1} : 2.76 For k category 406 - 800 kV, NT _{BL,2} : 1.90
Choice of data or measurement methods and procedures	Determined in the registered PDD
Purpose of data/parameter	Baseline emissions calculation
Additional comments	-

Data/Parameter	L_{SF6,hist,j}
Unit	tonnes SF ₆
Description	Historical amount of SF ₆ loss from point j, tonnes SF ₆
Source of data	The registered PDD and it's estimated according to the records of the SF ₆ reclamation site
Value(s) applied	0.434
Choice of data or measurement methods and procedures	Determined in the registered PDD
Purpose of data/parameter	Project emissions calculation
Additional comments	-

Data/Parameter	P_{SF6,hist}
Unit	tonnes SF ₆
Description	Production of SF ₆ during the historical period, tonnes SF ₆
Source of data	The registered PDD and it's estimated according to the records of the SF ₆ reclamation site
Value(s) applied	748.608
Choice of data or measurement methods and procedures	Determined in the registered PDD
Purpose of data/parameter	Project emissions calculation
Additional comments	-

D.2. Data and parameters monitored

(Copy this table for each data or parameter.)

Data/Parameter	GWP_{SF_6}
Unit	tCO ₂ e/tSF ₆
Description	Global warming potential of SF ₆
Measured/calculated/default	Default
Source of data	IPCC Fourth Assessment Report;
Value(s) of monitored parameter	22,800 for the second commitment period of the Kyoto Protocol (for all emission reductions achieved starting Jan 1 st 2013)
Monitoring equipment	-
Measuring/reading/recording frequency	-
Calculation method (if applicable)	-
QA/QC procedures	-
Purpose of data/parameter	Baseline emissions calculation
Additional comments	-

Data/Parameter	$W_{SF_6,BL, hist,y}$																								
Unit	tonnes SF ₆ / tonnes gas																								
Description	Concentration of SF ₆ in used gas in the baseline, to be used as a substitute for $W_{SF_6,hist}$ where the record of the concentration of SF ₆ in the gas vented in the baseline is not available																								
Measured/calculated/default	Measured and calculated The 50% of cylinder bundles that represent the most conservative measurements are used to the parameter definition.																								
Source of data	Laboratory test results																								
Value(s) of monitored parameter	<table border="1"> <thead> <tr> <th>i</th><th>Value</th></tr> </thead> <tbody> <tr><td>CDM-16007</td><td>97.66%</td></tr> <tr><td>CDM-17001</td><td>99.76%</td></tr> <tr><td>CDM-17002</td><td>99.76%</td></tr> <tr><td>CDM-17003</td><td>99.90%</td></tr> <tr><td>CDM-17004</td><td>98.96%</td></tr> <tr><td>CDM-17005</td><td>99.92%</td></tr> <tr><td>CDM-17006</td><td>99.37%</td></tr> <tr><td>CDM-17007</td><td>99.24%</td></tr> <tr><td>CDM-17008</td><td>99.26%</td></tr> <tr><td>CDM-17009</td><td>95.75%</td></tr> <tr> <td>$W_{SF_6,BL,hist,y}$</td><td>98.17%</td></tr> </tbody> </table> <p>Note: only the data of 5 cylinder bundles of lower SF₆ concentration (out of 10 cylinder bundles) is used for calculation for conservative reason.</p>	i	Value	CDM-16007	97.66%	CDM-17001	99.76%	CDM-17002	99.76%	CDM-17003	99.90%	CDM-17004	98.96%	CDM-17005	99.92%	CDM-17006	99.37%	CDM-17007	99.24%	CDM-17008	99.26%	CDM-17009	95.75%	$W_{SF_6,BL,hist,y}$	98.17%
i	Value																								
CDM-16007	97.66%																								
CDM-17001	99.76%																								
CDM-17002	99.76%																								
CDM-17003	99.90%																								
CDM-17004	98.96%																								
CDM-17005	99.92%																								
CDM-17006	99.37%																								
CDM-17007	99.24%																								
CDM-17008	99.26%																								
CDM-17009	95.75%																								
$W_{SF_6,BL,hist,y}$	98.17%																								

Monitoring equipment	Monitoring equipment	Gas Chromatograph
	Serial No.	CN10622030
	Calibration frequency	2 years
	Accuracy	The detection limit of all the gases analysed is at least 50 ppm.
	Calibration Agency	SFK
	Date of calibration	23 Oct 2015 13 Oct 2017
	Validity of calibration	2 years
Measuring/reading/recording frequency	The gas sample is collected every time a cylinder bundle arrives at SFK plant. This sample is analyzed in SFK laboratory using Gas Chromatography tests in accordance with the internal Standard Operational Procedure (SOP). The detection limit of all the gases analysed will be at least 50 ppm.	
Calculation method (if applicable)	-	
QA/QC procedures	The SOP uses ASTM D 2685, ASTM D 2029, ASTM D 2284, DIN IEC 60376, VDE 0373, ASTM 2472 and/or other sector, national or international Standards.	
Purpose of data/parameter	Baseline emissions calculation	
Additional comments	This variable does not exist in equations, however provided in monitoring table to be used as substitute to the variable $W_{SF6,hist}$	

Data/Parameter	$Q_{SF6,k,j,y}$		
Unit	tonnes SF_6		
Description	Mass of SF_6 that is filled into equipment j of category k in the year y at the SF_6 recovery site		
Measured/calculated/default	Measured		
Source of data	Records from the SF_6 recovery site		
Value(s) of monitored parameter	$Q_{SF6,1}$: mass of SF_6 that is filled into testing equipment of category 1 (12 to 405 KV) $Q_{SF6,2}$: mass of SF_6 that is filled into testing equipment of category 2 (406 to 800 KV) $Q_{SF6,1} = 4.76$ t, $Q_{SF6,2} = 4.99$ t;		
Monitoring equipment	Monitoring equipment	Mass flow meter	Mass flow meter
	Serial No.	14122007	14111339
	Calibration frequency	5years, recommended by FMTech Co., Ltd	5years, recommended by FMTech Co., Ltd
	Accuracy	$\pm 0.100\%$	$\pm 0.100\%$
	Calibration Agency	FMTech Co., Ltd	FMTech Co., Ltd
	Date of calibration	25 May 2012 15 May 2017	21 May 2012 15 May 2017
	Validity of calibration	5 years	5 years
Measuring/reading/recording frequency	Measuring continuously and recording after each injection		
Calculation method (if applicable)	-		
QA/QC procedures	Meters subject to regular calibration according to standard FMT-QG-06		
Purpose of data/parameter	Baseline emissions calculation		
Additional comments	-		

Data/Parameter	MR_{Gas,i,y}																								
Unit	tonnes gas																								
Description	Mass of used SF ₆ recovered into cylinder bundle i at the SF ₆ recovery site in year y																								
Measured/calculated/default	Measured																								
Source of data	Records from the SF ₆ recovery site																								
Value(s) of monitored parameter	<table border="1"> <thead> <tr> <th>i</th><th>MR_{Gas} (kg)</th></tr> </thead> <tbody> <tr><td>CDM-16007</td><td>950.50</td></tr> <tr><td>CDM-17001</td><td>1,010.60</td></tr> <tr><td>CDM-17002</td><td>912.00</td></tr> <tr><td>CDM-17003</td><td>1,134.80</td></tr> <tr><td>CDM-17004</td><td>1,011.00</td></tr> <tr><td>CDM-17005</td><td>988.90</td></tr> <tr><td>CDM-17006</td><td>739.50</td></tr> <tr><td>CDM-17007</td><td>385.80</td></tr> <tr><td>CDM-17008</td><td>867.90</td></tr> <tr><td>CDM-17009</td><td>414.90</td></tr> <tr><td>Sum</td><td>8,415.90</td></tr> </tbody> </table>	i	MR _{Gas} (kg)	CDM-16007	950.50	CDM-17001	1,010.60	CDM-17002	912.00	CDM-17003	1,134.80	CDM-17004	1,011.00	CDM-17005	988.90	CDM-17006	739.50	CDM-17007	385.80	CDM-17008	867.90	CDM-17009	414.90	Sum	8,415.90
i	MR _{Gas} (kg)																								
CDM-16007	950.50																								
CDM-17001	1,010.60																								
CDM-17002	912.00																								
CDM-17003	1,134.80																								
CDM-17004	1,011.00																								
CDM-17005	988.90																								
CDM-17006	739.50																								
CDM-17007	385.80																								
CDM-17008	867.90																								
CDM-17009	414.90																								
Sum	8,415.90																								
Monitoring equipment	<table border="1"> <thead> <tr> <th>Monitoring equipment</th><th>Mass flow meter</th></tr> </thead> <tbody> <tr><td>Serial No.</td><td>14069408</td></tr> <tr><td>Calibration frequency</td><td>5years, recommended by FMTech Co., Ltd</td></tr> <tr><td>Accuracy</td><td>±0.100%</td></tr> <tr><td>Calibration Agency</td><td>FMTech Co., Ltd</td></tr> <tr><td>Date of calibration</td><td>25 May 2012</td></tr> <tr><td></td><td>15 May 2017</td></tr> <tr><td>Validity of calibration</td><td>5 years</td></tr> </tbody> </table>	Monitoring equipment	Mass flow meter	Serial No.	14069408	Calibration frequency	5years, recommended by FMTech Co., Ltd	Accuracy	±0.100%	Calibration Agency	FMTech Co., Ltd	Date of calibration	25 May 2012		15 May 2017	Validity of calibration	5 years								
Monitoring equipment	Mass flow meter																								
Serial No.	14069408																								
Calibration frequency	5years, recommended by FMTech Co., Ltd																								
Accuracy	±0.100%																								
Calibration Agency	FMTech Co., Ltd																								
Date of calibration	25 May 2012																								
	15 May 2017																								
Validity of calibration	5 years																								
Measuring/reading/recording frequency	Measuring continuously and recording after each recovery of the SF ₆ being vented																								
Calculation method (if applicable)	-																								
QA/QC procedures	Meter subject to regular calibration according to standard FMT-QG-06																								
Purpose of data/parameter	Baseline emissions calculation																								
Additional comments	-																								

Data/Parameter	MS_{Gas,i,y}
Unit	Tonnes of gas
Description	Mass of used gas stored in recovery cylinder bundle i in year y
Measured/calculated/default	Measured
Source of data	Records from SF6 recovery site

Value(s) of monitored parameter	<table border="1"> <thead> <tr> <th>i</th> <th>MS_{Gas} (kg)</th> </tr> </thead> <tbody> <tr><td>CDM-16007</td><td>974.00</td></tr> <tr><td>CDM-17001</td><td>1,020.50</td></tr> <tr><td>CDM-17002</td><td>926.00</td></tr> <tr><td>CDM-17003</td><td>1,147.50</td></tr> <tr><td>CDM-17004</td><td>1,020.00</td></tr> <tr><td>CDM-17005</td><td>991.00</td></tr> <tr><td>CDM-17006</td><td>716.50</td></tr> <tr><td>CDM-17007</td><td>375.50</td></tr> <tr><td>CDM-17008</td><td>858.00</td></tr> <tr><td>CDM-17009</td><td>372.00</td></tr> <tr><td>Sum</td><td>8,401.00</td></tr> </tbody> </table>	i	MS _{Gas} (kg)	CDM-16007	974.00	CDM-17001	1,020.50	CDM-17002	926.00	CDM-17003	1,147.50	CDM-17004	1,020.00	CDM-17005	991.00	CDM-17006	716.50	CDM-17007	375.50	CDM-17008	858.00	CDM-17009	372.00	Sum	8,401.00
	i	MS _{Gas} (kg)																							
	CDM-16007	974.00																							
	CDM-17001	1,020.50																							
	CDM-17002	926.00																							
	CDM-17003	1,147.50																							
	CDM-17004	1,020.00																							
	CDM-17005	991.00																							
	CDM-17006	716.50																							
	CDM-17007	375.50																							
	CDM-17008	858.00																							
	CDM-17009	372.00																							
Sum	8,401.00																								
<table border="1"> <thead> <tr> <th>Monitoring equipment</th> <th>Weighing Scale</th> </tr> </thead> <tbody> <tr><td>Serial No.</td><td>FR3</td></tr> <tr><td>Calibration frequency</td><td>2 years</td></tr> <tr><td>Accuracy</td><td>0.5kg/5000kg</td></tr> <tr><td>Calibration Agency</td><td>Pyunghwa HiTech</td></tr> <tr><td>Date of calibration</td><td>25 Nov 2015</td></tr> <tr><td></td><td>07 Nov 2017</td></tr> <tr><td>Validity of calibration</td><td>2 years</td></tr> </tbody> </table>	Monitoring equipment	Weighing Scale	Serial No.	FR3	Calibration frequency	2 years	Accuracy	0.5kg/5000kg	Calibration Agency	Pyunghwa HiTech	Date of calibration	25 Nov 2015		07 Nov 2017	Validity of calibration	2 years									
Monitoring equipment	Weighing Scale																								
Serial No.	FR3																								
Calibration frequency	2 years																								
Accuracy	0.5kg/5000kg																								
Calibration Agency	Pyunghwa HiTech																								
Date of calibration	25 Nov 2015																								
	07 Nov 2017																								
Validity of calibration	2 years																								
Measuring/reading/recording frequency	Measuring and recording for each bundle of cylinders																								
Calculation method (if applicable)	-																								
QA/QC procedures	Meter subject to regular calibration according to standard KML-CAL-M05 and PH-I003																								
Purpose of data/parameter	Baseline emissions calculation																								
Additional comments	-																								

Data/Parameter	MI _{Gas,i,y}
Unit	Tonnes of gas
Description	Mass of used gas from the cylinder bundle i injected into the production process for reclamation process in year y
Measured/calculated/default	Measured
Source of data	Records from SF ₆ recovery site

Value(s) of monitored parameter	<table border="1"> <thead> <tr> <th>i</th> <th>MI_{Gas} (kg)</th> </tr> </thead> <tbody> <tr><td>CDM-16007</td><td>905.00</td></tr> <tr><td>CDM-17001</td><td>930.00</td></tr> <tr><td>CDM-17002</td><td>804.00</td></tr> <tr><td>CDM-17003</td><td>1,045.00</td></tr> <tr><td>CDM-17004</td><td>922.00</td></tr> <tr><td>CDM-17005</td><td>866.00</td></tr> <tr><td>CDM-17006</td><td>642.00</td></tr> <tr><td>CDM-17007</td><td>343.00</td></tr> <tr><td>CDM-17008</td><td>775.00</td></tr> <tr><td>CDM-17009</td><td>336.00</td></tr> <tr> <td>Sum</td> <td>7,568.00</td> </tr> </tbody> </table>	i	MI _{Gas} (kg)	CDM-16007	905.00	CDM-17001	930.00	CDM-17002	804.00	CDM-17003	1,045.00	CDM-17004	922.00	CDM-17005	866.00	CDM-17006	642.00	CDM-17007	343.00	CDM-17008	775.00	CDM-17009	336.00	Sum	7,568.00
	i	MI _{Gas} (kg)																							
	CDM-16007	905.00																							
	CDM-17001	930.00																							
	CDM-17002	804.00																							
	CDM-17003	1,045.00																							
	CDM-17004	922.00																							
	CDM-17005	866.00																							
	CDM-17006	642.00																							
	CDM-17007	343.00																							
	CDM-17008	775.00																							
	CDM-17009	336.00																							
Sum	7,568.00																								
Monitoring equipment	<table border="1"> <thead> <tr> <th>Monitoring equipment</th> <th>Mass flow meter</th> </tr> </thead> <tbody> <tr> <td>Serial No.</td> <td>14014422</td> </tr> <tr> <td>Calibration frequency</td> <td>5years, recommended by FMTech Co., Ltd</td> </tr> <tr> <td>Accuracy</td> <td>±0.100%</td> </tr> <tr> <td>Calibration Agency</td> <td>FMTech Co., Ltd</td> </tr> <tr> <td>Date of calibration</td> <td>21 May 2012</td> </tr> <tr> <td></td> <td>16 May 2017</td> </tr> <tr> <td>Validity of calibration</td> <td>5 years</td> </tr> </tbody> </table>	Monitoring equipment	Mass flow meter	Serial No.	14014422	Calibration frequency	5years, recommended by FMTech Co., Ltd	Accuracy	±0.100%	Calibration Agency	FMTech Co., Ltd	Date of calibration	21 May 2012		16 May 2017	Validity of calibration	5 years								
Monitoring equipment	Mass flow meter																								
Serial No.	14014422																								
Calibration frequency	5years, recommended by FMTech Co., Ltd																								
Accuracy	±0.100%																								
Calibration Agency	FMTech Co., Ltd																								
Date of calibration	21 May 2012																								
	16 May 2017																								
Validity of calibration	5 years																								
Measuring/reading/recording frequency	Measuring continuously and recording after each injection of the SF ₆ into the SF ₆ production line																								
Calculation method (if applicable)	-																								
QA/QC procedures	Meter subject to regular calibration according to standard FMT-QG-06																								
Purpose of data/parameter	Baseline emissions calculation																								
Additional comments	-																								

Data/Parameter	L _{SF₆,y,i,j}
Unit	Tonnes SF ₆
Description	Amount of SF ₆ loss from point j during the reclamation period of cylinder i in year y
Measured/calculated/default	Measured and calculated The measurement period is the period in which cylinder i is connected for gas reclamation
Source of data	Records from SF ₆ reclamation site

Value(s) of monitored parameter	<table border="1"> <thead> <tr> <th>i</th> <th>$L_{SF6,y,i,j}$ (kg)</th> </tr> </thead> <tbody> <tr><td>CDM-16007</td><td>55.21</td></tr> <tr><td>CDM-17001</td><td>138.40</td></tr> <tr><td>CDM-17002</td><td>46.32</td></tr> <tr><td>CDM-17003</td><td>93.27</td></tr> <tr><td>CDM-17004</td><td>65.65</td></tr> <tr><td>CDM-17005</td><td>47.64</td></tr> <tr><td>CDM-17006</td><td>46.90</td></tr> <tr><td>CDM-17007</td><td>40.78</td></tr> <tr><td>CDM-17008</td><td>89.92</td></tr> <tr><td>CDM-17009</td><td>1.41</td></tr> </tbody> </table>	i	$L_{SF6,y,i,j}$ (kg)	CDM-16007	55.21	CDM-17001	138.40	CDM-17002	46.32	CDM-17003	93.27	CDM-17004	65.65	CDM-17005	47.64	CDM-17006	46.90	CDM-17007	40.78	CDM-17008	89.92	CDM-17009	1.41
	i	$L_{SF6,y,i,j}$ (kg)																					
	CDM-16007	55.21																					
	CDM-17001	138.40																					
	CDM-17002	46.32																					
	CDM-17003	93.27																					
	CDM-17004	65.65																					
	CDM-17005	47.64																					
	CDM-17006	46.90																					
	CDM-17007	40.78																					
	CDM-17008	89.92																					
CDM-17009	1.41																						
Monitoring equipment	<table border="1"> <thead> <tr> <th>Monitoring equipment</th> <th>Mass flow meter</th> </tr> </thead> <tbody> <tr><td>Serial No.</td><td>14014074</td></tr> <tr><td>Calibration frequency</td><td>5years, recommended by FMTech Co., Ltd</td></tr> <tr><td>Accuracy</td><td>±0.35%</td></tr> <tr><td>Calibration Agency</td><td>FMTech Co., Ltd</td></tr> <tr><td>Date of calibration</td><td>24 May 2012</td></tr> <tr><td></td><td>15 May 2017</td></tr> <tr><td>Validity of calibration</td><td>5 years</td></tr> </tbody> </table>	Monitoring equipment	Mass flow meter	Serial No.	14014074	Calibration frequency	5years, recommended by FMTech Co., Ltd	Accuracy	±0.35%	Calibration Agency	FMTech Co., Ltd	Date of calibration	24 May 2012		15 May 2017	Validity of calibration	5 years						
	Monitoring equipment	Mass flow meter																					
	Serial No.	14014074																					
	Calibration frequency	5years, recommended by FMTech Co., Ltd																					
	Accuracy	±0.35%																					
	Calibration Agency	FMTech Co., Ltd																					
	Date of calibration	24 May 2012																					
		15 May 2017																					
	Validity of calibration	5 years																					
	<table border="1"> <thead> <tr> <th>Monitoring equipment</th> <th>Gas Chromatograph</th> </tr> </thead> <tbody> <tr><td>Serial No.</td><td>CN10622030</td></tr> <tr><td>Calibration frequency</td><td>2 years</td></tr> <tr><td>Accuracy</td><td>The detection limit of all the gases analysed is at least 50 ppm.</td></tr> <tr><td>Calibration Agency</td><td>SFK</td></tr> <tr><td>Date of calibration</td><td>23 Oct 2015</td></tr> <tr><td></td><td>13 Oct 2017</td></tr> <tr><td>Validity of calibration</td><td>2 years</td></tr> </tbody> </table>	Monitoring equipment	Gas Chromatograph	Serial No.	CN10622030	Calibration frequency	2 years	Accuracy	The detection limit of all the gases analysed is at least 50 ppm.	Calibration Agency	SFK	Date of calibration	23 Oct 2015		13 Oct 2017	Validity of calibration	2 years						
	Monitoring equipment	Gas Chromatograph																					
	Serial No.	CN10622030																					
	Calibration frequency	2 years																					
	Accuracy	The detection limit of all the gases analysed is at least 50 ppm.																					
	Calibration Agency	SFK																					
Date of calibration	23 Oct 2015																						
	13 Oct 2017																						
Validity of calibration	2 years																						
Measuring/reading/recording frequency	Mass flow meter: Measuring continuously and recording daily Gas Chromatograph: Measuring daily;																						
Calculation method (if applicable)	$L_{SF6,y,i,j}$ = Daily purge mass amount of gas × Volume% of SF ₆																						
QA/QC procedures	Meter subject to regular calibration according to standard FMT-QG-06																						
Purpose of data/parameter	Project emissions reduction																						
Additional comments	-																						

Data/Parameter	$P_{SF6,y,i}$
Unit	Tonnes SF ₆
Description	Production of SF ₆ during the reclamation period of cylinder i, in year y
Measured/calculated/default	Measured
Source of data	Records from regular production monitoring at SF ₆ reclamation site

Value(s) of monitored parameter	<table border="1"> <thead> <tr> <th>i</th> <th>P_{SF6,y,i} (kg)</th> </tr> </thead> <tbody> <tr><td>CDM-16007</td><td>42,857</td></tr> <tr><td>CDM-17001</td><td>59,846</td></tr> <tr><td>CDM-17002</td><td>38,638</td></tr> <tr><td>CDM-17003</td><td>47,583</td></tr> <tr><td>CDM-17004</td><td>41,014</td></tr> <tr><td>CDM-17005</td><td>36,851</td></tr> <tr><td>CDM-17006</td><td>31,056</td></tr> <tr><td>CDM-17007</td><td>25,164</td></tr> <tr><td>CDM-17008</td><td>36,512</td></tr> <tr><td>CDM-17009</td><td>11,228</td></tr> </tbody> </table>	i	P _{SF6,y,i} (kg)	CDM-16007	42,857	CDM-17001	59,846	CDM-17002	38,638	CDM-17003	47,583	CDM-17004	41,014	CDM-17005	36,851	CDM-17006	31,056	CDM-17007	25,164	CDM-17008	36,512	CDM-17009	11,228
	i	P _{SF6,y,i} (kg)																					
	CDM-16007	42,857																					
	CDM-17001	59,846																					
	CDM-17002	38,638																					
	CDM-17003	47,583																					
	CDM-17004	41,014																					
	CDM-17005	36,851																					
	CDM-17006	31,056																					
	CDM-17007	25,164																					
	CDM-17008	36,512																					
	CDM-17009	11,228																					
Monitoring equipment	<p>There are two storage tanks, so called daily tank, which are operated alternatively day by day. Daily production amount is stored to A and B tank alternatively day by day for quality check and is transferred to a third big storage tank (weekly tanks) for SF₆ filling work.</p> <p>As SF₆ is a liquefied gas in the storage tank, it is difficult to measure the amount directly so by measuring the difference of tank level (volume), temperature and pressure of daily tank between certain time point of the day to the time point of next day, the daily production amount is calculated.</p>																						
Measuring/reading/recording frequency	Measured and recorded daily																						
Calculation method (if applicable)	-																						
QA/QC procedures	<p>The measurement period is the period in which cylinder <i>i</i> is connected for gas reclamation, as measured in days. Production to be measured daily.</p> <p>The production measurement will follow the Specific Operational Procedure (SOP) SFK-SOP-SF6-086, where is defined the detailed procedure, the responsible for measuring it, the reporting system and the equipments(Level gauge, pressure, temperature of daily tank) used to measure. The accuracy of each monitoring equipment will be at least:</p> <p><input type="checkbox"/> Level gauge : ±50mm</p> <p><input type="checkbox"/> Pressure gauge : ± 0.5%</p> <p><input type="checkbox"/> Temperature : ± 0.5 %</p>																						
Purpose of data/parameter	Project emissions reduction																						
Additional comments	-																						

Data/Parameter	NT _{PJ,k,y}						
Unit	N/A						
Description	Average number of total testing items where recovery was done per equipment in the project, for category k						
Measured/calculated/default	Calculated						
Source of data	Records from the SF ₆ recovery site						
Value(s) of monitored parameter	<table border="1"> <thead> <tr> <th></th> <th>NT_{PJ,i}</th> </tr> </thead> <tbody> <tr> <td>NT_{PJ,1} (for category: 12~405 kV)</td> <td>2.77</td> </tr> <tr> <td>NT_{PJ,2} (for category: 406~800 kV)</td> <td>2.78</td> </tr> </tbody> </table>		NT _{PJ,i}	NT _{PJ,1} (for category: 12~405 kV)	2.77	NT _{PJ,2} (for category: 406~800 kV)	2.78
		NT _{PJ,i}					
	NT _{PJ,1} (for category: 12~405 kV)	2.77					
NT _{PJ,2} (for category: 406~800 kV)	2.78						

Monitoring equipment	-
Measuring/reading/recording frequency	-
Calculation method (if applicable)	Count the number of testing items where gas was recovered for the year y, by referring to the testing records compiled during the project year at the SF ₆ recovery site. Count the number of equipment in each category for the year y, by referring to the testing records compiled during the project year at the SF ₆ recovery site. For each category k, make an average of the counts for equipment in that category to derive NT _{PJ,k,y}
QA/QC procedures	-
Purpose of data/parameter	Baseline emissions reduction
Additional comments	-

Data/Parameter	i																						
Unit	N/A																						
Description	Sub-index used for each cylinder bundle that completed a recovery-reclamation cycle included in the estimation of emissions avoided for the year y																						
Measured/calculated/default	-																						
Source of data	Records from the SF ₆ recovery site and SF ₆ reclamation site																						
Value(s) of monitored parameter	<p>The relation between the Sub-index “i” and the number of cylinder bundle “n” is illustrated below.</p> <table border="1"> <thead> <tr> <th>i</th><th>n</th></tr> </thead> <tbody> <tr><td>CDM-16007</td><td>0002</td></tr> <tr><td>CDM-17001</td><td>0004</td></tr> <tr><td>CDM-17002</td><td>0003</td></tr> <tr><td>CDM-17003</td><td>0001</td></tr> <tr><td>CDM-17004</td><td>0003</td></tr> <tr><td>CDM-17005</td><td>0004</td></tr> <tr><td>CDM-17006</td><td>0001</td></tr> <tr><td>CDM-17007</td><td>0003</td></tr> <tr><td>CDM-17008</td><td>0004</td></tr> <tr><td>CDM-17009</td><td>0003</td></tr> </tbody> </table>	i	n	CDM-16007	0002	CDM-17001	0004	CDM-17002	0003	CDM-17003	0001	CDM-17004	0003	CDM-17005	0004	CDM-17006	0001	CDM-17007	0003	CDM-17008	0004	CDM-17009	0003
i	n																						
CDM-16007	0002																						
CDM-17001	0004																						
CDM-17002	0003																						
CDM-17003	0001																						
CDM-17004	0003																						
CDM-17005	0004																						
CDM-17006	0001																						
CDM-17007	0003																						
CDM-17008	0004																						
CDM-17009	0003																						
Monitoring equipment	-																						
Measuring/reading/recording frequency	-																						
Calculation method (if applicable)	-																						
QA/QC procedures	When used gas is filled into a recovery cylinder bundle, weighed, and sent for reclaiming, the activity should be noted using the cylinder bundle identification information																						
Purpose of data/parameter	-																						
Additional comments	Recovery cylinder bundles must be visibly distinguishable from new gas cylinder bundles. Records from both sites should coincide An individual cylinder bundle may be used more than one time per year, i.e. it may go through the recovery-reclamation process more than once. However, the labelling will show the unique identity of each cylinder bundle as it is involved in one recovery- reclamation process																						

Data/Parameter	n																						
Unit	N/A																						
Description	Number of cylinder bundles that completed a recovery-reclamation cycle in the year y. Only these cylinder bundles are eligible to be included in the estimation of emissions avoided for the year y																						
Measured/calculated/default	-																						
Source of data	Records from the SF ₆ recovery site and SF ₆ reclamation site																						
Value(s) of monitored parameter	<p>The relation between the Sub-index “i” and the number of cylinder bundle “n” is illustrated below.</p> <table border="1"> <thead> <tr> <th>i</th><th>n</th></tr> </thead> <tbody> <tr> <td>CDM-16007</td><td>0002</td></tr> <tr> <td>CDM-17001</td><td>0004</td></tr> <tr> <td>CDM-17002</td><td>0003</td></tr> <tr> <td>CDM-17003</td><td>0001</td></tr> <tr> <td>CDM-17004</td><td>0003</td></tr> <tr> <td>CDM-17005</td><td>0004</td></tr> <tr> <td>CDM-17006</td><td>0001</td></tr> <tr> <td>CDM-17007</td><td>0003</td></tr> <tr> <td>CDM-17008</td><td>0004</td></tr> <tr> <td>CDM-17009</td><td>0003</td></tr> </tbody> </table>	i	n	CDM-16007	0002	CDM-17001	0004	CDM-17002	0003	CDM-17003	0001	CDM-17004	0003	CDM-17005	0004	CDM-17006	0001	CDM-17007	0003	CDM-17008	0004	CDM-17009	0003
i	n																						
CDM-16007	0002																						
CDM-17001	0004																						
CDM-17002	0003																						
CDM-17003	0001																						
CDM-17004	0003																						
CDM-17005	0004																						
CDM-17006	0001																						
CDM-17007	0003																						
CDM-17008	0004																						
CDM-17009	0003																						
Monitoring equipment	-																						
Measuring/reading/recording frequency	-																						
Calculation method (if applicable)	-																						
QA/QC procedures	The site keeps records of each cylinder bundle i for which recovery and reclamation has been completed. All individual identification and dates information are available for a clear definition of each year y the process was finished.																						
Purpose of data/parameter	-																						
Additional comments	Records from both sites should coincide. In the case in which a cylinder bundle has not completed reclamation in year y, it will be accounted in year y+1 as mentioned in Step 2 of baseline emissions of the methodology																						

Data/Parameter	W_{SF6,i}
Unit	Tonnes SF ₆ / tonnes gas
Description	Concentration of SF ₆ in the cylinder bundle i
Measured/calculated/default	Measured
Source of data	laboratory test result

Value(s) of monitored parameter	i	Value														
	CDM-16007	97.66%														
	CDM-17001	99.76%														
	CDM-17002	99.76%														
	CDM-17003	99.90%														
	CDM-17004	98.96%														
	CDM-17005	99.92%														
	CDM-17006	99.37%														
	CDM-17007	99.24%														
	CDM-17008	99.26%														
	CDM-17009	95.75%														
Monitoring equipment	<table border="1"> <tr> <td>Monitoring equipment</td> <td>Gas Chromatograph</td> </tr> <tr> <td>Serial No.</td> <td>CN10622030</td> </tr> <tr> <td>Calibration frequency</td> <td>2 years</td> </tr> <tr> <td>Accuracy</td> <td>The detection limit of all the gases analysed is at least 50 ppm.</td> </tr> <tr> <td>Calibration Agency</td> <td>SFK</td> </tr> <tr> <td>Date of calibration</td> <td>23 Oct 2015 13 Oct 2017</td> </tr> <tr> <td>Validity of calibration</td> <td>2 years</td> </tr> </table>		Monitoring equipment	Gas Chromatograph	Serial No.	CN10622030	Calibration frequency	2 years	Accuracy	The detection limit of all the gases analysed is at least 50 ppm.	Calibration Agency	SFK	Date of calibration	23 Oct 2015 13 Oct 2017	Validity of calibration	2 years
	Monitoring equipment	Gas Chromatograph														
	Serial No.	CN10622030														
	Calibration frequency	2 years														
	Accuracy	The detection limit of all the gases analysed is at least 50 ppm.														
	Calibration Agency	SFK														
	Date of calibration	23 Oct 2015 13 Oct 2017														
	Validity of calibration	2 years														
Measuring/reading/recording frequency	The gas sample is collected every time a cylinder bundle arrives in SFK plant. This sample is analysed in SFK laboratory using Gas Chromatography tests in accordance with the internal Standard Operational Procedure (SOP). The detection limit of all the gases analysed is at least 50 ppm.															
Calculation method (if applicable)	-															
QA/QC procedures	The SOP uses ASTM D 2685, ASTM D 2029, ASTM D 2284, Din IEC 60376, VDE 0373, ASTM 2472 and/or other sector, national or international Standards.															
Purpose of data/parameter	Baseline emissions calculation															
Additional comments	Given that the recovery and reclamation process are batch processes, and that the concentration of SF ₆ in the used gas remains constant after recovery and before reclamation, w _{SF₆,i} needs to be measured only once per cylinder bundle to determine the proportion of SF ₆ in the gas contained in that cylinder bundle.															

Data/Parameter	PE_{TF,y}
Unit	tCO ₂ e
Description	Project emissions as a result of increased electricity consumption at the testing facility attributable to project activity in year y
Measured/calculated/default	Calculated
Source of data	Records from SF ₆ testing facility
Value(s) of monitored parameter	230.95
Monitoring equipment	-
Measuring/reading/recording frequency	-
Calculation method (if applicable)	Follow the "Tool to calculate baseline, project and/or leakage emissions from electricity consumption"; Electricity consumption approximated by the rated capacity of the operating equipment multiplied by operating hours of the equipment. Please refer to Section E.2
QA/QC procedures	-
Purpose of data/parameter	Project emissions calculation

Additional comments	-
---------------------	---

Data/Parameter	PE_{RF,y}
Unit	tCO ₂ e
Description	Project emissions as a result of increased electricity consumption at the reclamation facility attributable to project activity in year y
Measured/calculated/default	Calculated
Source of data	Records from SF ₆ reclamation facility
Value(s) of monitored parameter	0.08
Monitoring equipment	-
Measuring/reading/recording frequency	-
Calculation method (if applicable)	Electricity consumption approximated by the rated capacity of the operating equipment multiplied by operating hours of the equipment. Please refer to Section E.2
QA/QC procedures	-
Purpose of data/parameter	Project emissions calculation
Additional comments	-

Data/Parameter	EXC _{SF₆,y}		
Unit	Tonnes SF ₆		
Description	Quantity of SF ₆ which was being injected to the reclamation facility during exceptional events occurred in year y		
Measured/calculated/default	Measured		
Source of data	Records from SF ₆ reclamation facility		
Value(s) of monitored parameter		i	EXC _{SF₆,y} (kg)
		CDM-16007	0.00
		CDM-17001	0.00
		CDM-17002	0.00
		CDM-17003	0.00
		CDM-17004	2.00
		CDM-17005	0.00
		CDM-17006	0.00
		CDM-17007	0.00
		CDM-17008	0.00
		CDM-17009	0.00
		Sum	2.00

Monitoring equipment	Monitoring equipment	Mass flow meter
	Serial No.	14014422
	Calibration frequency	5years, recommended by FMTech Co., Ltd
	Accuracy	±0.100%
	Calibration Agency	FMTech Co., Ltd
	Date of calibration	21 May 2012 16 May 2017
	Validity of calibration	5 years
Measuring/reading/recording frequency	<p>The project proponent records the date and time of any exceptional event that occurs in year y that results in the unusual emission of SF₆</p> <p>The SF₆ quantity (EXC_{SF6,y}) from any reclamation that coincides with the event must be considered as project emissions (PE_{EXC,y})</p> <p>For example, if a cylinder bundle of used gas was being reclaimed when the event occurred, then the total amount of gas injected from the cylinder bundle into the reclamation line between 5 hours prior to the event and until the time that the injection line was shut off must be considered as EXC_{SF6,y}.</p> <p>The total amount of gas is to be taken from the continuous measurement of the flow meter on the injection line used to determine MI_{Gas,i}.</p> <p>The concentration of the SF₆ was considered as 1 for the calculation of EXC_{SF6,y}, and this is conservative.</p>	
Calculation method (if applicable)	-	
QA/QC procedures	-	
Purpose of data/parameter	Project emissions calculation	
Additional comments	-	

D.3. Implementation of sampling plan

>>

Not applicable.

SECTION E. Calculation of emission reductions or net anthropogenic removals

E.1. Calculation of baseline emissions or baseline net removals

>>

According to Standard for application of the global warming potentials to Clean Development Mechanism project activities and programmes of activities for the second commitment period of the Kyoto Protocol (version 01), for emission reductions achieved starting 1 January 2013, the updated global warming potentials of SF₆ should be used, which is 22,800 (GWP_{SF6}).

Baseline Emission Reduction Calculations

In this section the baseline emission reduction calculation equation is explained. The formula for calculation of Emission Reductions is:

$$BE_y = MIN\{V_{SF6,hist}, DFT_y * EA_y\} * GWP_{SF6}$$

Where:

BE_y	=	Baseline emissions year y, tCO ₂ e
DFT_y	=	Discount factor for testing in year y
EA_y	=	Quantity of SF ₆ reclaimed during the year y, tonnes SF ₆
$V_{SF6,hist}$	=	Historical annual baseline venting of SF ₆ , tonnes SF ₆
GWP_{SF6}	=	Global warming potential of SF ₆ , tCO ₂ e/tonnes SF ₆

Results:

Parameter	Unit	Value	Reference
DFT_y	-	0.84	Calculated
EA_y	t	7.50	Measured and calculated
$V_{SF6,hist}$	t	6.82	Calculated
GWP_{SF6}	-	22,800	default
BE_y	t	143,076	Calculated

Step1: Calculation of $V_{SF6,hist}$:

$$V_{SF6,hist} = w_{SF6,hist} \sum_t TI_{SF6,used,t}$$

Where:

- $TI_{SF6,used,t}$ = Used gas vented during eligible testing item t , tonnes gas
 $w_{SF6,hist}$ = Concentration of SF_6 expected in used gas in the historical period, tonnes SF_6 /tonnes gas

Results:

Parameter	Value	Unit	Reference
$TI_{SF6,used}$	6.9452	t	The registered PDD
$\sum TI_{SF6,used}$	6.95	t	Calculated (refer to the ER Workbook)
$w_{SF6,hist}$	98.17%	-	Measured and calculated (refer to D.2 and ER workbook)
$V_{SF6,hist}$	6.82	t	Calculated (refer to the ER Workbook)

Step 2: Calculation of EA_y

$$EA_y = \sum_i CA_{i,y} * w_{SF6,i}$$

Where:

- $CA_{i,y}$ = Cylinder minimum for cylinder i in year y , tonnes gas
 $w_{SF6,i}$ = Concentration of SF_6 in the cylinder i , tonnes SF_6 /tonnes gas

$$CA_{i,y} = \min\{MR_{Gas,i,y}, MS_{Gas,i,y}, MI_{Gas,i,y}\}$$

Where:

- $MR_{Gas,i,y}$ = Mass of used gas recovered into cylinder i at the SF_6 recovery site in year y
 $MS_{Gas,i,y}$ = Mass of used gas stored in recovery cylinder i in year y , tonnes gas
 $MI_{Gas,i,y}$ = Mass of used gas from cylinder i which is injected for reclamation process in year y , tonnes gas

Results:

i	MR_{Gas} (kg)	MS_{Gas} (kg)	MI_{Gas} (kg)	$w_{SF6,i}$	$CA_{i,y}$ (kg)	EA_i (tonne)
CDM-16007	950.50	974.00	905.00	97.66%	905.00	0.88
CDM-17001	1010.60	1020.50	930.00	99.76%	930.00	0.93
CDM-17002	912.00	926.00	804.00	99.76%	804.00	0.80
CDM-17003	1134.80	1147.50	1045.00	99.90%	1045.00	1.04
CDM-17004	1011.00	1020.00	922.00	98.96%	922.00	0.91
CDM-17005	988.90	991.00	866.00	99.92%	866.00	0.87
CDM-17006	739.50	716.50	642.00	99.37%	642.00	0.64
CDM-17007	385.80	375.50	343.00	99.24%	343.00	0.34
CDM-17008	867.90	858.00	775.00	99.26%	775.00	0.77
CDM-17009	414.90	372.00	336.00	95.75%	336.00	0.32
				Sum	7568.00	7.50

Note: please refer to D.2 and the ER Workbook for more detailed calculation.

Step 3: Calculation of DFT_y

$$DFT_y = \frac{\sum_k (Q_{SF6,k,y} * RT_{k,y})}{Q_{SF6,y}}$$

Where:

$$Q_{SF6,k,y} = \sum_j Q_{SF6,k,j,y}$$

$$Q_{SF6,y} = \sum_k Q_{SF6,k,y}$$

Where:

 DFT_y = Discount factor for testing in year y $Q_{SF6,k,y}$ = Total amount of SF₆ filled in the testing of equipments in category k in year y , tonnes SF₆ $Q_{SF6,y}$ = Total amount of SF₆ filled in testing of all equipments in the project activity in year y , tonnes SF₆ $RT_{k,y}$ = Ratio of number of eligible testing items in category k (maximum value is set at 1) $Q_{SF6,k,j,y}$ = Amount of SF₆ that is filled into equipment j of category k in year y at the SF₆ recovery site, tonnes SF₆

Parameter	Value	Unit	Reference
$Q_{SF6,1,y}$	4.76	t	Measured
$RT_{1,y}$	1.00	-	Calculated
$Q_{SF6,2,y}$	4.99	t	Measured
$RT_{2,y}$	0.68	-	Calculated
DFT_y	0.84	-	Calculated

 $RT_{k,y}$:

$$RT_{k,y} = \frac{NT_{BL,k}}{NT_{PJ,k,y}}$$

Where:

 $RT_{k,y}$ = Ratio of number of eligible testing items in category k (maximum value is set at 1) $NT_{BL,k}$ = Average number of eligible testing items where venting occurred per equipment in the baseline, for category k $NT_{PJ,k,y}$ = Average number of total testing items where recovery was done per equipment in the project, for category k **Results:**

Parameter	Value	Reference
$NT_{BL,1}$	2.76	The registered PDD
$NT_{BL,2}$	1.90	The registered PDD
$NT_{PJ,1,y}$	2.77	Calculated (refer to the ER Workbook)
$NT_{PJ,2,y}$	2.78	Calculated (refer to the ER Workbook)
$RT_{1,y}$	1.00	Calculated
$RT_{2,y}$	0.68	Calculated

 $NT_{PJ,k,y}$:

The average number of total testing items where recovery was done per equipment in the project in category k in the year y , ($NT_{PJ,k,y}$) are derived by using the testing records from the project year.

Category	Number of tested equipment	Number of testing items where recovery was done in year y	Average number per equipment in year y $NT_{PJ,k,y}$
----------	----------------------------	---	---

Category 1 (12 KV~ 405 KV)	35	97	2.77
Category 2 (406 KV~ 800KV)	18	50	2.78

Note: "Number of tested equipment" and "Number of testing items where recovery was done in year y" were counted in sheet "KERI data" in the ER Workbook.

E.2. Calculation of project emissions or actual net removals

>>

$$PE_y = PE_{RCL,y} + PE_{TF,y} + PE_{RF,y} + PE_{EXC,y}$$

Where:

PE_y	=	Project emissions in year y, tCO ₂ e
$PE_{RCL,y}$	=	Project emissions from emission of SF ₆ during reclamation in year y, tCO ₂ e
$PE_{TF,y}$	=	Project emissions as a result of increased electricity consumption at the testing facility attributable to project activity in year y, tCO ₂ e
$PE_{RF,y}$	=	Project emissions as a result of increased electricity consumption at the reclamation facility attributable to project activity in year y, tCO ₂ e
$PE_{EXC,y}$	=	Project emissions from exceptional event(s) at the SF ₆ reclamation site in year y, tCO ₂ e

As explained in E.1, project emissions should be divided into two periods too. They are PE₁ and PE₂, representing project emissions achieved in the 1st commitment period and 2nd commitment period.

Results:

Parameter	Value (t)	Reference
$PE_{RCL,y}$	9,477.11	Calculated
$PE_{TF,y}$	230.95	Calculated
$PE_{RF,y}$	0.08	Calculated
$PE_{EXC,y}$	45.60	Calculated
PE_y	9,754	Calculated

$PE_{RCL,y}$:

$$PE_{RCL,y} = GWP_{SF6} \cdot \sum_{j,i} (R_{SF6,y,j,i} - R_{SF6,hist,j}) \cdot P_{SF6,y,i}$$

Where

$PE_{RCL,y}$	=	Project emissions from the emission of SF ₆ during reclamation in the year y, tCO ₂ e
GWP_{SF6}	=	Global warming potential of SF ₆ , tCO ₂ e/t SF ₆
$R_{SF6,y,j,i}$	=	Rate of SF ₆ loss from point j during the reclamation period of cylinder i, in year y, %
$R_{SF6,hist,j}$	=	Historical rate of SF ₆ loss from point j, %
$P_{SF6,y,i}$	=	Production of SF ₆ during reclamation period of cylinder i in year y, t SF ₆

Results:

Parameter	Value	Reference
GWP_{SF6}	22,800	default
$R_{SF6,hist,j}$	0.058%	The registered PDD

i	$R_{SF6,y,j,i}$	$P_{SF6,y,i}$ (kg)	Reference
CDM-16007	0.129%	42,857	Measured
CDM-17001	0.231%	59,846	Measured
CDM-17002	0.120%	38,638	Measured
CDM-17003	0.196%	47,583	Measured
CDM-17004	0.160%	41,014	Measured
CDM-17005	0.129%	36,851	Measured
CDM-17006	0.151%	31,056	Measured
CDM-17007	0.162%	25,164	Measured
CDM-17008	0.246%	36,512	Measured

CDM-17009	0.013%	11,228	Measured
PE_{RCL,y}(t)		9,477.11	

$$R_{SF6,hist,j} = \frac{L_{SF6,hist,j}}{P_{SF6,hist}}$$

Where:

- $R_{SF6,hist,j}$ = Historical rate of SF₆ loss from point j , %
 $L_{SF6,hist,j}$ = Historical amount of SF₆ loss from point j , tonnes SF₆
 $P_{SF6,hist}$ = Production of SF₆ during the historical period, tonnes SF₆
 j = Sub-index used for SF₆ emission points

$R_{SF6,hist,j}$ was determined in the registered PDD as 0.058%.

$$R_{SF6,y,j} = \sum_i \frac{L_{SF6,y,j,i}}{P_{SF6,y,i}}$$

Where:

- $R_{SF6,y,j}$ = Rate of SF₆ loss from point j in year y , %
 $L_{SF6,y,j,i}$ = Amount of SF₆ loss from point j during the reclamation period of cylinder i in year y , tonnes SF₆
 $P_{SF6,y,i}$ = Production of SF₆ during the reclamation period of cylinder i , in year y , tonnes SF₆
 j = Sub-index used for SF₆ emission points

i	R _{SF6,y,j,i}	P _{SF6,y,i} (kg)/measured	L _{SF6,hist,j} /measured
CDM-16007	0.129%	42,857	55.21
CDM-17001	0.231%	59,846	138.40
CDM-17002	0.120%	38,638	46.32
CDM-17003	0.196%	47,583	93.27
CDM-17004	0.160%	41,014	65.65
CDM-17005	0.129%	36,851	47.64
CDM-17006	0.151%	31,056	46.90
CDM-17007	0.162%	25,164	40.78
CDM-17008	0.246%	36,512	89.92
CDM-17009	0.013%	11,228	1.41

PE_{TF,y}:

Rated capacity of the operating equipment: project operating equipment at the Testing Facility comprises two Compressors – 10kW; Suctioning Pump – 0.6 kW; Vacuum Pump – 1.5kW; and Evaporator – 4.8kW, 16.9 kW in total.

The “Tool to calculate baseline, project and/or leakage emissions from electricity consumption” is applied and EC_{PJ,j,y} is approximated by the rated capacity of the operating equipment multiplied by operating hours of the facility, as permitted by AM0079 version 2.

$$PE_{TF,y} = \sum_j EC_{PJ,j,y} * EF_{EL,j,y} (1 + TD L_{j,y})$$

Parameter	Value	Reference
Rated capacity of all equipment (MW)	0.0169	nameplates and manufacturer's documents
Operating hours	8,760	Conservatively estimated
EF _{EL,j,y} (tCO ₂ e/MWh)	1.3	The registered PDD
TD L _{j,y}	20%	The registered PDD
PE _{TF,y} (t)	230.95	Calculated
j	Testing facility	-

PE_{RF,y}:

Rated capacity of the operating equipment: project operating equipment added at the Reclamation Facility comprises one mass flow meter – 6 W.

Operating hours: Conservatively estimated as 8760 hr/yr.

$$PE_{RF,y} = \sum_j EC_{PJ,j,y} * EF_{EL,j,y} (1 + TDL_{j,y})$$

Parameter	Value	Reference
Rated capacity of all equipment (MW)	0.000006	MW
Operating hours	8,760	Conservatively estimated
$EF_{EL,j,y}$ (tCO ₂ e/MWh)	1.3	The registered PDD
$TDL_{j,y}$	20%	The registered PDD
$PE_{RF,y}(t)$	0.08	Calculated
j	Reclamation facility	-

$PE_{EXC,y}$:

$EXC_{SF6,y}$ is considered when an exceptional event occurred at the SF₆ reclamation site, for example an accident or emergency plant shutdown leading to the emission of SF₆ injected for reclamation.

The SF₆ quantity ($EXC_{SF6,y}$) from any reclamation that coincides with the event is considered as project emissions ($PE_{EXC,y}$). If a recovery cylinder of used gas was being reclaimed when the event occurred, then the amount of gas extracted from the cylinder between 5 hours prior to the exceptional event and the time that the injection line was closed is considered as $EXC_{SF6,y}$.

$$PE_{EXC,y} = GWP_{SF6} \cdot EXC_{SF6,y}$$

Where

- $PE_{EXC,y}$ = Project emissions from exceptional event(s) at the SF₆ reclamation site in year y, tCO₂e
- GWP_{SF6} = Global warming potential of SF₆, t CO₂e/t SF₆
- $EXC_{SF6,y}$ = Quantity of SF₆ which was being injected to the reclamation facility during exceptional events occurred in year y, tonnes SF₆

Parameter	Value	Reference
GWP_{SF6}	22,800	default
$EXC_{SF6,y} (kg)$	2.00	Measured
$PE_{EXC,y} (t)$	45.60	Calculated

E.3. Calculation of leakage emissions

>>

According to the registered PDD, the leakage emissions associated with the Project are considered to be very marginal as to be negligible compared to the range of uncertainty of the GWP estimate, and they can be ignored during the crediting period.

Therefore, $LE_y = 0$.

E.4. Calculation of emission reductions or net anthropogenic removals

	Baseline GHG emissions or baseline net GHG removals (t CO ₂ e)	Project GHG emissions or actual net GHG removals (t CO ₂ e)	Leakage GHG emissions (t CO ₂ e)	GHG emission reductions or net anthropogenic GHG removals (t CO ₂ e)		
				Before 01/01/2013	From 01/01/2013	Total amount
Total	143,076	9,754	0	0	133,322	133,322

E.5. Comparison of emission reductions or net anthropogenic removals achieved with estimates in the registered PDD

Amount achieved during this monitoring period (t CO ₂ e)	Amount estimated ex ante (t CO ₂ e)
133,322	165,544


E.6. Remarks on increase in achieved emission reductions

>>

The actual values achieved during this monitoring period are 133,322 tons, less than the values estimated in ex-ante calculation of registered PDD.

Appendix 1. Organizational structure of CDM monitoring

Organizational structure of CDM Monitoring at the South Korea SF6 Recovery and Reclamation Project

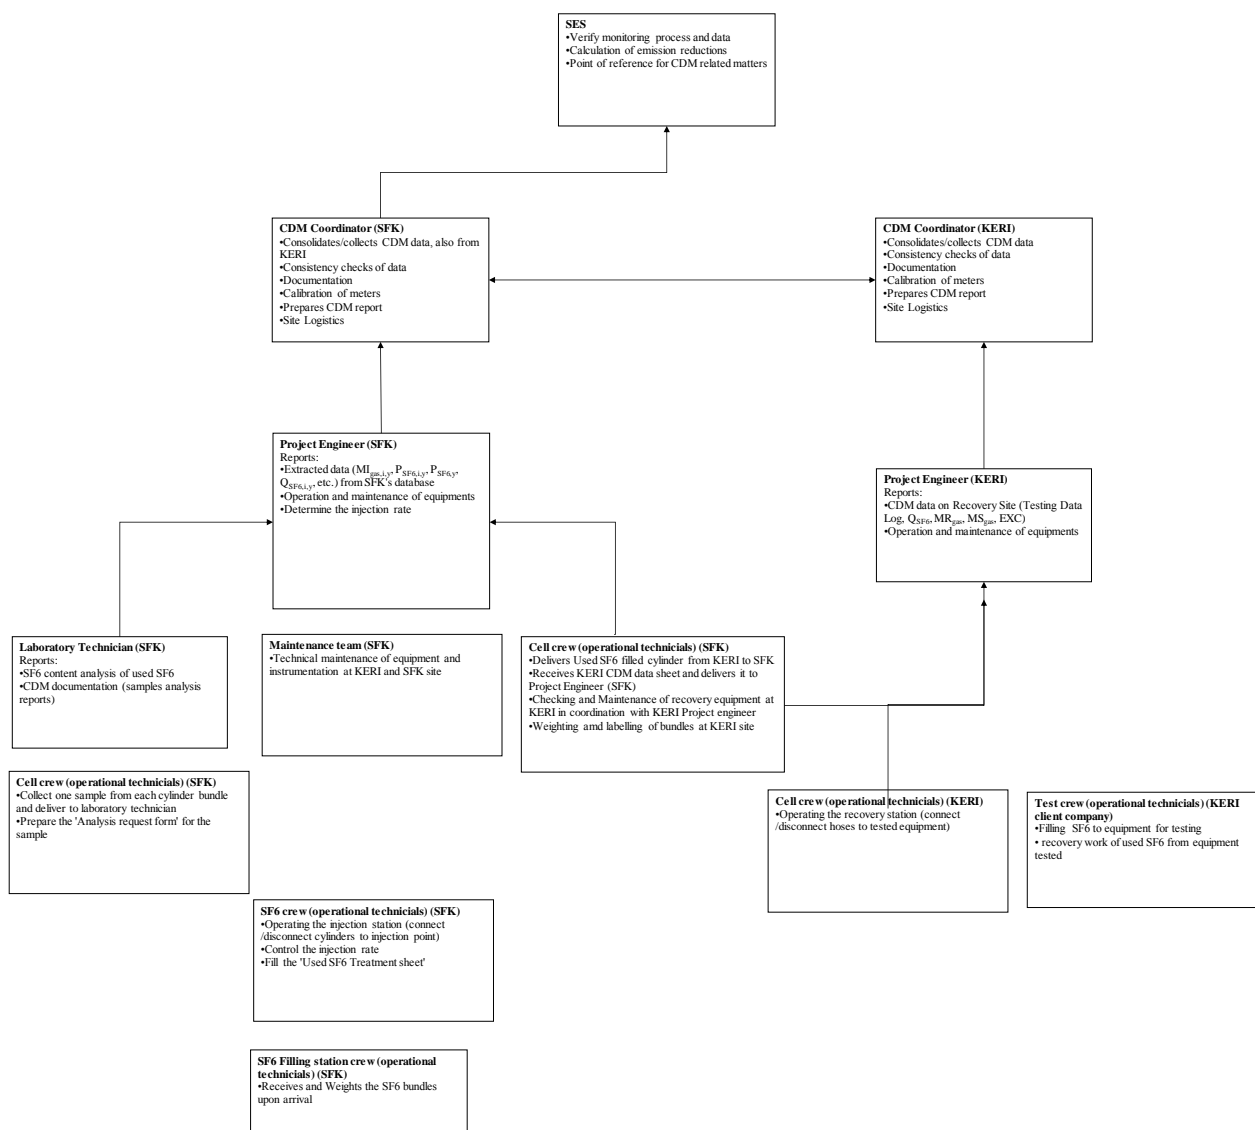

Document information

<i>Version</i>	<i>Date</i>	<i>Description</i>
06.0	7 June 2017	Revision to: <ul style="list-style-type: none"> • Ensure consistency with version 01.0 of the “CDM project standard for project activities” (CDM-EB93-A04-STAN); • Make editorial improvements.
05.1	4 May 2015	Editorial revision to correct version numbering.
05.0	1 April 2015	Revisions to: <ul style="list-style-type: none"> • Include provisions related to delayed submission of a monitoring plan; • Provisions related to the Host Party; • Remove reference to programme of activities; • Overall editorial improvement.
04.0	25 June 2014	Revisions to: <ul style="list-style-type: none"> • Include the Attachment: Instructions for filling out the monitoring report form (these instructions supersede the "Guideline: Completing the monitoring report form" (Version 04.0)); • Include provisions related to standardized baselines; • Add contact information on a responsible person(s)/ entity(ies) for completing the CDM-MR-FORM in A.6 and Appendix 1; • Change the reference number from <i>F-CDM-MR</i> to <i>CDM-MR-FORM</i>; • Editorial improvement.
03.2	5 November 2013	Editorial revision to correct table in page 1.
03.1	2 January 2013	Editorial revision to correct table in section E.5.
03.0	3 December 2012	Revision required to introduce a provision on reporting actual emission reductions or net GHG removals by sinks for the period up to 31 December 2012 and the period from 1 January 2013 onwards (EB 70, Annex 11).
02.0	13 March 2012	Revision required to ensure consistency with the "Guidelines for completing the monitoring report form" (EB 66, Annex 20).
01.0	28 May 2010	EB 54, Annex 34. Initial adoption.
Decision Class: Regulatory Document Type: Form Business Function: Issuance Keywords: monitoring report		